

22 KLM Lighting

CURVY MAGNETIC TRACK

Recessed

KLM Lighting



餐厅&宴会厅

Restaurant &
Banquet Hall

GD22D1500Y/L1/4

GD22 200Y/L1/4
D1

GD22D600Y/L1/2

DC24V安全电压，可随意触碰

Recessed –HalfRound



Free touch
DC24V Voltage, Safe Touch



Seamless

Accessories...



Connect



Power Cable



End of cap




New...

KLM Lighting




Item No. :
KLM-GD22D600Y/L1/2Installation :
Recessed
Size : W73*H52*ø600mmControl :
Single group/multi-group control
Material : 6063 Aluminum
Body color : Sand BK/WH
Cut hole : Outer608mm ,
Inner528mm, Height65 (Length
depends on arc length)
IP Rate : IP20Ceiling Thickness :
9mm

Magnetic Track Bar mm



Size(mm)




1/2Round arc length

Seamless type




Installation

Keel installation Recessed



Pre-buried wooden box Recessed

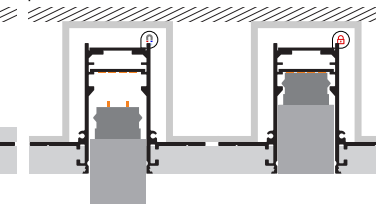

009

010




Recessed –HalfRound




Free touch
DC24V Voltage, Safe Touch

Item No. :
KLM-GD22D900Y/L1/2
Installation :
Recessed
Size : W73*H52*Ø900mm
Control :
Single group/multi-group control
Material : 6063 Aluminum
Body color : Sand BK/VH
Cut hole : Outer 908mm,
Inner 828mm, Height 65 (Length
depends on arc length)
IP Rate : IP20
Ceiling Thickness :
95mm (mm)



Magnetic Track Bar mm



1/2 Round arc length

KLM Lighting

Seamless



Accessories...



Connect




Power Cable



End of cap



Lamps




New...

Seamless type



Installation

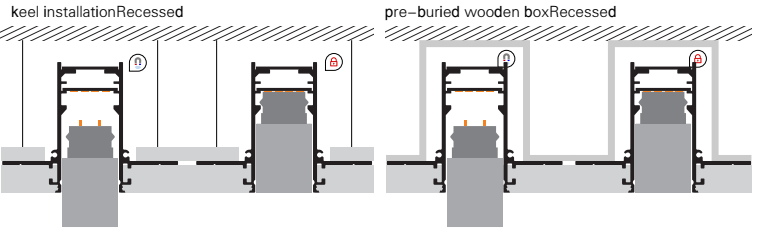

Recessed




Recessed – 1/4Round

Free touch
DC24V Voltage, Safe Touch




Item No. :
KLM-GD22D1200Y/L1/4
Recessed
W73*H52*Ø1200mm
BK/WH Cut hole: Outer1208mm,
Inner1128mm, High65
(Length depends on arc length)
IP Rate: IP20
Ceiling thickness: 9mm

Magnetic Track Bar mm



Size(mm)



1/4Round arc length

Accessories...



Connect




Power Cable



End of cap




Lamps



New...




Seamless type

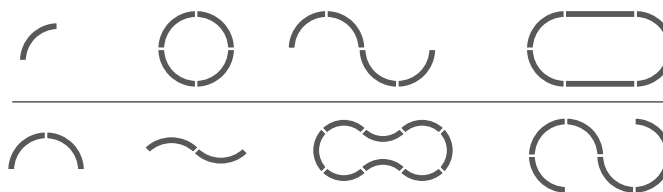


Installation

Keel installationRecessed




pre-buried wooden boxRecessed

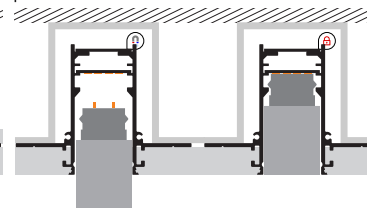



Recessed -1/4Round


Item No.:
 KLM-GD22D1500Y/L1/4 Recessed Installation
 W73*H52*Ø1500mm
 Body color: Sand BK/VH
 Cut hole: Outer1508mm,
 Inner1428mm, Hi h65 (Len th
 depends on arc len th)
 IP Rate: IP20Ceilin Thinkness:
 9mm

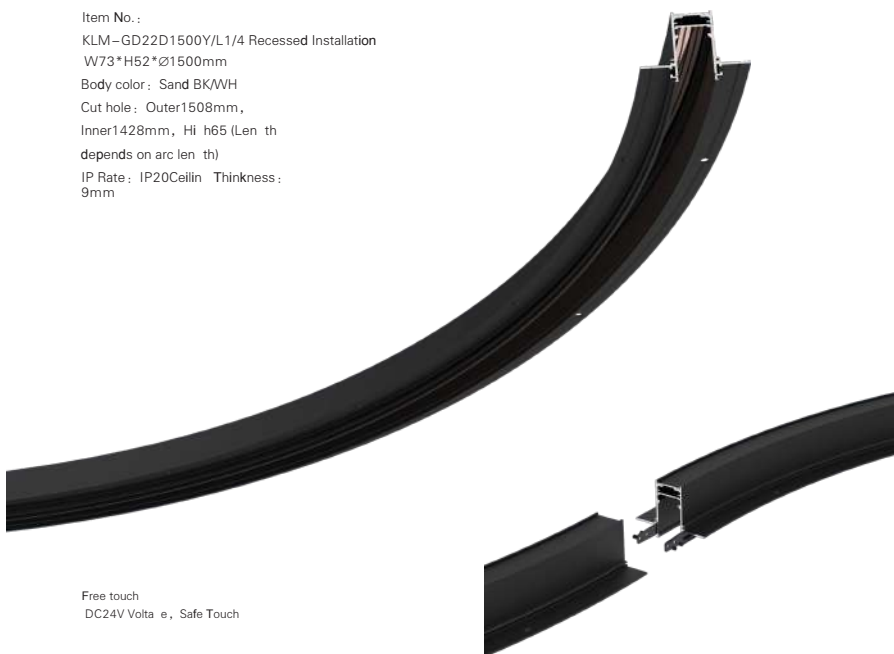


Free touch
 DC24V Voltage, Safe Touch



magnetic Track Barmm



Size(mm)



1/4Roundarc len th

Accessories...



Connect



Power Cable




End of cap



Lamps


New...

Seamless type

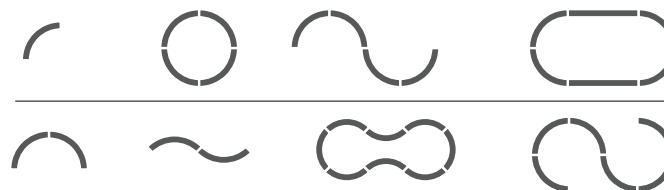


Installation

keel installationRecessed

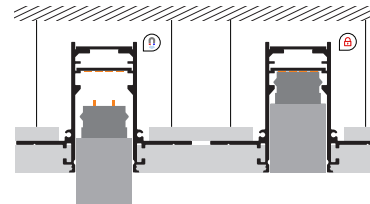

pre-buried wooden boxRecessed

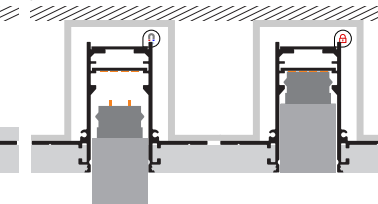




Recessed – 1/4Round

Free touch
DC24V Voltage, Safe Touch



Magnetic Track Bar



Accessories...



Connect



Power Cable



End of cap




Lamps

New...




KLM Lighting

Item No. :
KLM-GD22D1800Y/L1/4Installation :
Recessed
Size : W73*H52*Ø1800mmControl :
Single group/multi-group control
Material : 6063 Aluminum
Body color : Sand BK/WH
Cut hole : Outer1808mm,
Inner1728mm, Height65 (Length
depends on arc length)
IP Rate : IP20Ceiling Thickness : 9mm
Size(mm)




1/4Round arc
length

Seamless type

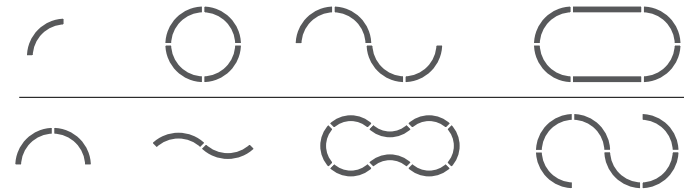


Installation

Keel installationRecessed



Pre-buried wooden boxRecessed

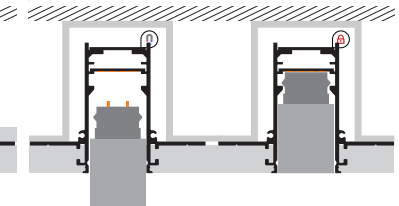



KLM Lighting



采用DC24V安全电压设计，正常DC24V电压断电可触值。


Recessed



Free touch
DC24V Voltage, Safe Touch

Item No.: KLM-GD7052Y/L1000/H
Installation: Recessed
Size: W70*H52mm
Product Specification: L500/1000/2000mm
Control: Single group/multi-group control
Material: 6063 Aluminum
Body color: Sand BK/WH
Cut hole: W40*H65mm
IP Rate: IP20
Ceiling Thickness: 9mm

magnetic Track Bar



Accessories...



Pen light



180° Adjustable



180° Adjustable



Wall washer



Connect




End of cap




Power Cable


Installation



Keel installation Recessed




Pre-buried wooden box Recessed

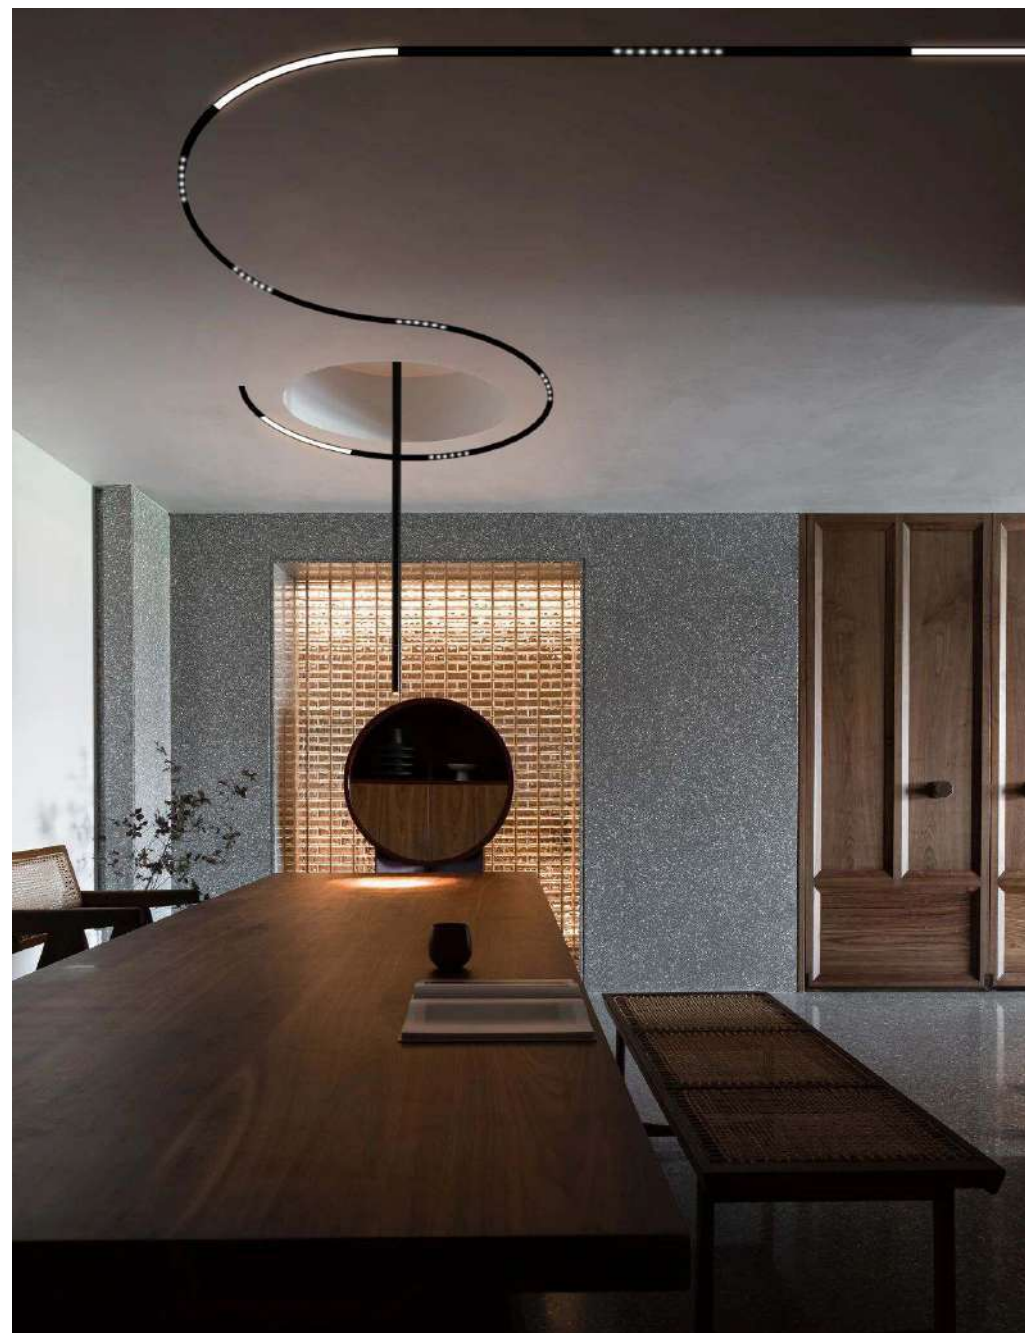

GD22D1500D/L1/4

GD22D600D/L1/2

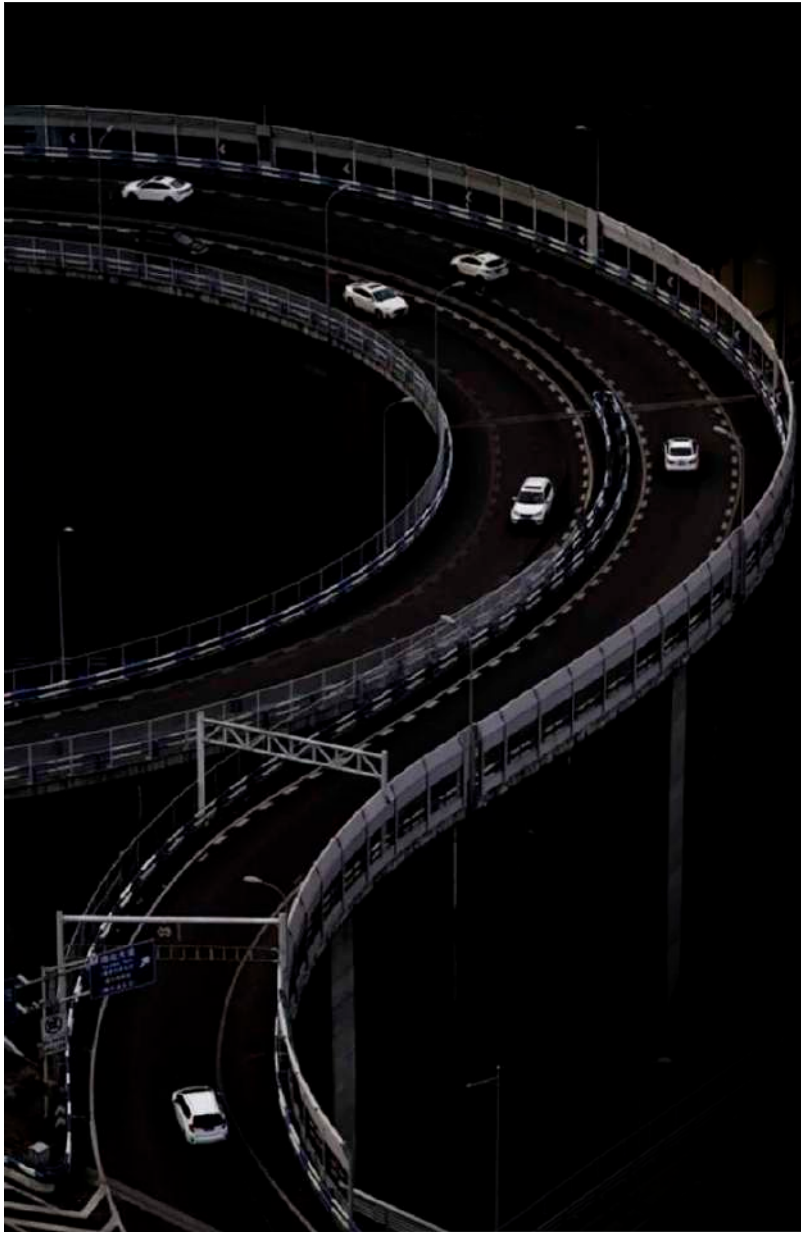

Do what you want

Arc




Surface


Suspended/Surface Mounted



Free touch
DC24V Voltage, Safe Touch

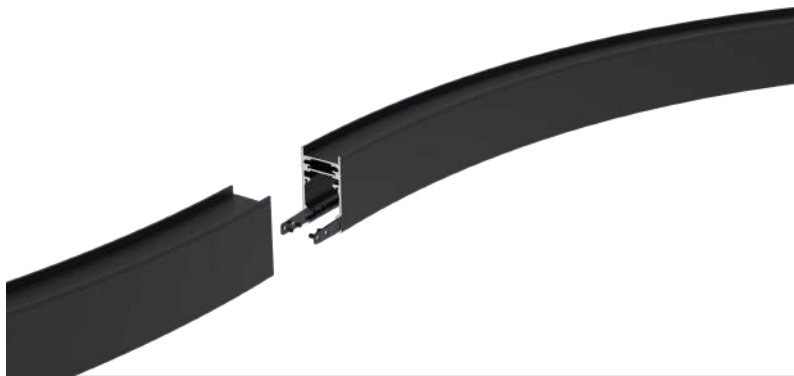

Accessories...




Driver box 50W/100W



Suspended Kits



2PIN



Surface Kits



New...


KLM Lighting



Suspended/Surface Mounted -HalfRound

Item No. : KLM-GD22D600D/L1/2
Installation : Suspended/Surface Mounted
Size : W32*H56*Ø600mm
Control : Single group/multi-group control
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20

Size(mm)



1/2Roundarc length




Seamless type



Installation

Suspended

Surface



Magnetic Track Bar mm

Suspended/Surface Mounted




Free touch
DC24V Voltage, Safe Touch

Accessories...




Driver box 50W/100W



Connect



End of cap




Power cable



Lamps




Suspended Kits




2PIN



Surface Kits




New...

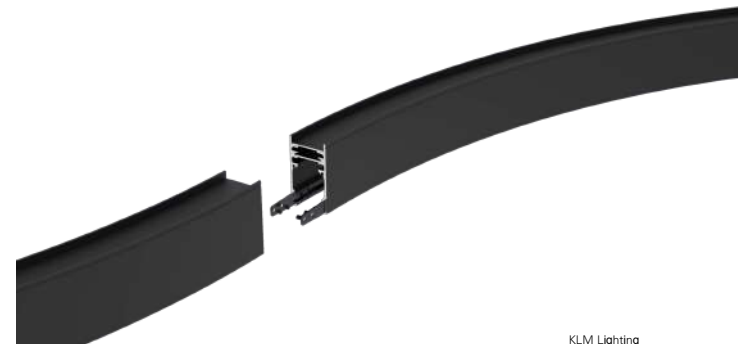

KLM Lighting


Suspended/Surface Mounted -HalfRound

Size(mm)



1/2 Round arc length

Item No.: KLM-GD22D900D/L1/2
Installation: Suspended/Surface Mounted
Size: W32 * H56 * Ø900mm
Control: Single group/multi-group control
Material: 6063 Aluminum
Body color: Sand BK/WH
IP Rate: IP20
Seamless type

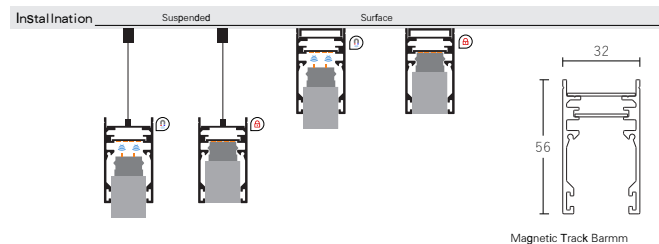

Suspended/Surface Mounted


Free touch
DC24V Voltage, Safe Touch




Suspended/Surface Mounted - 1/4Round

Item No.:
KLM-GD22D1200D/L1/4

Installation:
Suspended/Surface Mounted
Size: W32*H56*Ø1200mm
Control: Single
group/multi-group control
Material: 6063 Aluminum
Body color: Sand BK/VH
IP Rate: IP20



Accessories



Driver box 50W/100W




Connect



Suspended Kits



End of cap



2PIN




Power cable



Surface Kits




Lamps



New...




Seamless type

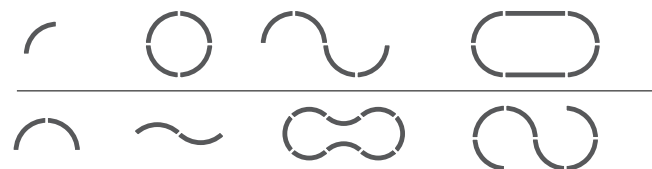


Installation


Suspended



Surface



Magnetic Track Bar mm

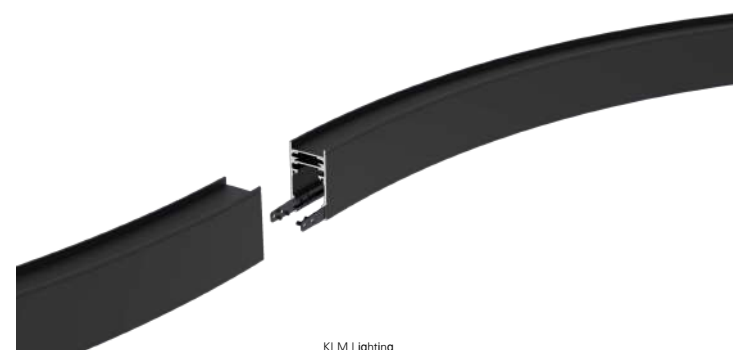


KLM Lighting



轨道拼接示意



Size(mm)



1/4Round arc length

Item No.: KLM-GD22D1800D/L1/4

Installation: Suspended Surface

Size: W32*H56*Ø1800mm

Control: Single group / multi-group

Material: 6063 Aluminum

Body color: Sand BK/WH

IP Rate: IP20

Accessories

Driver
box 50W/100W

Connector



End of Cap



Power Cable



Lamps



Suspended Kits



2 PIN





Surface Kits




New...

Seamless type

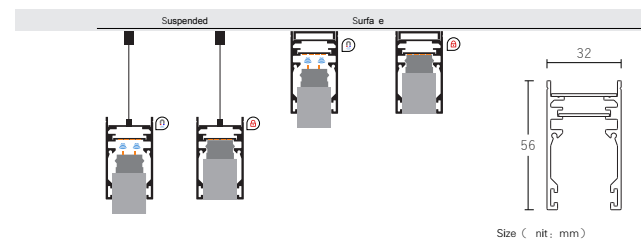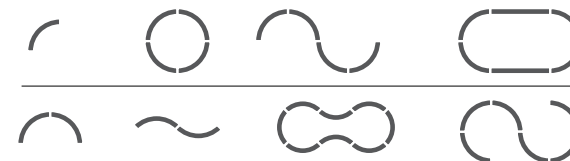

Size (unit: mm)

Suspended/Surface Mounted

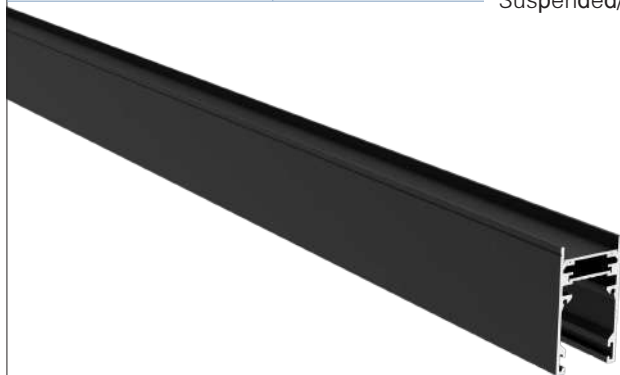

Free touch
DC24V Voltage, Safe Touch



Suspended/Surface Mounted

Item No. : KLM-GD3256D/L1000/H

Installation : Suspended/Surface Mounted

Size : W32*H56mm


产品规格 : L1000/1500/2000mm

Control : Single group/multi-group control

Material : 6063 Aluminum

Body color : Sand BK/WH


IP Rate : IP20

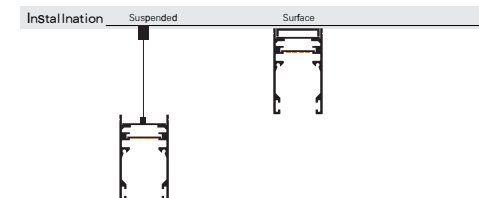

Seamless



Magnetic Track Bar 32mm



Magnetic Track Bar 32mm

Accessories...



Driver box 50W/100W



Connect



Suspended Kits



End of cap



2PIN



Power cable



Surface Kits



Lamps




New...

22mm Suspended / Surface mounted




Item no KLM-GD22D1500D/L1/4
 Installation: Suspended / Surface
 Size: W32*H56*Ø1500mm
 Control: Single group / multi-group
 Material: 6063 Aluminum
 Body color: Sand BK/WH
 IP Rate : IP20

Size(mm)



1/4Round arc length




Size (unit: mm)



Accessories




Seamless type

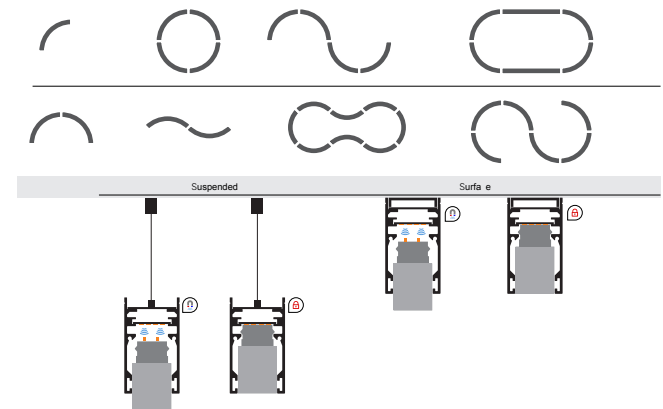




AllControl

1 2 3 4

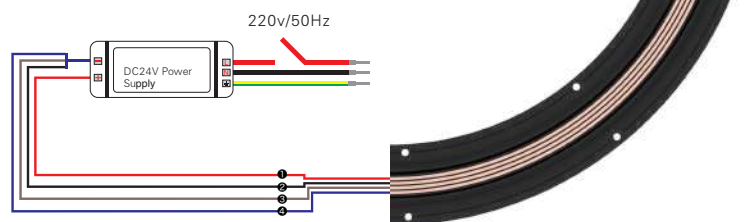

Three groups of conventional sub-control

1 2 3 4

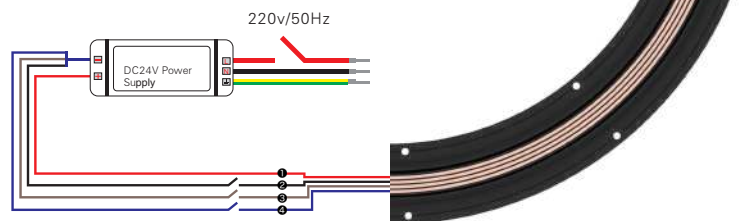


Remark.....

- 1. All Curvy Magnetic with 24V, need to extra connect with power supply. Power supply watts must more than all lights at least 20%. E.g: total 5pc led light, 12w/pc, total power 60W, so power supply should be up 75W more.
- 2. Connect Max 5m, we suggest better 3m/sets




Recessed mounted


Recessed type

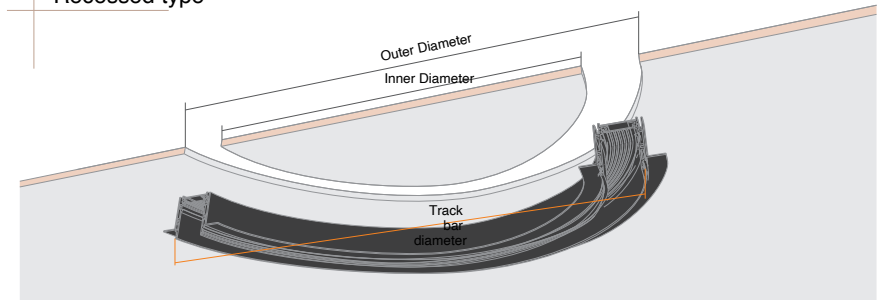

龙骨预埋式




木盒预埋式




Item no.:
KLM-GD22D600Y/L1/2Size;
W73*H52mm

Size: Outer Dia608mm,
Inner Dia528mmCut
holeHigh: ≥65mm

龙骨预埋式




木盒预埋式




Item no.:
KLM-GD22D900Y/L1/2Size;
W73*H52mm

Size: Outer Dia908mm,
Inner Dia828mmCut
holeHigh: ≥65mm

龙骨预埋式




木盒预埋式




Item no.:
KLM-GD22D1200Y/L1/4Size;
W73*H52mm

Size: Outer Dia1208mm,
Inner Dia1128mmCut
holeHigh: ≥65mm

龙骨预埋式




木盒预埋式




Item no.:
KLM-GD22D1500Y/L1/4Size;
W73*H52mm

Size: Outer Dia1508mm,
Inner Dia1428mmCut
holeHigh: ≥65mm

龙骨预埋式



木盒预埋式



Item no.:
KLM-GD22D1800Y/L1/4Size;
W73*H52mm

Size: Outer Dia1808mm,
Inner Dia1728mmCut
holeHigh: ≥65mm


free touch

24V safe voltage


三谷照明 做您所想




龙骨预埋式安装




按照轨道开孔尺寸预留轨道安装空间。




将轨道嵌入到安装槽内，用自攻螺丝钉把轨道固定好。




连接轨道供电系统（详见接线示意图）

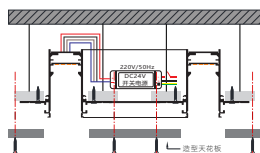

确认完全连接好供电系统，并确保轨道供电全线畅通，然后安装造型天花板。

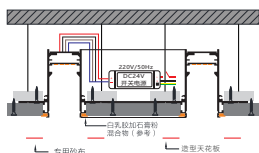


用白乳胶加石膏粉混合（参考）填补轨道与天花板之间的缝隙，再用专用砂布粘上补好，缝口处补好后待干透。

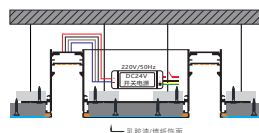


做天花饰面，饰面做乳胶漆/墙纸/其他，完成天花饰面后，移除安装定位盖/施工防护盖，安装灯具，合上电闸亮灯。


木盒预埋式安装

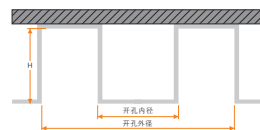


制作木盒安装槽，按照轨道开孔尺寸预留轨道安装空间

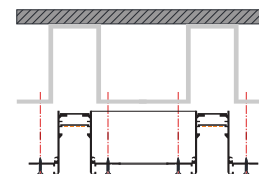


固定制作好的木盒安装槽，再将轨道嵌入到安装槽内，用自攻螺丝钉把轨道固定好。

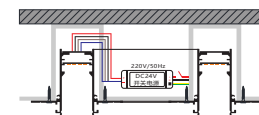


连接轨道供电系统（详见接线示意图）

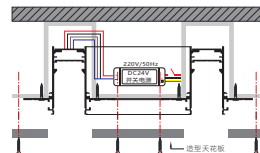

确认完全连接好供电系统，并确保轨道供电全线畅通，然后安装造型天花板。

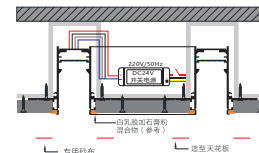


用白乳胶加石膏粉混合（参考）填补轨道与天花板之间的缝隙，再用专用砂布粘上补好，缝口处补好后待干透。

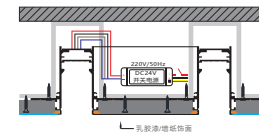

做天花饰面，饰面做乳胶漆/墙纸/其他，完成天花饰面后，移除安装定位盖/施工防护盖，安装灯具，合上电闸亮灯。



悬挂式安装方式

- 1 定好 安装位置，按照轨道的孔位打，打上膨胀螺丝（如果是木板，直接打自攻螺丝）
- 2 用螺丝钉将灯具悬挂配件固定好。
- 3 将悬挂钢丝上的螺母与轨道上的螺钉配合拧紧。
- 4 按照示意图把钢丝先串好，再把堵头拧紧，然后用钢丝调好轨道的悬挂高。
- 5 链接DC24V电源（详见接线示意图），确保电源畅通，装上灯具，打开电闸亮灯。

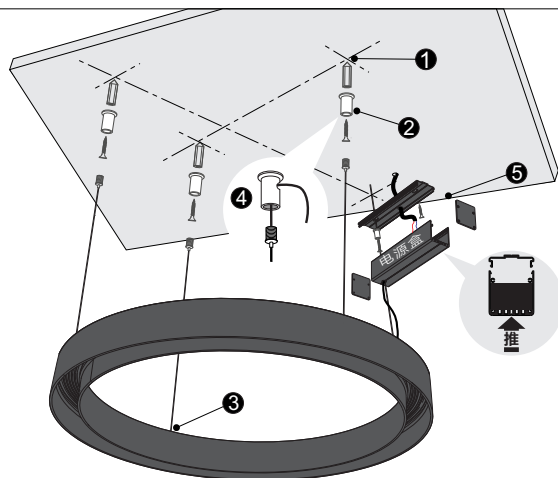

吸顶式安装方式

- 1 定好 安装位置，按照轨道的孔位打，打上膨胀螺钉（如果是木板，直接打自攻螺丝）
- 2 用螺丝钉将轨道挂板固定好。
- 3 将轨道放进挂板上对好螺丝孔位，拧紧螺丝固定灯具。
- 4 链接DC24V电源（链接方式参考接线示意图），确保电源畅通，装上灯具，打开电闸亮灯。

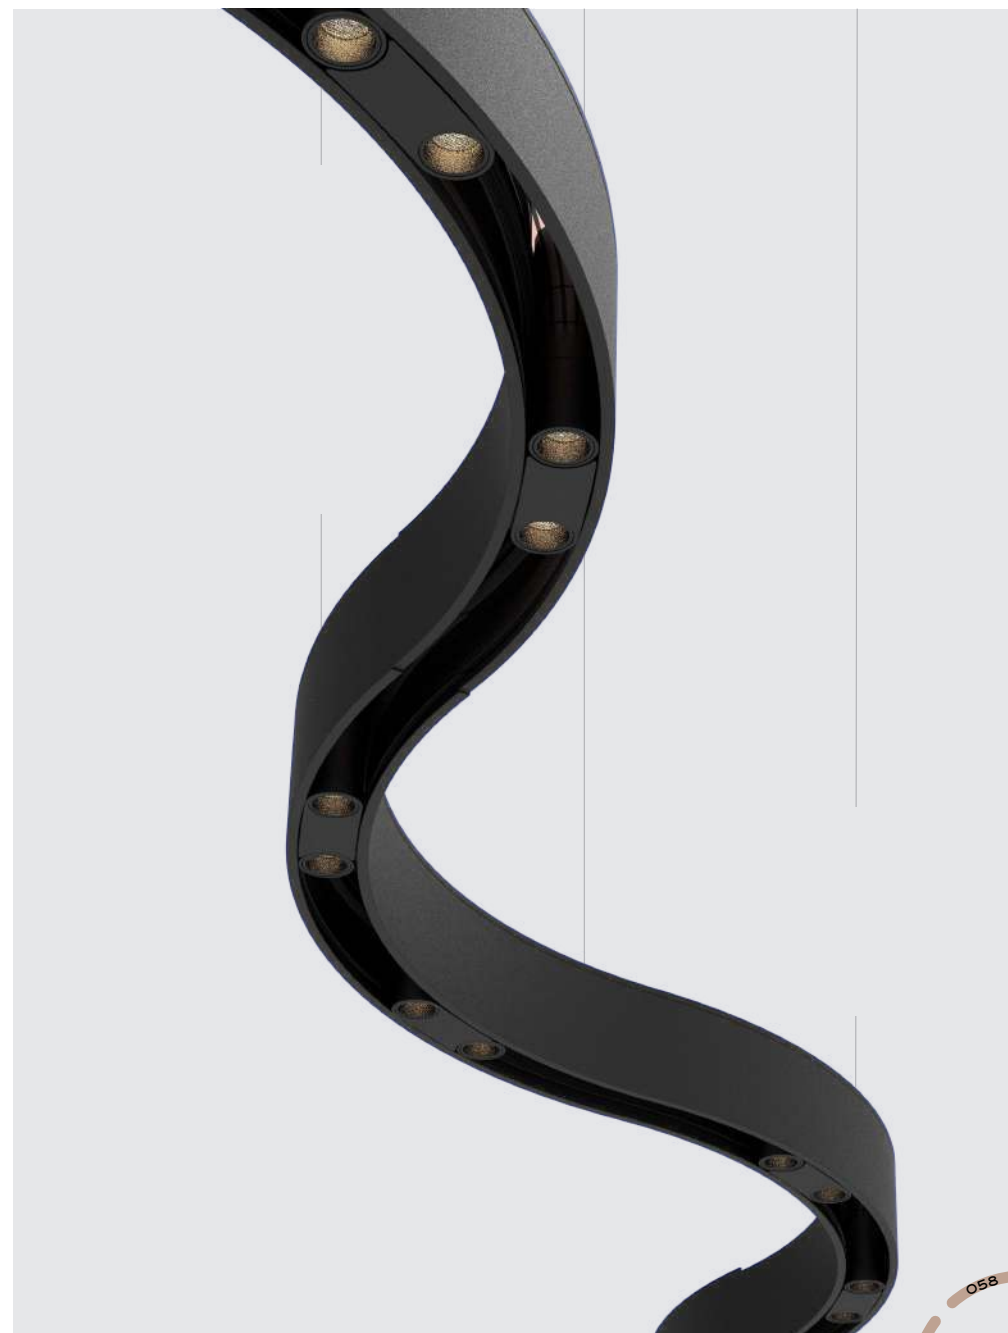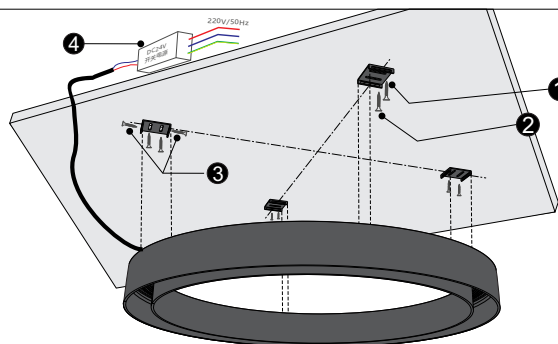



Magnetic Lamps design



22 Curvy Magnetic Lighting.....

22MM Curcy Magnetic

Single type



KLM-GSD2240
H/
L73/1W



KLM-GSD2240
H/
L73/2W



KLM-ZHD2240
H/
L73/2W



KLM-SD2265
H/
3W



KLM-SD223463
H/
5W



KLM-DXD226068
H/
5W

Multi-module combination



KLM-GSD2240
H/
L124/3W



KLM-GSD2240
H/
L175/4W



KLM-GSD2240
H/
L226/5W



KLM-GSD2240
H/
L277/6W



KLM-GSD2240
H/
L328/7W

Multi-module combination



KLM-ZHD2240
H/
L124/4W



KLM-ZHD2240
H/
L175/5W



KLM-ZHD2240
H/
L226/6W



KLM-ZHD2240
H/
L277/7W



KLM-ZHD2240
H/
L328/8W



KLM-ZHD2240
H/
L124/6W



KLM-ZHD2240
H/
L175/7W



KLM-ZHD2240
H/
L226/8W



KLM-ZHD2240
H/
L277/9W



KLM-ZHD2240
H/
L328/10W

Single type



KLM-PMD2240
H/
L340/3W



KLM-PMD2240
H/
L518/5W



KLM-PMD2240
H/
L730/7W




KLM-PMD2240
H/
L908/9W

22MM Curcy Magnetic



Size/mm

Item No.: KLM-GSD2240H/L73/1W
Size: W22*H40*L73mm
Material: 6063 Aluminum
Body color: Sand BK/WH
IP Rate: IP20
Dimmable: NO DIM
LEDs: Osram
Voltage: DC24V
Power: 1W (1x1W LED)
CCT: 2700K/3000K/4000K
CRI: ≥90
Beam angle: 15° /24°



IES


Beam angle	15°	24°																														
	187.6 lm	94.5																														
	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>283.66</td><td>0.41</td></tr><tr><td>2.25</td><td>126.03</td><td>0.61</td></tr><tr><td>3.50</td><td>52.10</td><td>0.95</td></tr><tr><td>4.00</td><td>39.88</td><td>1.08</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	283.66	0.41	2.25	126.03	0.61	3.50	52.10	0.95	4.00	39.88	1.08	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>153.15</td><td>0.76</td></tr><tr><td>2.25</td><td>68.07</td><td>1.14</td></tr><tr><td>3.50</td><td>28.13</td><td>1.77</td></tr><tr><td>4.00</td><td>21.54</td><td>2.03</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	153.15	0.76	2.25	68.07	1.14	3.50	28.13	1.77	4.00	21.54	2.03
h(m)	E0°(lx)	ø(m)																														
1.50	283.66	0.41																														
2.25	126.03	0.61																														
3.50	52.10	0.95																														
4.00	39.88	1.08																														
h(m)	E0°(lx)	ø(m)																														
1.50	153.15	0.76																														
2.25	68.07	1.14																														
3.50	28.13	1.77																														
4.00	21.54	2.03																														
(cd																																



agnetic track bar



CCT

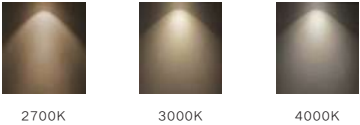


22MM Curcy Magnetic



Size/mm

Item No.: KLM-GSD2240H/L73/2W
Size: W22*H40*L73mm
Material: 6063 Aluminum
Body color: Sand BK/WH
IP Rate: IP20
Dimmable: NO DIM
LEDs: Osram
Voltage: DC24V
Power: 2W (2x1W LED)
CCT: 2700K/3000K/4000K
CRI: ≥90
Beam angle: 15° /24°



IES

agnetic track bar

Beam angle		15°	24°		
		187.6 lm	94.5		
h(m)	E0°(lx)	ø(m)	h(m)	E0°(lx)	ø(m)
1.50	283.66	0.41	1.50	153.15	0.76
2.25	126.03	0.61	2.25	68.07	1.14
3.50	52.10	0.95	3.50	28.13	1.77
4.00	39.88	1.08	4.00	21.54	2.03

(cd

C0/C180:

C90/C270:



22弧形预埋



22弧形悬挂/吸顶

CCT



2700K



3000K



4000K



可调光



安装方便



高显指



无频闪



高效节能



名牌设计



环保材料

22MM Curcy Magnetic



Size/mm

Item No.: KLM-ZHD2265H/L73/2W

Size: $\varnothing 22 \times L65\text{mm}$

Material: 6063 Aluminum

Body color: Sand BK/WH

IP Rate: IP20

Dimmable: NO DIM

LEDs: Osram


Voltage: DC24V

Power: 2W (1W+1W LED)

CCT: 2700K/3000K/4000K


CRI: ≥ 90

Beam angle: 15° /24°

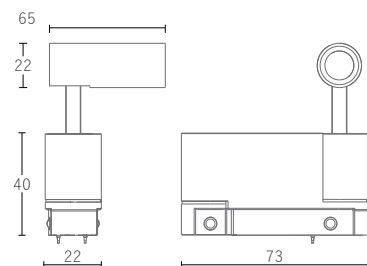

IES

15° Beam angle				24°			
246.3 lm				166.6 lm			
h(m)	E0°(lx)	ø(m)		h(m)	E0°(lx)	ø(m)	
1.50	773.66	0.41		1.50	328.86	0.60	
2.25	343.85	0.61		2.25	146.16	0.90	
3.50	142.10	0.95		3.50	60.40	1.40	
4.00	108.80	1.08		4.00	46.25	1.60	



agnetic track bar



22弧形预埋



22弧形
悬挂/吸顶

CCT



2700K



3000K



4000K



可调光



安装方便



高显指



无频闪



高效节能



名馆设计




环保材料

22MM Curcy Magnetic




Size/mm

Item No.: KLM-SD2265H/3W
 Size: $\varnothing 22 \times L65$ mm
 Material: 6063 Aluminum
 Body color: Sand BK/WH
 IP Rate: IP20
 Dimmable: NO DIM
 LEDs: Osram
 Voltage: DC24V
 Power: 3W (1x3W LED)
 CCT: 2700K/3000K/4000K
 CRI: ≥ 90
 Beam angle: 15° /24°

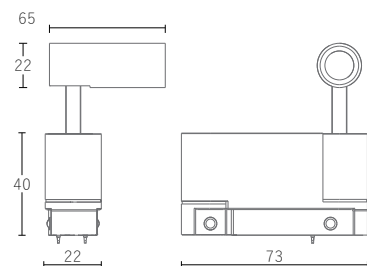

IES

15° Beam angle				24°			
246.3 lm				166.6 lm			
h(m)	E0°(lx)	ø(m)		h(m)	E0°(lx)	ø(m)	
1.50	773.66	0.41		1.50	328.86	0.60	
2.25	343.85	0.61		2.25	146.16	0.90	
3.50	142.10	0.95		3.50	60.40	1.40	
4.00	108.80	1.08		4.00	46.25	1.60	

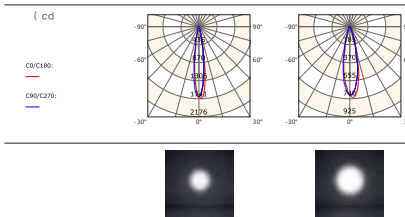

agnetic track bar



22弧形预埋



22弧形
悬挂/吸顶

CCT



2700K



3000K



4000K




可调光 安装方便 高显指 无频闪 高效节能 独特设计 环保材料

22MM Curcy Magnetic



Size/mm

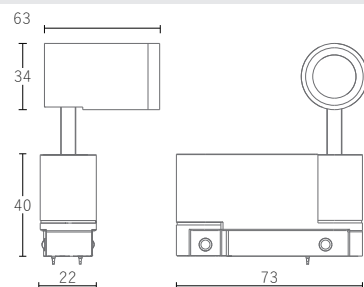


Item No.: KLM-SD223463H/5W
 Size: $\varnothing 34 \times L63$ mm
 Material: 6063 Aluminum
 Body color: Sand BK/WH
 IP Rate: IP20
 Dimmable: NO DIM
 LEDs: Osram
 Voltage: DC24V
 Power: 5W (1x5W/LED)
 CCT: 2700K/3000K/4000K
 CRI: ≥ 90
 Beam angle: 15° /24° /38°



IES

Beam angle	15°	24°	38°																																													
	345.3 lm	403.8 lm	258.5 lm																																													
	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>1018.54</td><td>0.56</td></tr><tr><td>2.25</td><td>452.69</td><td>0.84</td></tr><tr><td>3.50</td><td>187.08</td><td>1.30</td></tr><tr><td>4.00</td><td>143.23</td><td>1.48</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	1018.54	0.56	2.25	452.69	0.84	3.50	187.08	1.30	4.00	143.23	1.48	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>535.86</td><td>0.64</td></tr><tr><td>2.25</td><td>238.16</td><td>0.96</td></tr><tr><td>3.50</td><td>98.42</td><td>1.49</td></tr><tr><td>4.00</td><td>75.36</td><td>1.71</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	535.86	0.64	2.25	238.16	0.96	3.50	98.42	1.49	4.00	75.36	1.71	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>196.43</td><td>1.16</td></tr><tr><td>2.25</td><td>87.30</td><td>1.75</td></tr><tr><td>3.50</td><td>36.08</td><td>2.72</td></tr><tr><td>4.00</td><td>27.62</td><td>3.11</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	196.43	1.16	2.25	87.30	1.75	3.50	36.08	2.72	4.00	27.62	3.11
h(m)	E0°(lx)	ø(m)																																														
1.50	1018.54	0.56																																														
2.25	452.69	0.84																																														
3.50	187.08	1.30																																														
4.00	143.23	1.48																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	535.86	0.64																																														
2.25	238.16	0.96																																														
3.50	98.42	1.49																																														
4.00	75.36	1.71																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	196.43	1.16																																														
2.25	87.30	1.75																																														
3.50	36.08	2.72																																														
4.00	27.62	3.11																																														

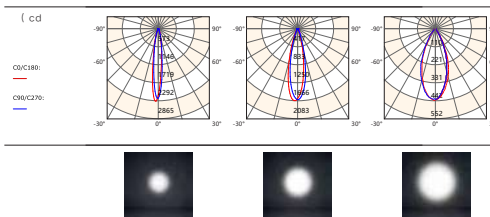

agntic track bar



22弧形预埋

22弧形悬挂/吸顶

CCT



2700K

3000K

4000K



可调光



安装方便



高显指



无频闪



高效节能



名师设计




环保材料



22MM Curcy Magnetic

Size: mm




Silicone spray paint


NEW TOP Quality


agentic track bar

076

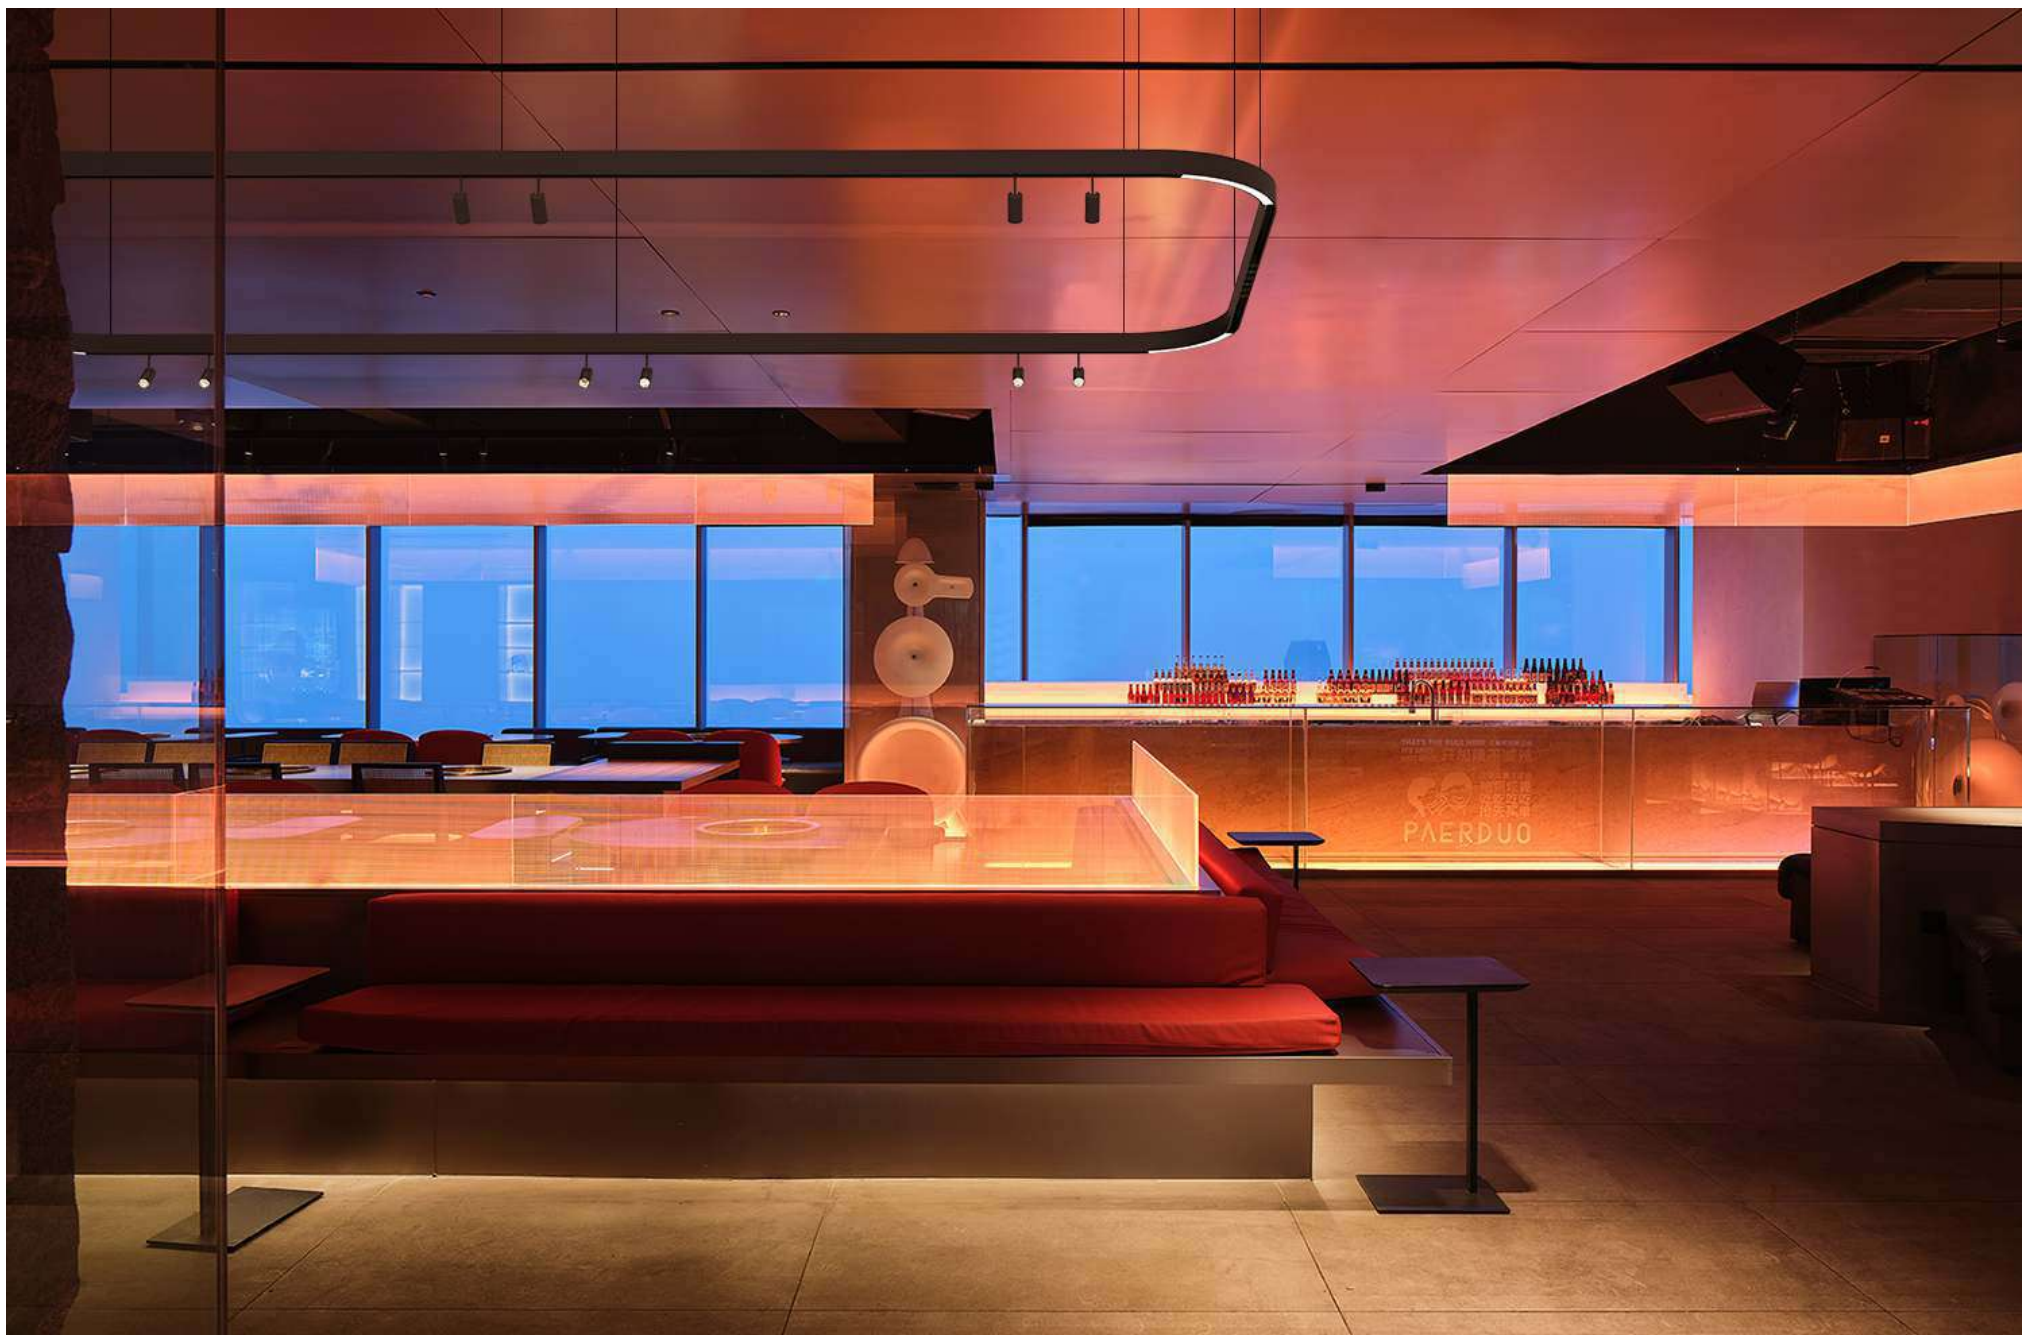


A 弧形组合格栅灯
Arc combination
Grille lamp

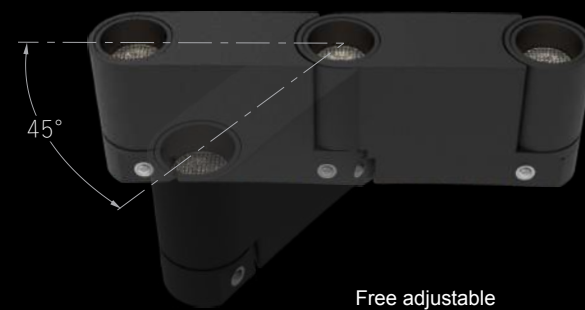





Item No. :
KLM-GSD2240H/L124/3W
Size : L124*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 3W (3x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24°




Item No. :
KLM-GSD2240H/L175/4W
Size : L175*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 4W (4x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24°



Item No. :
KLM-GSD2240H/L328/7W
Size : L328*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 7W (7x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24°




Item No. :
KLM-GSD2240H/L226/5W
Size : L226*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 5W (5x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24°

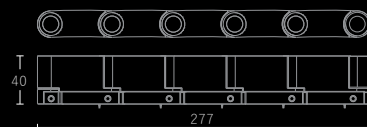


Item No. : KLM-GSD2240H/L277/6W
Size : L277*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 6W (6x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24°







Item No. :
KLM-ZHD2240H/L124/4W
Size : L124*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 4W (3W+1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°




Item No. :
KLM-ZHD2240H/L175/5W
Size : L175*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 5W (3W+2x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°

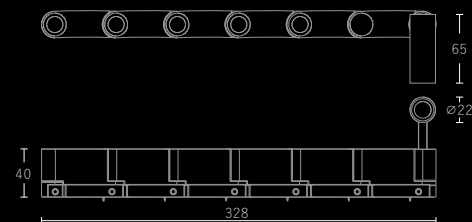


Item No. :
KLM-ZHD2240H/L328/8W
Size : L328*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 8W (3W+5x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°




Item No. :
KLM-ZHD2240H/L226/6W
Size : L226*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 6W (3W+3x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°

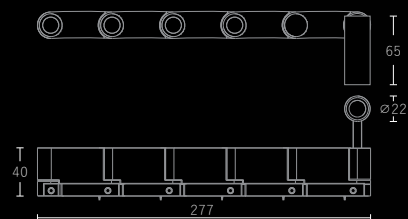


Item No. : KLM-ZHD2240H/L277/7W
Size : L277*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 7W (3W+4x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°

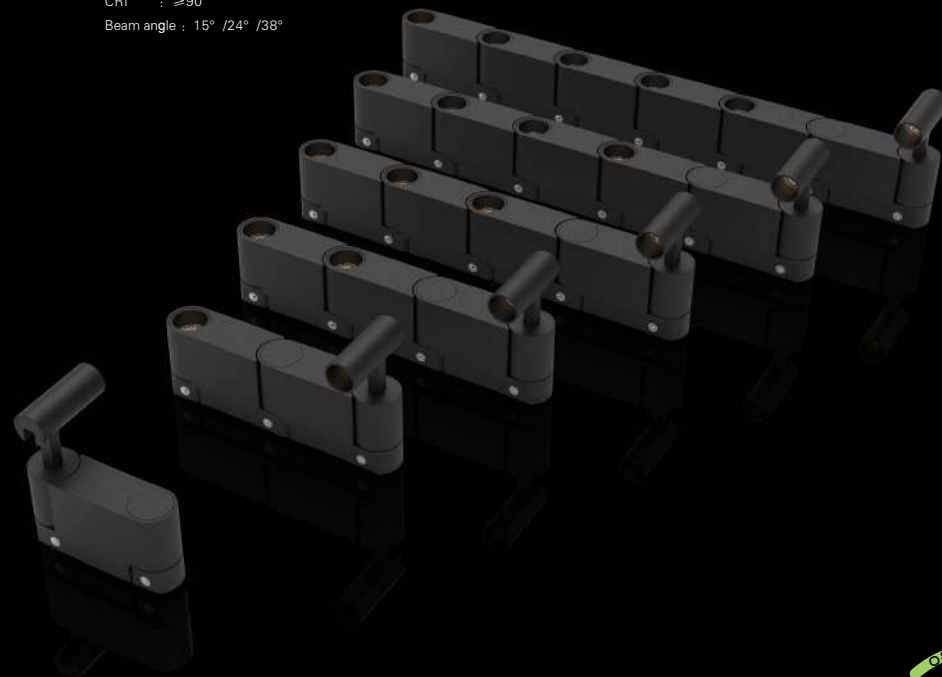





Item No. :
KLM-ZHD2240H/L124/6W
Size : L124*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 6W (5W+1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°




Item No. : KLM-ZHD2240H/L175/7W
Size : L175*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 7W (5W+2x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°

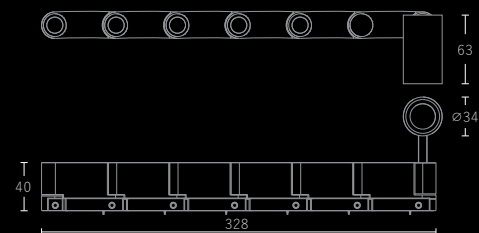


Item No. :
KLM-ZHD2240H/L328/10W
Size : L328*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 10W (5W+5x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°



Item No. :
KLM-ZHD2240H/L226/8W
Size : L226*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO
LEDs : Osram
Voltage : DC24V
Power : 8W (5W+3x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°

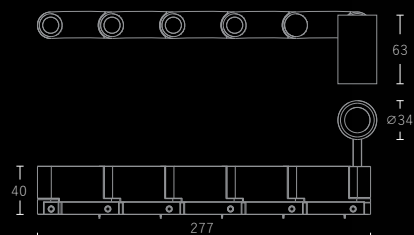

Item No. : KLM-ZHD2240H/L277/9W
Size : L277*W22*H40mm
Material : 6063 Aluminum
Body color : Sand BK/WH
IP Rate : IP20
Dimmable : NO DIM
LEDs : Osram
Voltage : DC24V
Power : 9W (5W+4x1W /LED
CCT : 2700K/3000K/4000K
CRI : ≥ 90
Beam angle : 15° /24° /38°

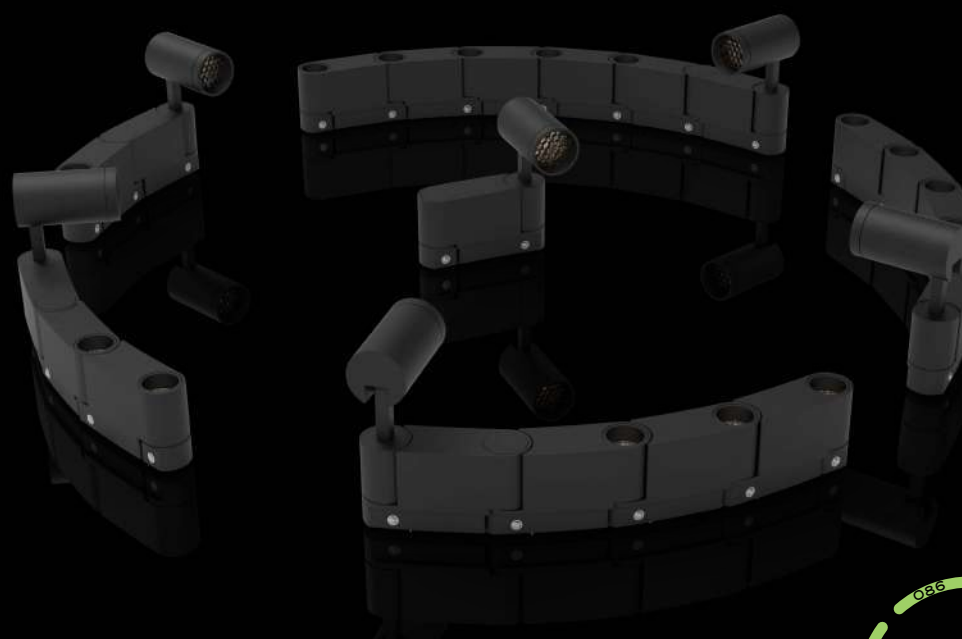


A 弧形组合平面线性灯
Arc combination
linear lamp



Free adjustable

22MM Curcy Magnetic

KLM Lighting

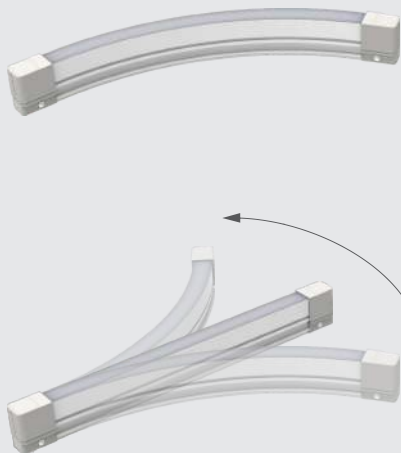

Can be bent s deways, not frontal

Item No. :
KLM-PMD2240H/L340/3W
Size: W22*H40*L340mm
Material: Top quality Silicone
Body color: Sand White
IP Rate: IP20
Dimmable: NO DIM
LEDs: Osram
Voltage: DC24V
Power: 3W
CCT: 2700K/3000K/4000K
CRI : ≥ 90
Beam angle: 100°




Sizemm



IES

Beam angle	100°
	105.20 lm


h(m)	E0°(lx)	ø(m)
1.50	13.71	4.82
2.25	6.09	7.23
3.50	2.52	11.25
4.00	1.93	12.86

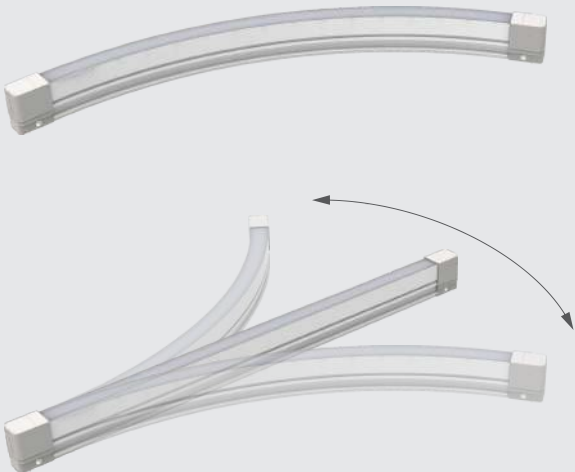

Can be bent s deways, not frontal

Item No. :
KLM-PMD2240H/L518/5W
Size: W22*H40*L518mm
Material: Top quality Silicone
Body color: Sand White
IP Rate: IP20
Dimmable: NO DIM
LEDs: Osram
Voltage: DC24V
Power: 5W
CCT: 2700K/3000K/4000K
CRI : ≥ 90
Beam angle: 100°



Sizemm



IES


Beam angle	100°
	152.0 lm

h(m)	E0°(lx)	ø(m)
1.50	23.19	3.67
2.25	10.31	5.51
3.50	4.26	8.57
4.00	3.26	9.79



22MM Curcy Magnetic

KLM Lighting

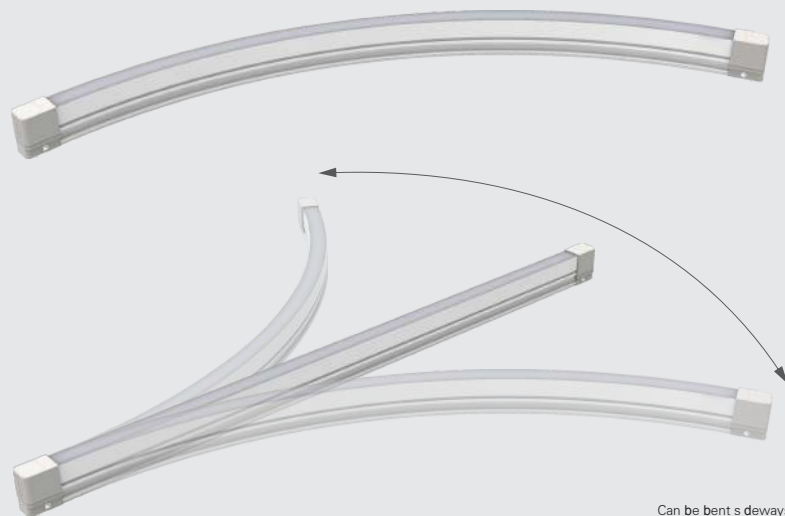

Can be bent sideways, not frontal

Item No. :

KLM-PMD2240H/L730/7W
Size: W22*H40*L730MM
Materials: High quality silicon
Body color: Sand White/Black
IP Rate: IP20
NO DIM LEDs: Osram
Voltage: DC24V
Power: 7W
CCT : 2700K/3000K/4000K

IES

Beam angle 100°


105.20 lm

h(m)	E0'(lx)	ø(m)
1.50	13.71	4.82
2.25	6.09	7.23
3.50	2.52	11.25
4.00	1.93	12.86

(cd

CU/C180:

CU/C270:



Beam angle: 100°



