


# Gypsum Series

Magnetic Lighting System


Gypsum Magnetic Series

Perfectly solve the problem of batch ash cracking / falling off.


- 1. Effectively solve the cracking phenomenon of magnetic attraction track and ceiling;
- 2. Perfectly solve the problem of ash falling from magnetic track and ceiling;
- 3. Fully integrated with the ceiling finish;
- 4. The magnetic attraction track and the ceiling finish surface are flatters;
- 5. The white magnetic track is combined with the white magnetic lamp;

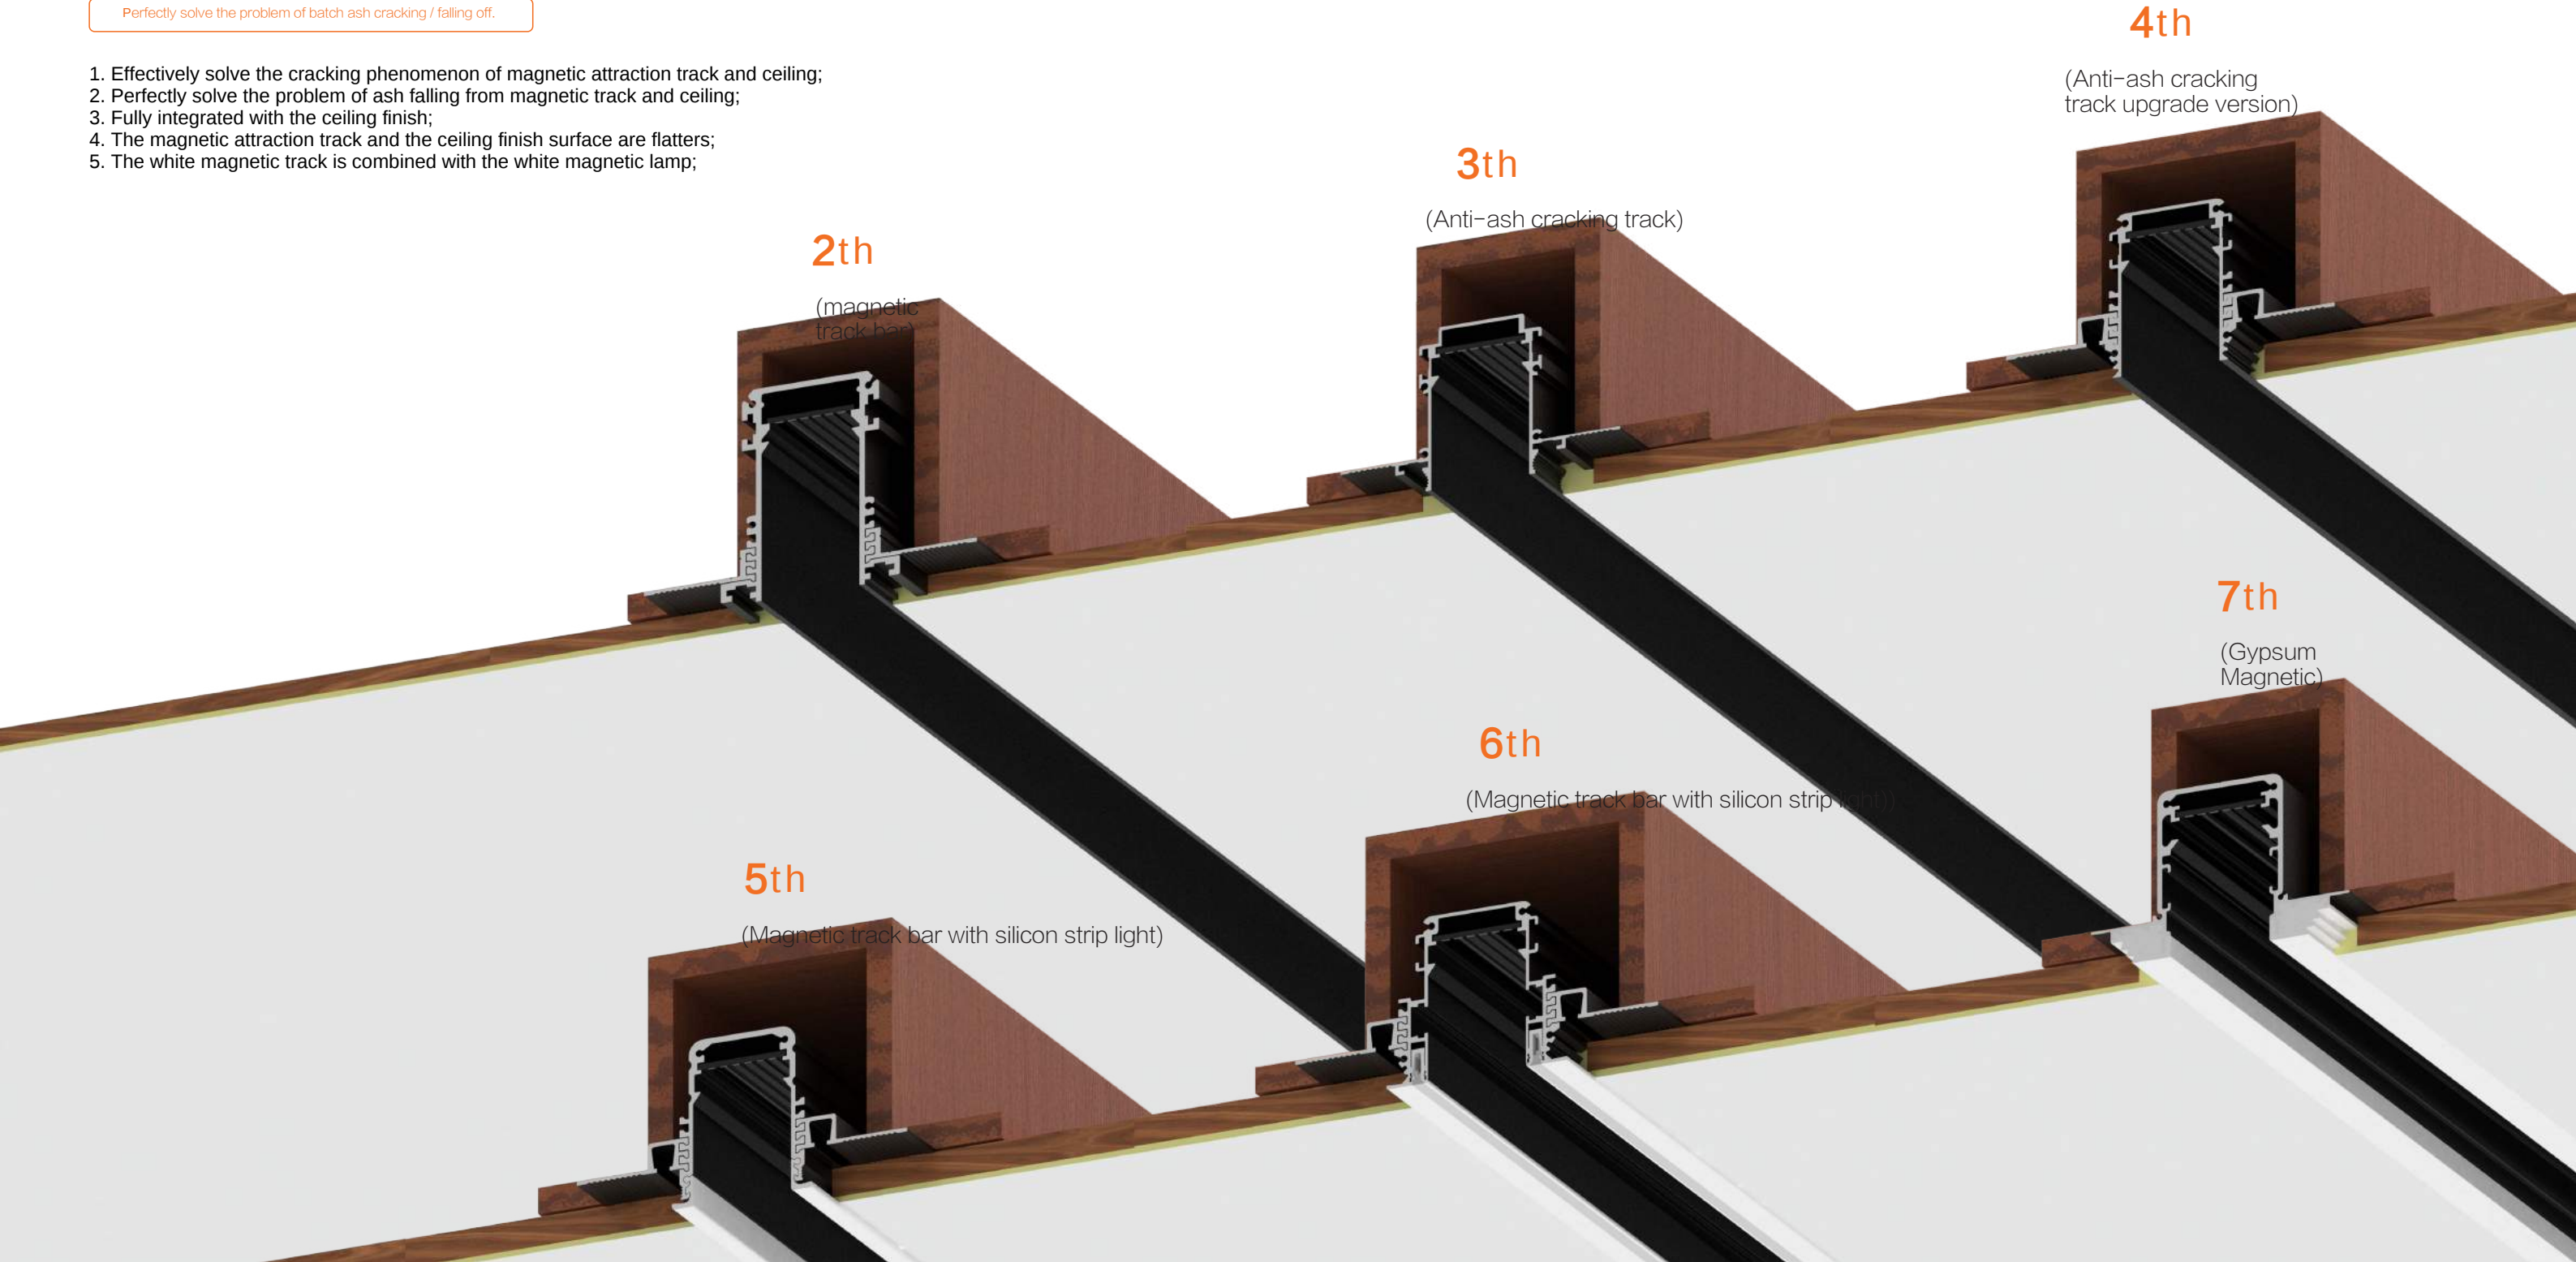

## Gypsum Magnetic Series

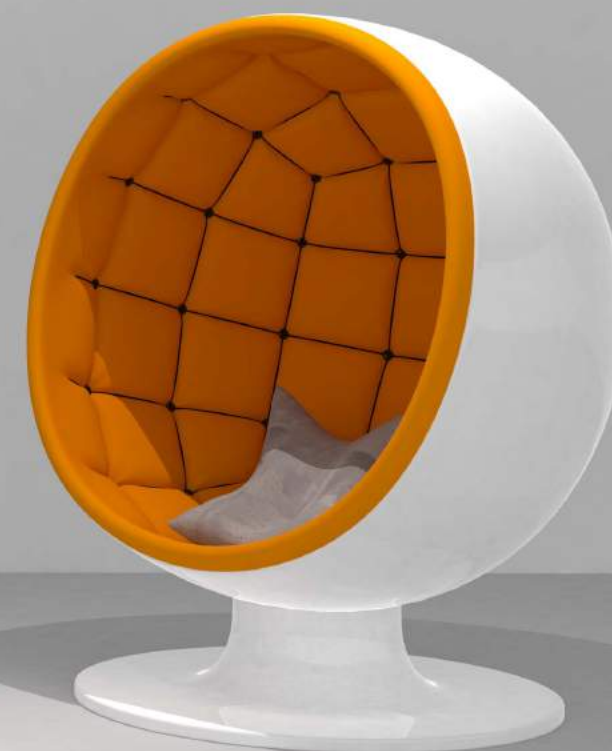

14mm professional gypsum magnetic

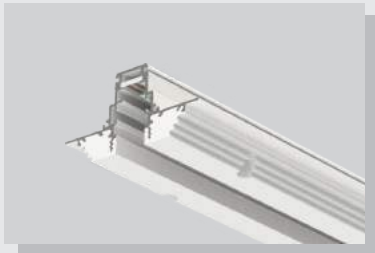


KLM-GD7237Y  
Cut hole: W35\*H40mm

22mm professional gypsum magnetic




KLM-GD8075Y  
Cut hole: W40\*H85mm

21mm standard gypsum magnetic

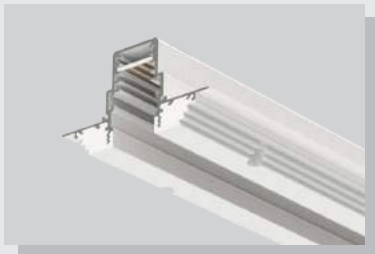


KLM-GD7943Y  
Cut hole: W40\*H45mm

21mm professional gypsum magnetic

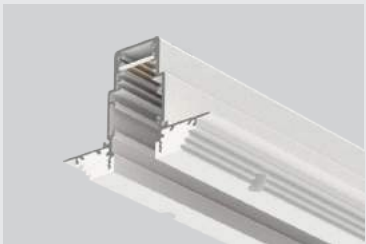


KLM-GD7955Y  
Cut hole: W40\*H60mm

34mm standard embedded

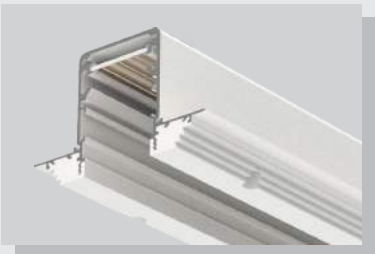


KLM-GD9258Y  
Cut hole: W55\*H75mm


22mm standard gypsum magnetic

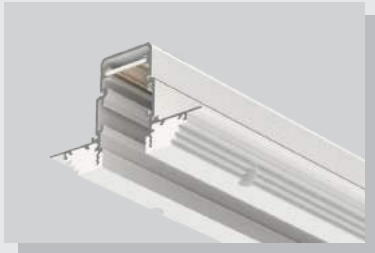

KLM-GD8250Y  
Cut hole: W40\*H60mm

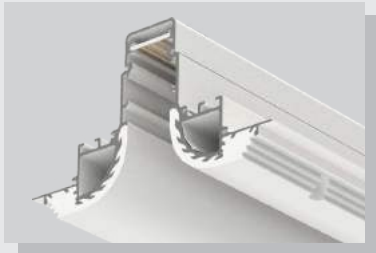

KLM-GD13075Y/H  
Cut hole: W90\*H85mm

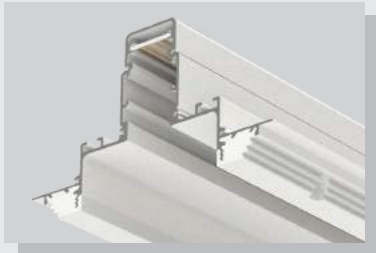

KLM-GD13075Y/F  
Cut hole: W85\*H85mm



KLM-GD9258Y



KLM-GD9258Y




GYPSUM Series





# 14mm<sup>2</sup>wire



## Professional Gypsum Series

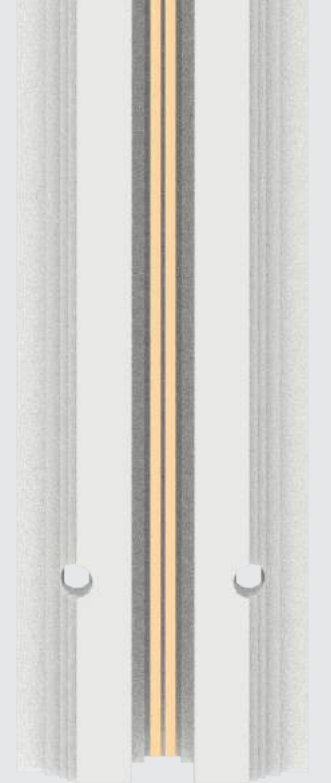

# Professional

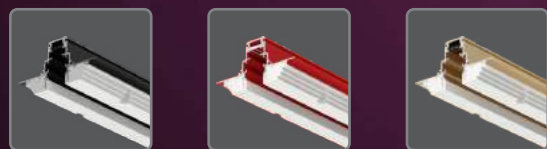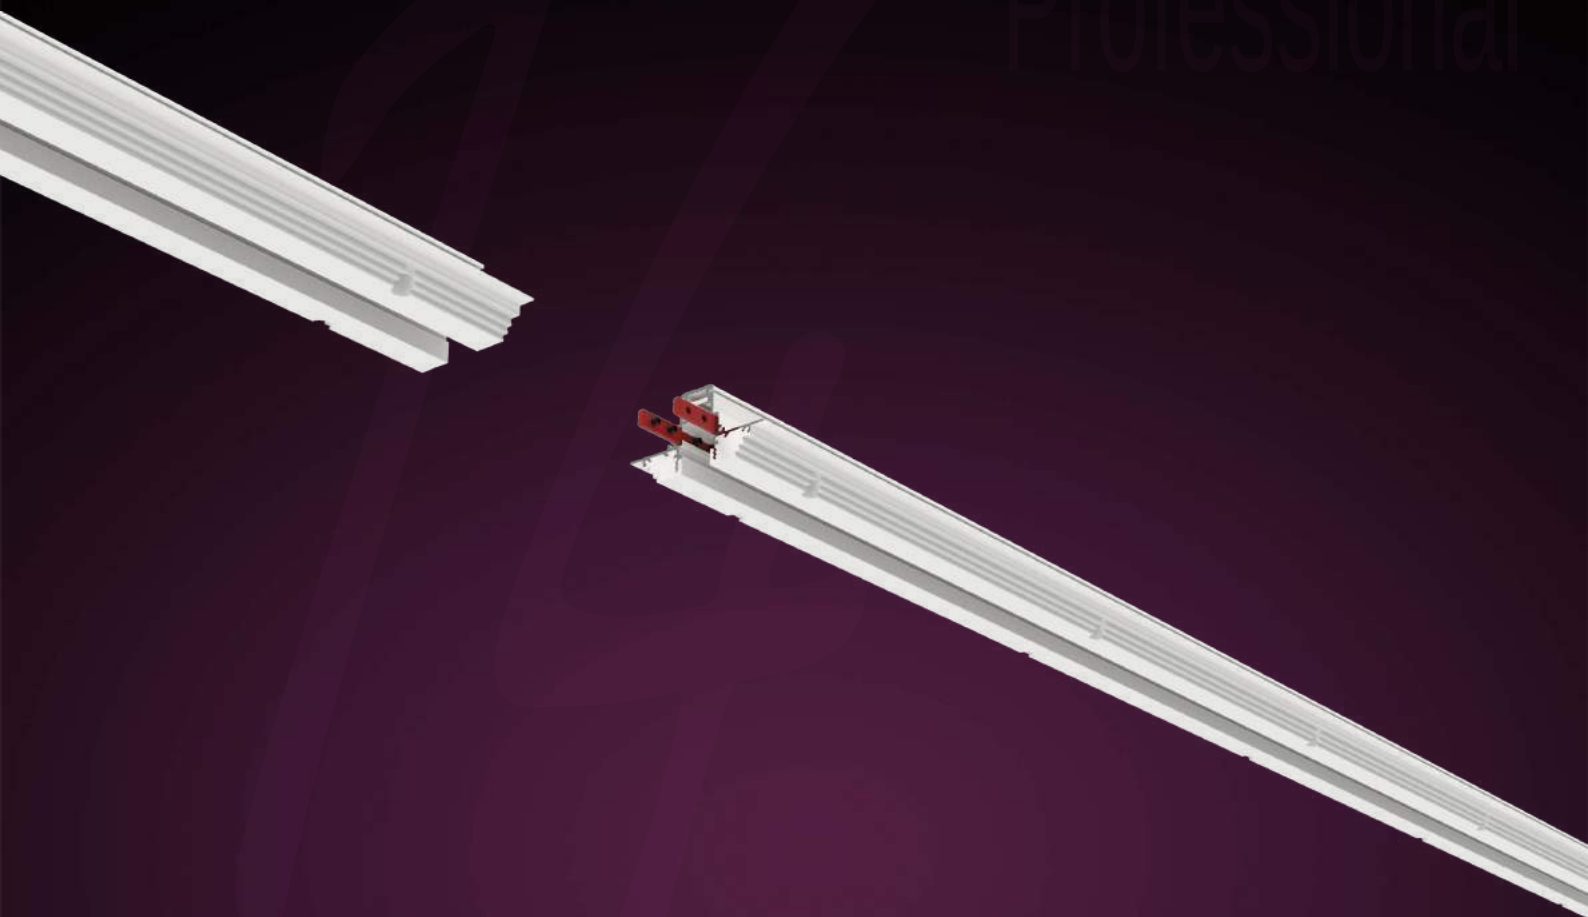

Item No.: KLM-GD7237Y/L1000  
 Installation: Recessed  
 Size: W72\*H37mm  
 L1000/1500/2000mm  
 Control mode: single group control  
 6063 Aluminum  
 Color: B/W/R/G  
 IP20  
 Cut hole: W35\*H40mm  
 Ceiling Thickness: 9mm

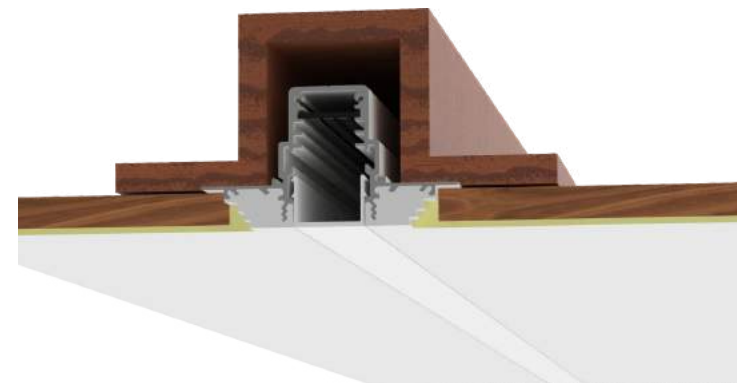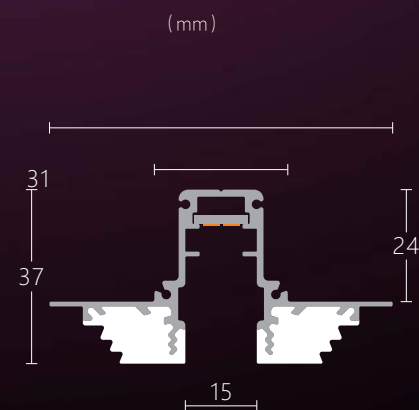

The original gypsum track perfectly solves the problem of batch ash cracking/falling off; it also achieves an endless finish surface and integrates with the ceiling.



KLM-GD7237Y/L150P  
 Cut hole:  
 L(160\*160)\*W35\*H40mm








KLM-GD7237Y/L150N  
 Cut hole:  
 L(133\*133)\*W35\*H40mm



KLM-GD7237Y/L150T  
 Cut hole:  
 L(300\*140)\*W35\*H40mm



KLM-GD7237Y/L300S  
 Cut hole:  
 L(300\*300)\*W35\*H40mm





Spotlight



|                  |            |                   |    |     |               |  |
|------------------|------------|-------------------|----|-----|---------------|--|
| KLM-SD142265/3W  | Ø22*L65mm  | Osram             | 3W | ≥90 | 15° /24°      |  |
| KLM-SD143463/5W  | Ø34*L63mm  | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° |  |
| KLM-SD1434100/8W | Ø34*L100mm | Honourtek/Luminus | 8W | ≥90 | 15° /24° /38° |  |

Pendant Light



|                   |            |                   |    |     |               |  |
|-------------------|------------|-------------------|----|-----|---------------|--|
| KLM-DXD1434200/5W | Ø34*L200mm | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° |  |
|-------------------|------------|-------------------|----|-----|---------------|--|

180° Adjustable  
Linear Light



|                      |                |       |    |     |     |    |
|----------------------|----------------|-------|----|-----|-----|----|
| KLM-GSD1469/L151/T5W | L151*W14*H69mm | Osram | 5W | ≥90 | 30° | NO |
| KLM-GSD1469/L223/T7W | L223*W14*H69mm | Osram | 7W | ≥90 | 30° | NO |

Linear Light



|                       |                 |       |     |     |     |    |
|-----------------------|-----------------|-------|-----|-----|-----|----|
| KLM-GSD1430/L151/5W   | L151*W14*H30mm  | Osram | 5W  | ≥90 | 30° | NO |
| KLM-GSD1430/L295/10W  | L295*W14*H30mm  | Osram | 10W | ≥90 | 30° | NO |
| KLM-GSD1430/L512/10W  | L512*W14*H30mm  | Osram | 17W | ≥90 | 30° | NO |
| KLM-GSD1430/L1018/10W | L1018*W14*H30mm | Osram | 32W | ≥90 | 30° | NO |

180° Adjustable  
PC linear light



|                      |                |       |    |     |      |    |
|----------------------|----------------|-------|----|-----|------|----|
| KLM-PMD1469/L151/T5W | L151*W14*H69mm | Osram | 5W | ≥90 | 100° | NO |
| KLM-PMD1469/L223/T7W | L223*W14*H69mm | Osram | 7W | ≥90 | 100° | NO |



PC linear light




|                       |                 |       |     |     |      |    |
|-----------------------|-----------------|-------|-----|-----|------|----|
| KLM-PMD1430/L151/5W   | L151*W14*H30mm  | Osram | 5W  | ≥90 | 100° | NO |
| KLM-PMD1430/L295/10W  | L295*W14*H30mm  | Osram | 10W | ≥90 | 100° | NO |
| KLM-PMD1430/L512/10W  | L512*W14*H30mm  | Osram | 17W | ≥90 | 100° | NO |
| KLM-PMD1430/L1018/10W | L1018*W14*H30mm | Osram | 32W | ≥90 | 100° | NO |





Gypsum track  
After installation, only the light is visible,  
The track slot is almost integrated with the ceiling


series

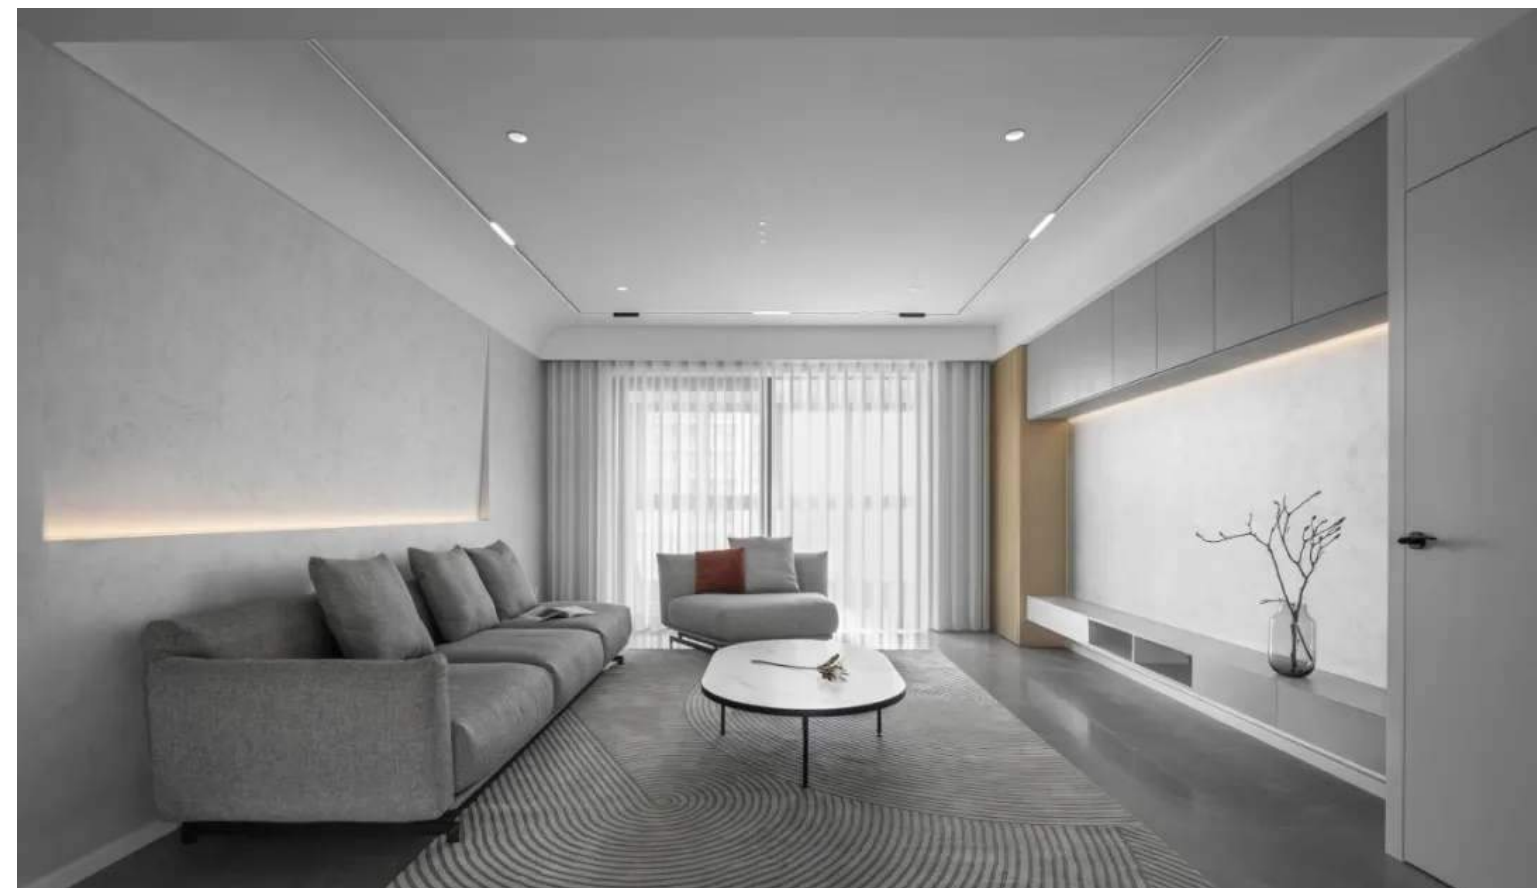

## SEAMLESS



Item No.: KLM-GD7237Y/L 1000  
Cut hole: W35\*H40mm

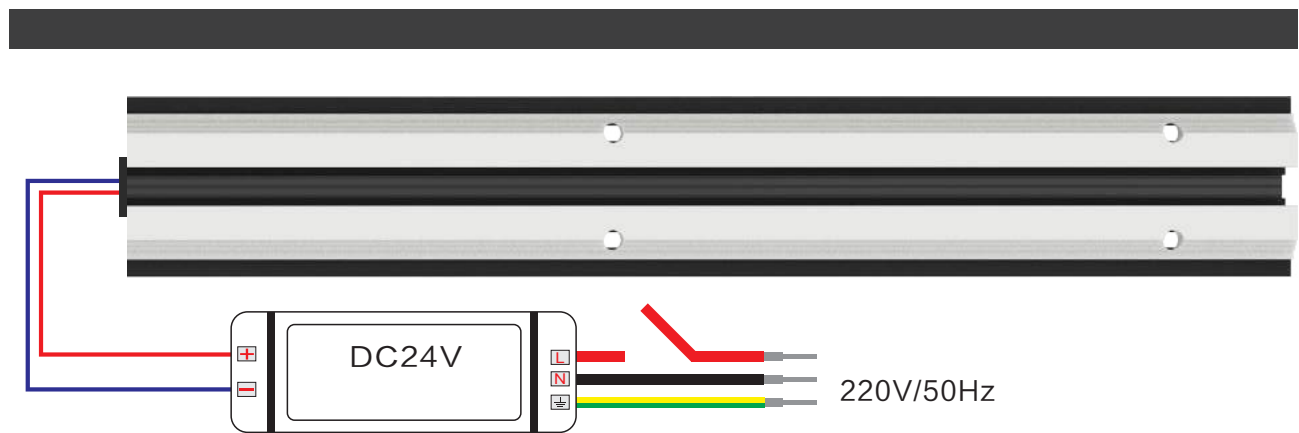


### Remark:

- 1. All system with DC24V, when connect with power supply, power better more than lamps watts 20%+
- 2. Magnetic track bar can not more than 5m, 5M power a group of individual breakouts, suggest 3m/system




## Installation

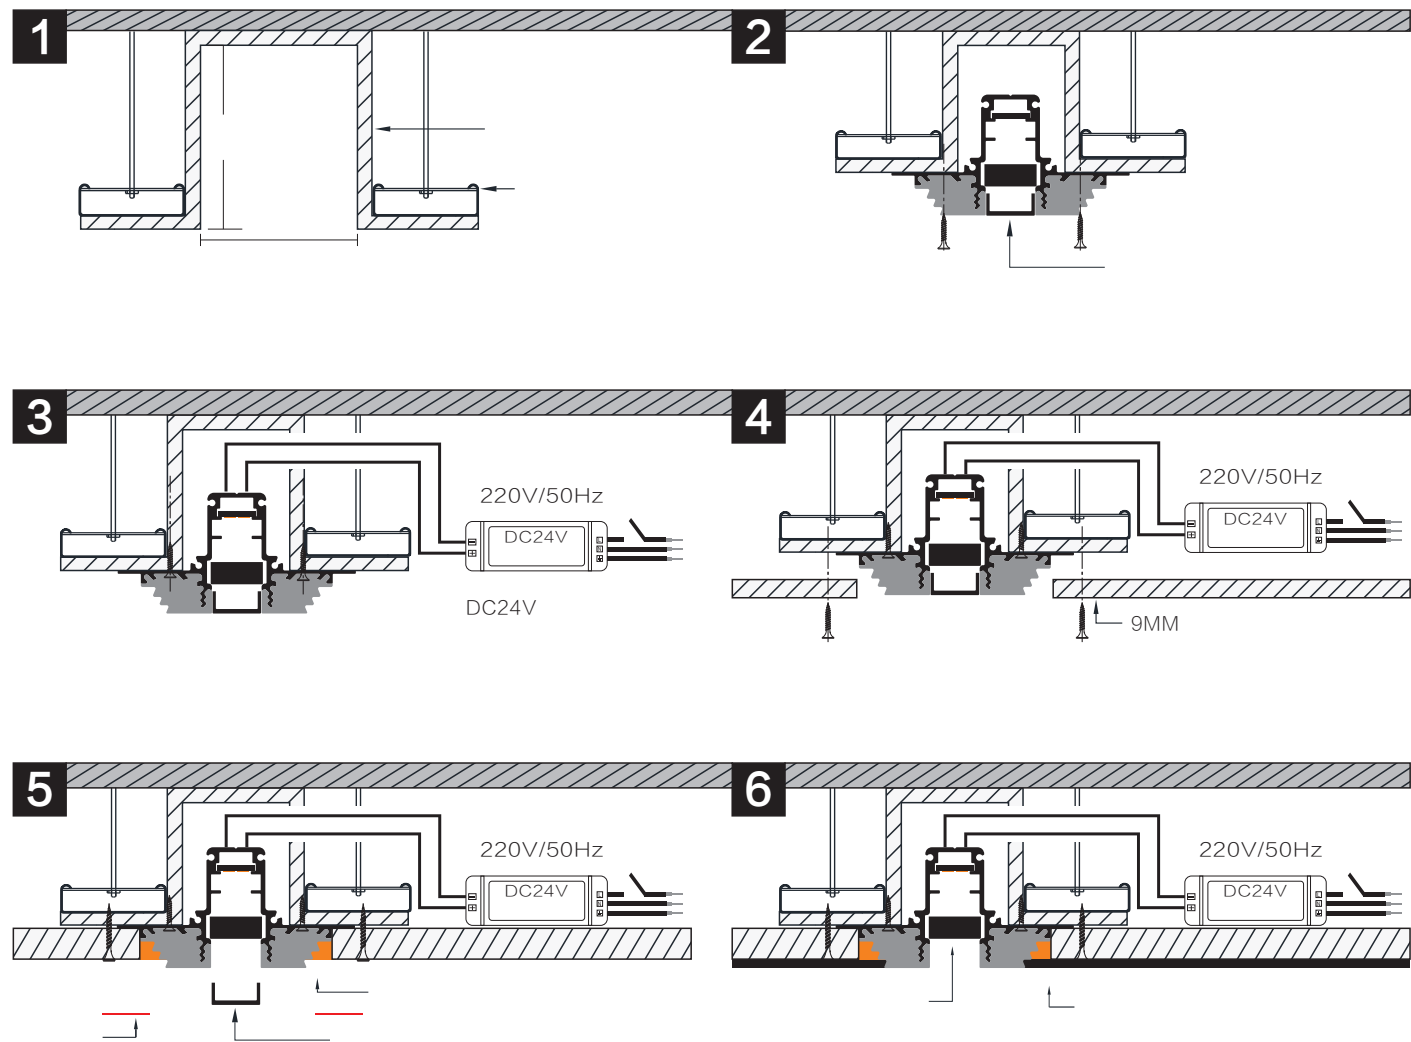






DC24V safe voltage

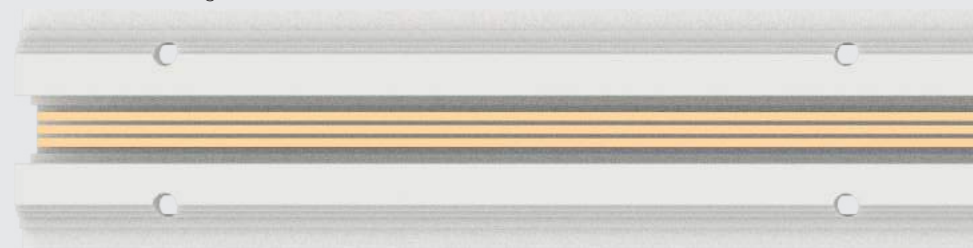

21 mm 3wire  
Gypsum Magnetic Series

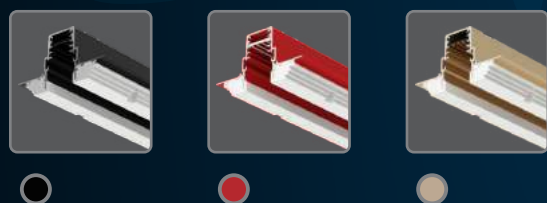

Item No.: KLM-GD7943Y/L1000  
Installation: Recessed  
Size: W79\*H43mm  
L1000/1500/2000mm  
Control mode: single group control/double group control  
6063 Aluminum  
Color: B/W/R/G  
IP20  
Cut hole: W40\*H45mm  
Ceiling Thickness: 9mm

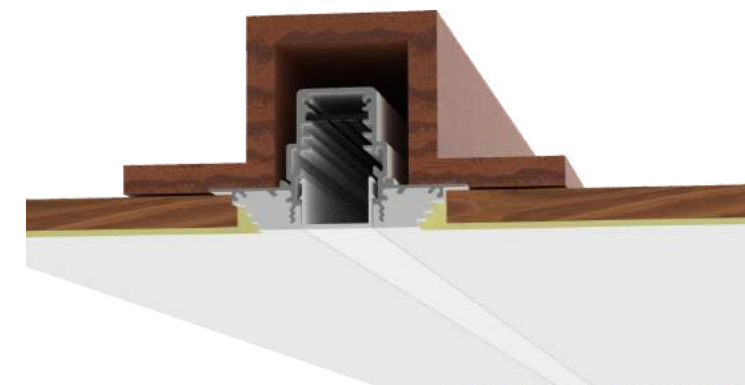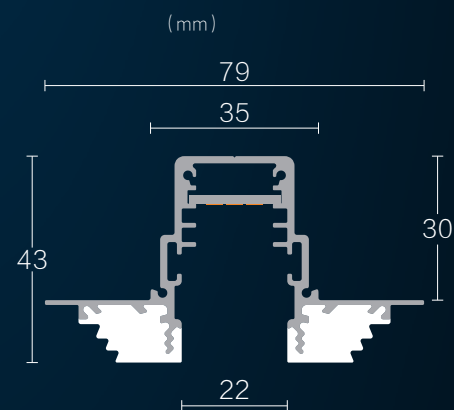

The original gypsum track perfectly solves the problem of batch ash cracking/falling off; it also achieves an endless finish surface and integrates with the ceiling.



KLM-GD7943Y/L150P  
Cut hole:  
L(160\*160)\*W40\*H45mm











KLM-GD7943Y/L150N  
Cut hole:  
L(130\*130)\*W40\*H45mm



KLM-GD7943Y/L150T  
Cut hole:  
L(300\*124)\*W40\*H45mm



KLM-GD7943Y/L300S  
Cut hole:  
L(300\*300)\*W40\*H45mm



21mm

Spot Light



|                  |            |                   |    |     |               |     |
|------------------|------------|-------------------|----|-----|---------------|-----|
| KLM-SD212265/3W  | ø22*L65mm  | Osram             | 3W | ≥90 | 15° /24°      | DIM |
| KLM-SD213463/5W  | ø34*L63mm  | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° | DIM |
| KLM-SD2134100/8W | ø34*L100mm | Honourtek/Luminus | 8W | ≥90 | 15° /24° /38° | DIM |

Pendant Light



|                   |            |                   |    |     |               |     |
|-------------------|------------|-------------------|----|-----|---------------|-----|
| KLM-DXD2134200/5W | ø34*L200mm | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° | DIM |
|-------------------|------------|-------------------|----|-----|---------------|-----|

180° Adjustable Linear Light



|                      |                |       |    |     |     |     |
|----------------------|----------------|-------|----|-----|-----|-----|
| KLM-GSD2181/L222/T7W | L222*W21*H81mm | Osram | 7W | ≥90 | 25° | DIM |
|----------------------|----------------|-------|----|-----|-----|-----|

Linear Light



|                      |                |       |     |     |     |     |
|----------------------|----------------|-------|-----|-----|-----|-----|
| KLM-GSD2132/L222/7W  | L222*W21*H32mm | Osram | 7W  | ≥90 | 25° | DIM |
| KLM-GSD2132/L328/11W | L328*W21*H32mm | Osram | 11W | ≥90 | 25° | DIM |

180° Adjustable  
PC linear light



|                      |                |       |    |     |      |     |
|----------------------|----------------|-------|----|-----|------|-----|
| KLM-PMD2181/L243/T8W | L243*W21*H81mm | Osram | 8W | ≥90 | 100° | DIM |
|----------------------|----------------|-------|----|-----|------|-----|

21mm

PC linear light



|                      |                |       |     |     |      |     |
|----------------------|----------------|-------|-----|-----|------|-----|
| KLM-PMD2132/L243/8W  | L243*W21*H32mm | Osram | 8W  | ≥90 | 100° | DIM |
| KLM-PMD2132/L485/16W | L485*W21*H32mm | Osram | 16W | ≥90 | 100° | DIM |
| KLM-PMD2132/L965/32W | L965*W21*H32mm | Osram | 32W | ≥90 | 100° | DIM |

3 Type linear light





|                      |                |       |     |     |      |     |
|----------------------|----------------|-------|-----|-----|------|-----|
| KLM-SMD2139/L485/16W | L485*W21*H39mm | Osram | 16W | ≥90 | 120° | DIM |
| KLM-SMD2139/L965/30W | L965*W21*H39mm | Osram | 30W | ≥90 | 120° | DIM |





Item No.: KLM-GD7955Y/L1000  
Installation: Recessed  
Size: W79\*H55mm  
L1000/1500/2000mm  
Control mode: single group  
control/double group control  
6063 Aluminum  
Color: B/W/R/G  
Cut hole: W40\*H60mm  
Ceiling Thickness: 9mm

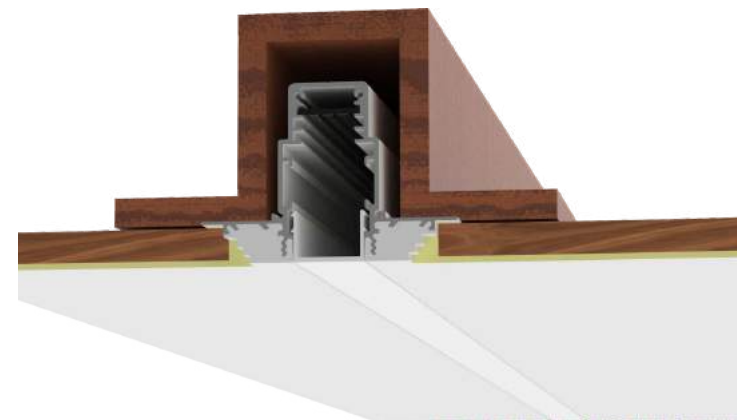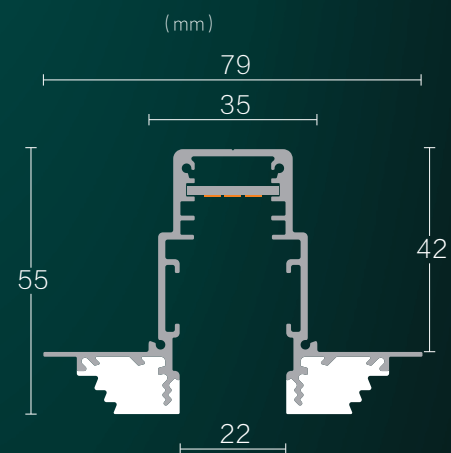

The original gypsum track perfectly solves the problem of batch ash cracking/falling off; it also achieves an endless finish surface and integrates with the ceiling.



KLM-GD7955Y/L150P  
Cut hole:  
L(160\*160)\*W40\*H60mm






KLM-GD7955Y/L150N  
Cut hole:  
L(117\*117)\*W40\*H60mm



KLM-GD7955Y/L150T  
Cut hole:  
L(300\*140)\*W40\*H60mm



KLM-GD7955Y/L300S  
Cut hole:  
L(300\*300)\*W40\*H60mm



21mm professional type



|                  |            |                   |    |     |               |     |
|------------------|------------|-------------------|----|-----|---------------|-----|
| KLM-SD212265/3W  | ø22*L65mm  | Osram             | 3W | ≥90 | 15° /24°      | DIM |
| KLM-SD213463/5W  | ø34*L63mm  | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° | DIM |
| KLM-SD2134100/8W | ø34*L100mm | Honourtek/Luminus | 8W | ≥90 | 15° /24° /38° | DIM |



|                   |            |                   |    |     |               |     |
|-------------------|------------|-------------------|----|-----|---------------|-----|
| KLM-DXD2134200/5W | ø34*L200mm | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° | DIM |
|-------------------|------------|-------------------|----|-----|---------------|-----|

180° Adjustable Linear Light



|                        |                 |       |     |     |     |     |
|------------------------|-----------------|-------|-----|-----|-----|-----|
| KLM-GSD21106/L222/T10W | L222*W21*H106mm | Osram | 10W | ≥90 | 25° | DIM |
|------------------------|-----------------|-------|-----|-----|-----|-----|

Linear Light



|                       |                |       |     |     |     |     |
|-----------------------|----------------|-------|-----|-----|-----|-----|
| KLM-GSD2145/L222/T10W | L222*W21*H45mm | Osram | 10W | ≥90 | 25° | DIM |
| KLM-GSD2145/L328/T15W | L328*W21*H45mm | Osram | 15W | ≥90 | 25° | DIM |

180° Adjustable PC linear light



|                       |                 |       |    |     |      |     |
|-----------------------|-----------------|-------|----|-----|------|-----|
| KLM-PMD21106/L243/T8W | L243*W21*H106mm | Osram | 8W | ≥90 | 100° | DIM |
|-----------------------|-----------------|-------|----|-----|------|-----|

21mm professional type



|                      |                |       |     |     |      |     |
|----------------------|----------------|-------|-----|-----|------|-----|
| KLM-PMD2145/L243/8W  | L243*W21*H45mm | Osram | 8W  | ≥90 | 100° | DIM |
| KLM-PMD2145/L485/16W | L485*W21*H45mm | Osram | 16W | ≥90 | 100° | DIM |
| KLM-PMD2145/L965/30W | L965*W21*H45mm | Osram | 30W | ≥90 | 100° | DIM |



3 Type linear light



|                      |                |       |     |     |      |     |
|----------------------|----------------|-------|-----|-----|------|-----|
| KLM-SMD2152/L485/16W | L485*W21*H52mm | Osram | 16W | ≥90 | 120° | DIM |
| KLM-SMD2152/L965/30W | L965*W21*H52mm | Osram | 30W | ≥90 | 120° | DIM |



# Seamless

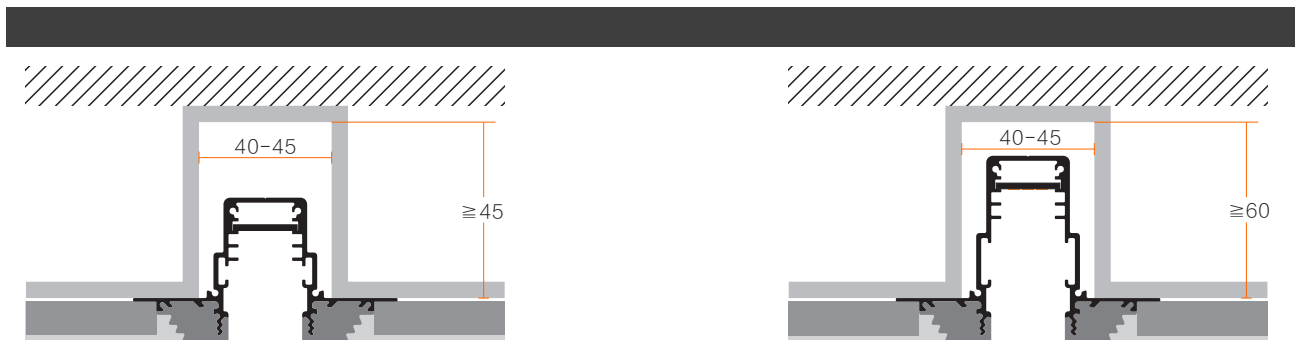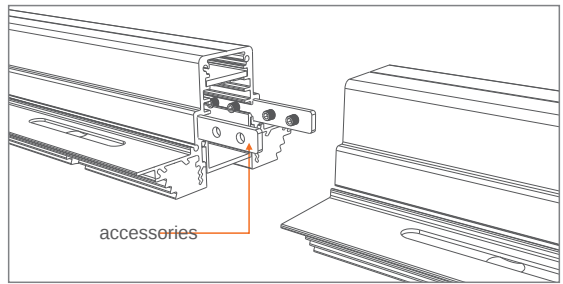


Item No.: KLM-GD7943Y/L1000开孔尺寸: W40\*H45mm


Item No.: KLM-GD7955Y/L1000开孔尺寸: W40\*H60mm



## Control all lamps together

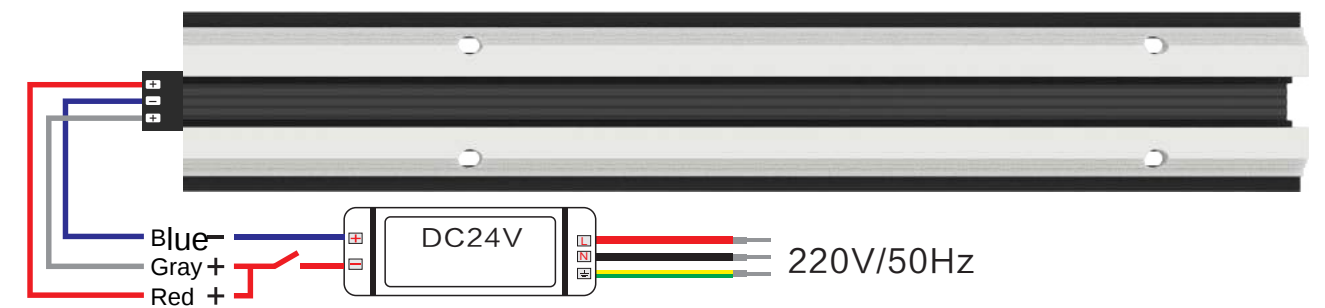

## Separated control all lamps

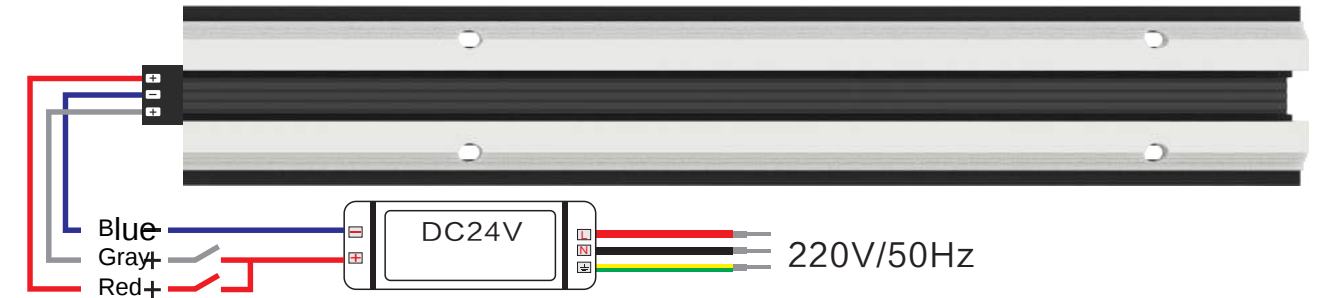



※Above connect info for NO DIM.

## Remark:

- 1. All system with DC24V , when connect with power supply , power better more than lamps watts 20%+
- 2. Magnetic track bar can not more than 5m,5M power a group of individual breakouts , suggest 3m/system


Installation

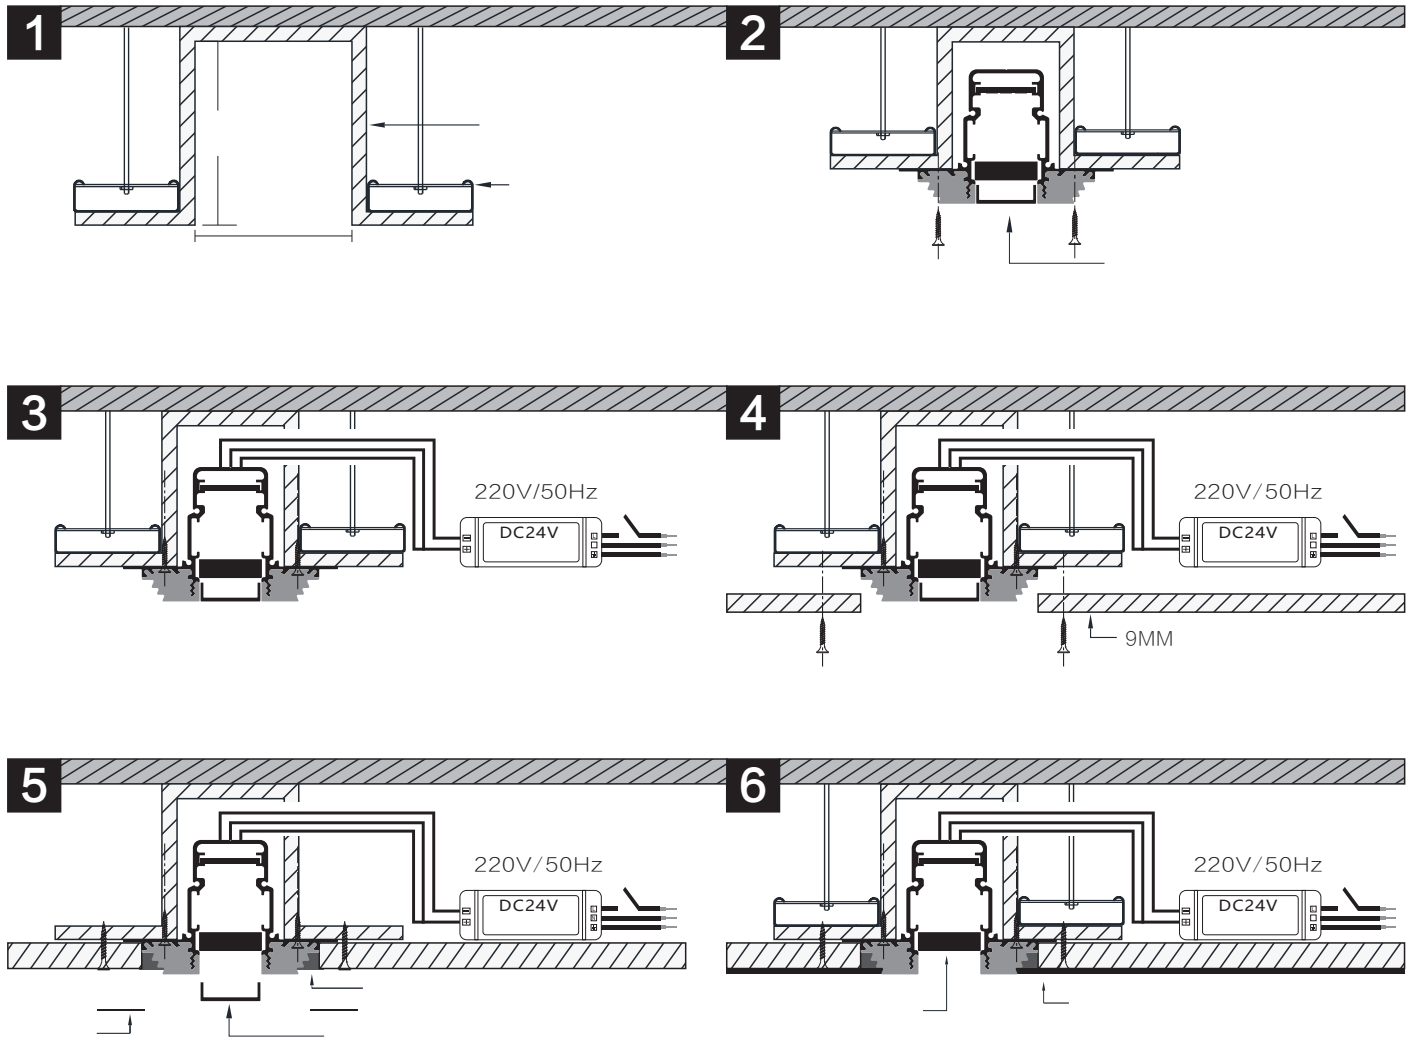

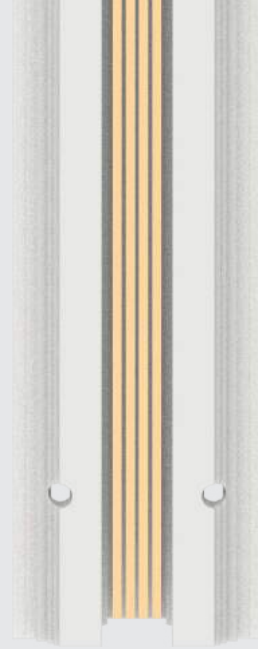

22 mm 4wire  
Gypsum Magnetic



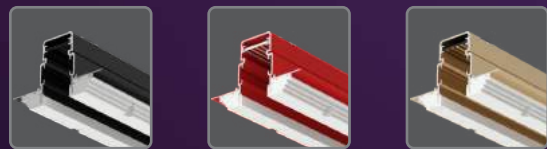

● 神秘黑    ● 中国红    ● 香槟金

Item No.: KLM-GD8250Y/L1000

Installation: Recessed

Size: W82\*H50mm  
L1000/1500/2000mm

Control mode: single-group control/three-group control



6063 Aluminum

Color: B/W/R/G

IP20

W40\*H60mm

Ceiling Thickness: 9mm

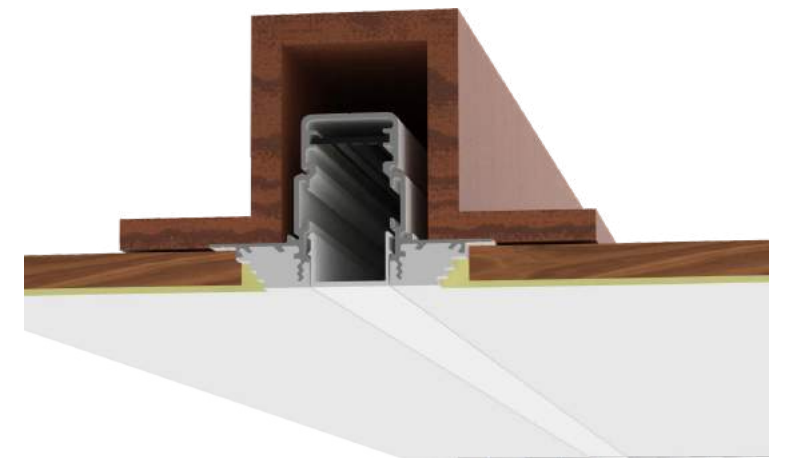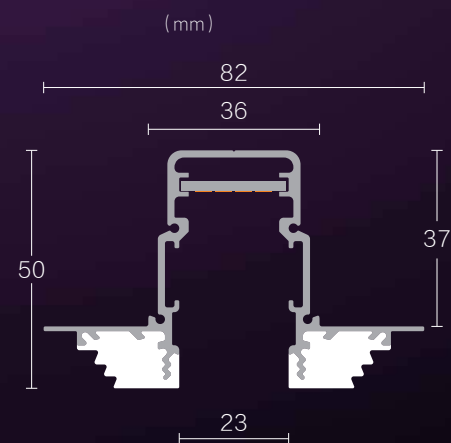

The original gypsum track perfectly solves the problem of batch ash cracking/falling off; it also achieves an endless finish surface and integrates with the ceiling.



KLM-GD8250Y/L150P  
Cut hole:  
L(159\*159)\*W40\*H60mm










KLM-GD8250Y/L150N  
Cut hole:  
L(122\*122)\*W40\*H60mm




KLM-GD8250Y/L150T  
Cut hole:  
L(300\*141)\*W40\*H60mm





KLM-GD8250Y/L300S  
Cut hole:  
L(300\*300)\*W40\*H60mm





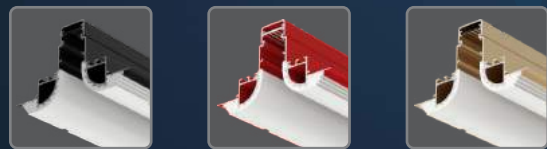

Item No.: KLM-GD13075Y/L1000/H  
 Installation: Recessed  
 Size: W130\*H75mm  
 L1000/1500/2000mm  
 Control mode: single-group  
 control/three-group control  
 6063 Aluminum  
 Color: B/W/R/G  
 IP20  
 Cut hole: W90\*H85mm  
 Ceiling Thickness: 9mm

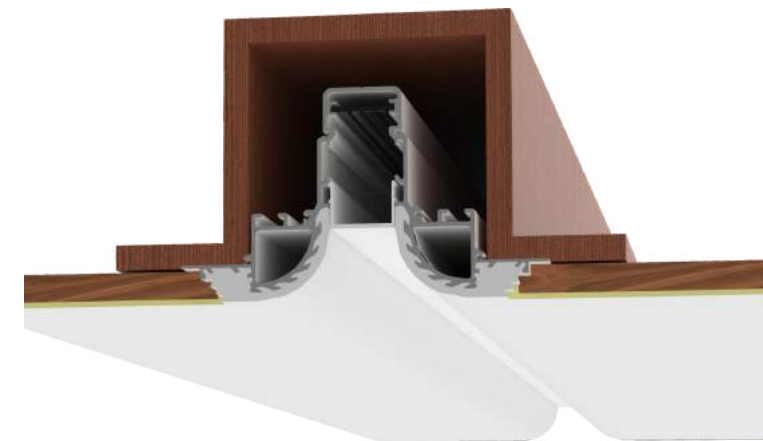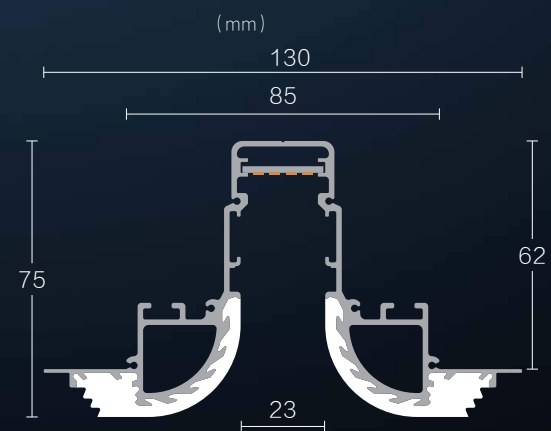

The original gypsum track perfectly solves the  
 problem of batch ash cracking/falling off; it also  
 achieves an endless finish surface and integrates  
 with the ceiling.




KLM-  
 GD13075Y/L150P/HCut  
 hole:  
 L(183\*183)\*W90\*H85mm






KLM-  
 GD13075Y/L150N/HCut  
 hole:  
 L(97\*97)\*W90\*H85mm




KLM-  
 GD13075Y/L150T/HCut  
 hole:  
 L(300\*117)\*W90\*H85mm





KLM-  
 GD13075Y/L300S/HCut  
 hole:  
 L(300\*300)\*W90\*H85mm



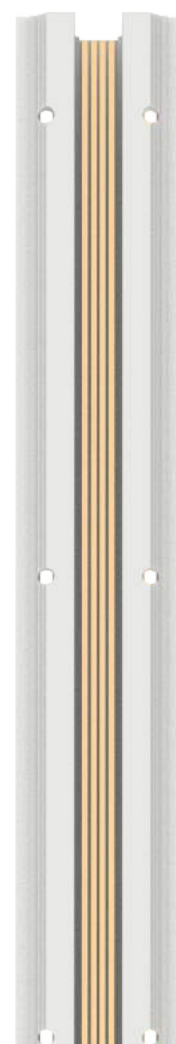



Item No.: KLM-GD13075Y/L1000/F  
Instalnation: Recessed  
Size: W130\*H75mm  
L1000/1500/2000mm  
Control mode: single-group  
control/three-group control  
6063 Aluminum  
Color: B/W/R/G  
IP20  
Cut hole: W85\*H85mm  
Ceiling Thickness: 9mm

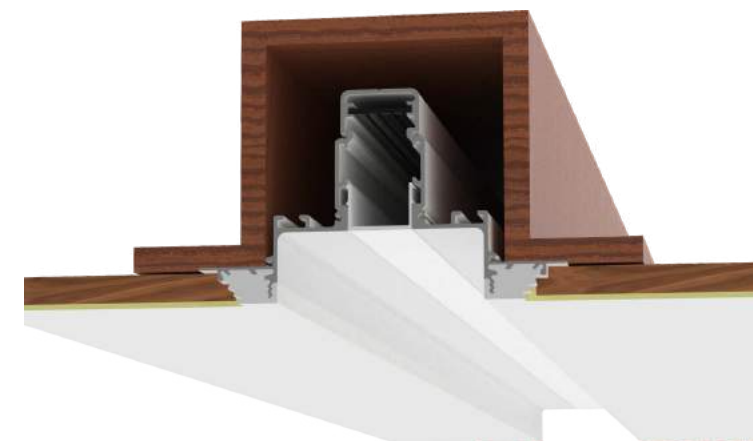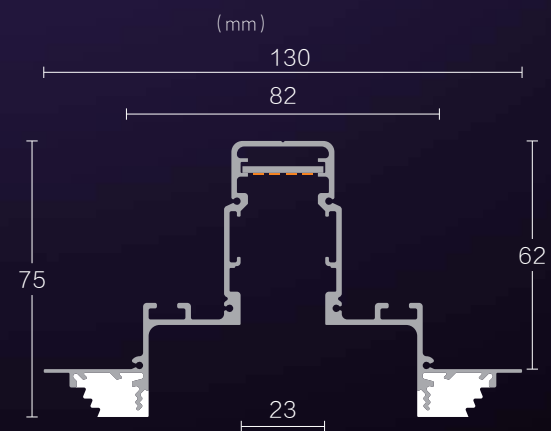

The original gypsum track perfectly solves the problem of batch ash cracking/falling off; it also achieves an endless finish surface and integrates with the ceiling.



KLM-GD13075Y/L150P/FCut  
hole:  
L(182\*182)\*W85\*H85mm











KLM-GD13075Y/L150N/FCut  
hole:  
L(97\*97)\*W85\*H85mm



KLM-GD13075Y/L150T/FCut  
hole:  
L(300\*120)\*W85\*H85mm





KLM-GD13075Y/L300S/FCut  
hole:  
L(300\*300)\*W85\*H85mm








Item No.: KLM-GD5068D/L1000  
 Installation: Suspended  
 Size: W50\*H68mm  
 L1000/1500/2000mm  
 Control mode: single-group control/three-group control  
 6063 Aluminum  
 Color: B/W/R/G  
 IP20

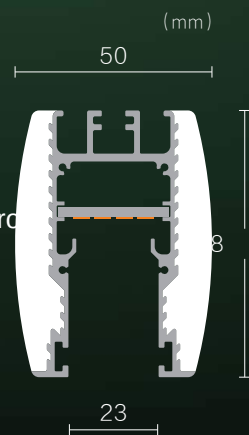

KLM-GD5068D/L150P  
 Cut hole:  
 L(160\*160)\*W50\*H68mm



KLM-GD5068D/L150N  
 Cut hole:  
 L(177\*177)\*W50\*H68mm





KLM-GD5068D/L150T  
 Cut hole:  
 L(300\*189)\*W50\*H68mm





KLM-GD5068D/L300S  
 Cut hole:  
 L(300\*300)\*W50\*H68mm





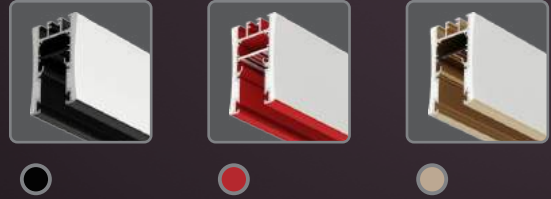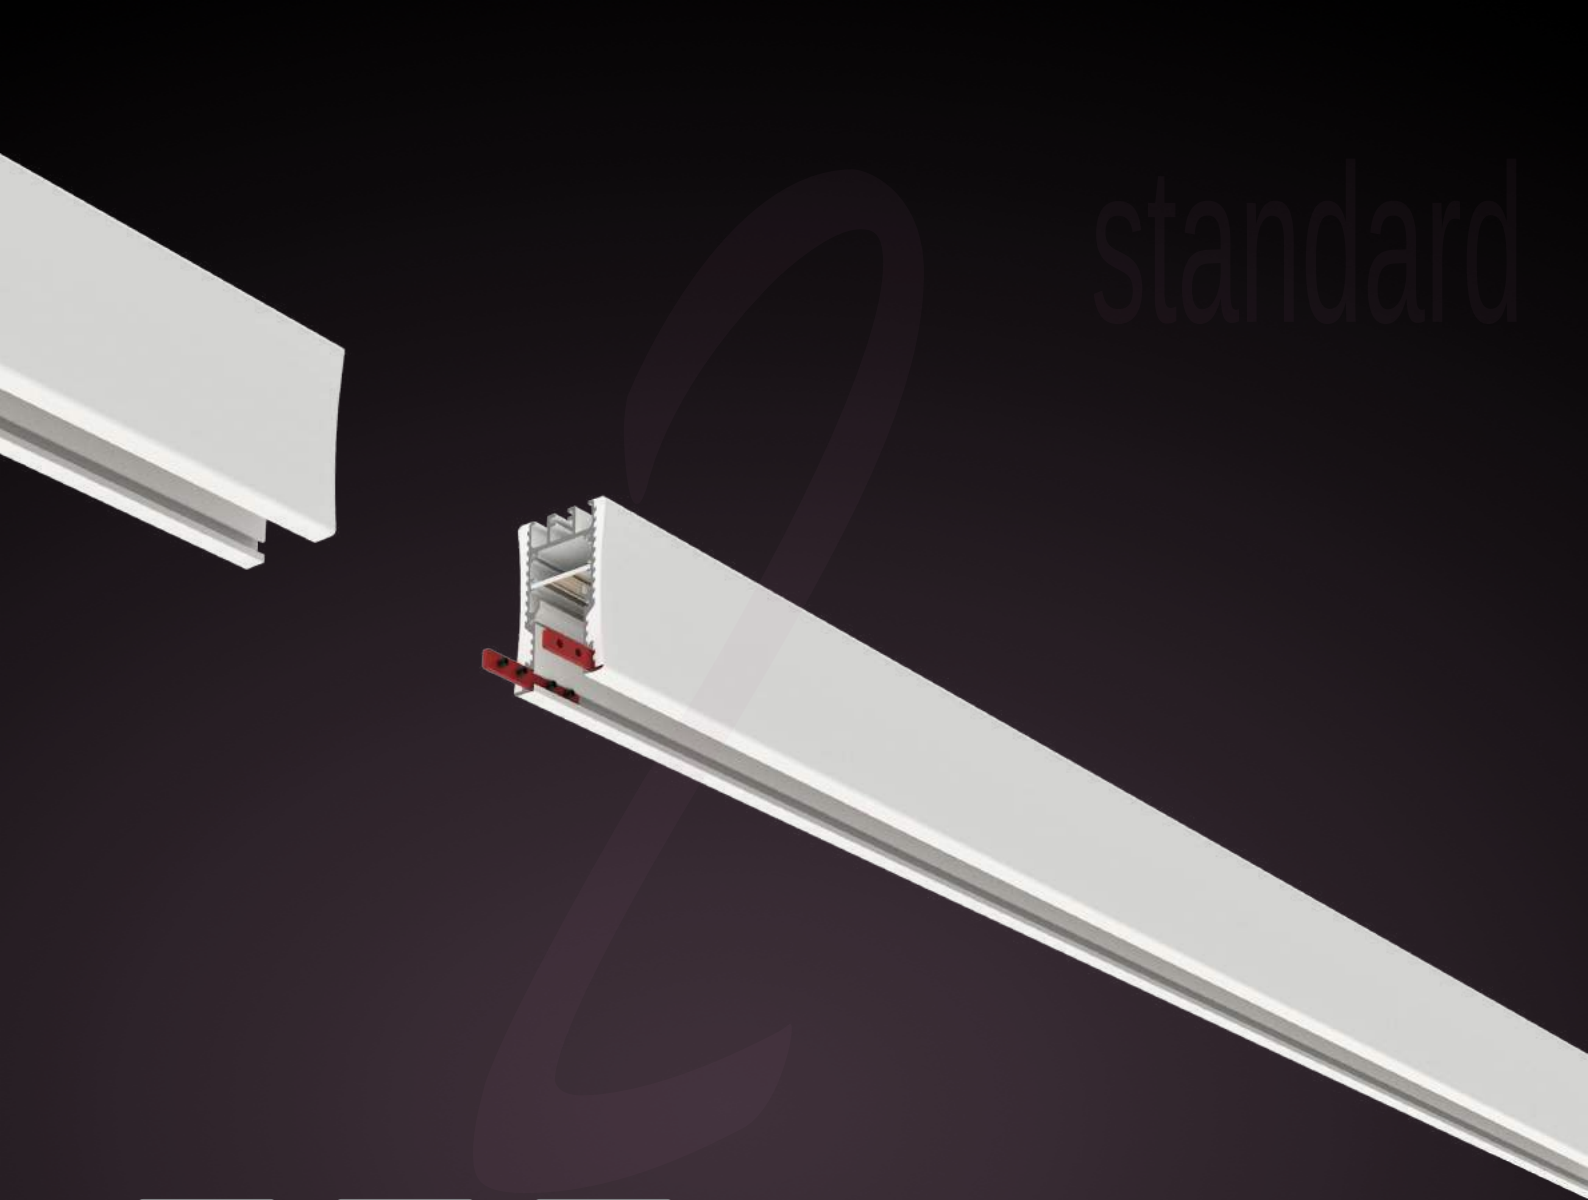

Item No.: KLM-GD4268D/L1000  
Installation: Suspended  
Size: W42\*H68mm  
L1000/1500/2000mm  
Control mode: single-group control/three-group control  
6063 Aluminum  
Color: B/W/R/G  
IP20

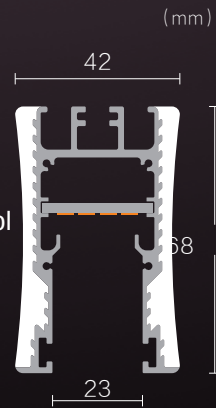


KLM-GD4268D/L150P  
Size:  
L(157\*157)\*W42\*H68mm





KLM-GD4268D/L150N  
Size:  
L(177\*177)\*W42\*H68mm



KLM-GD4268D/L150T  
Size:  
L(300\*185)\*W42\*H68mm



KLM-GD4268D/L300S  
Size:  
L(300\*300)\*W42\*H68mm



22mm Sandard Series



|                  |            |                   |    |     |               |     |
|------------------|------------|-------------------|----|-----|---------------|-----|
| KLM-SD2265/3W    | Ø22*L65mm  | Osram             | 3W | ≥90 | 15° /24°      | DIM |
| KLM-SD223463/5W  | Ø34*L63mm  | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° | DIM |
| KLM-SD2234100/8W | Ø34*L100mm | Honourtek/Luminus | 8W | ≥90 | 15° /24° /38° | DIM |

Pendant Light



|                   |            |                   |    |     |               |     |
|-------------------|------------|-------------------|----|-----|---------------|-----|
| KLM-DXD2234200/5W | Ø34*L200mm | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° | DIM |
|-------------------|------------|-------------------|----|-----|---------------|-----|

180° Adjustable  
Linear Light



|                          |                 |       |     |     |     |     |
|--------------------------|-----------------|-------|-----|-----|-----|-----|
| KLM-GSD22105/L220/T7W/G  | L220*W22*H105mm | Osram | 10W | ≥90 | 25° | DIM |
| KLM-GSD22130/L220/T12W/C | L220*W22*H130mm | Osram | 15W | ≥90 | 25° | DIM |

Linear Light



|                        |                |       |     |     |     |     |
|------------------------|----------------|-------|-----|-----|-----|-----|
| KLM-GSD2240/L220/7W/G  | L220*W22*H40mm | Osram | 7W  | ≥90 | 25° | DIM |
| KLM-GSD2240/L545/18W/G | L545*W22*H40mm | Osram | 18W | ≥90 | 25° | DIM |

180° Adjustable  
PC linear light



|                         |                 |       |    |     |      |     |
|-------------------------|-----------------|-------|----|-----|------|-----|
| KLM-PMD22130/L247/T8W/C | L243*W21*H130mm | Osram | 8W | ≥90 | 100° | DIM |
|-------------------------|-----------------|-------|----|-----|------|-----|

22mm Sandard Series






| Item No.               | Size           | LEDs  | Power | CRI | Beam a | DIM |
|------------------------|----------------|-------|-------|-----|--------|-----|
| KLM-PMD2240/L247/8W/G  | L247*W22*H40mm | Osram | 8W    | ≥90 | 100°   | DIM |
| KLM-PMD2240/L485/16W/G | L485*W22*H40mm | Osram | 16W   | ≥90 | 100°   | DIM |
| KLM-PMD2140/L965/30W/G | L965*W22*H40mm | Osram | 30W   | ≥90 | 100°   | DIM |

Wall Washer Linear light





| Item No.               | Size            | LEDs  | Power | CRI | Beam a | DIM |
|------------------------|-----------------|-------|-------|-----|--------|-----|
| KLM-XQD22100/L247/8W/G | L247*W22*H100mm | Osram | 8W    | ≥90 | 75°    | DIM |

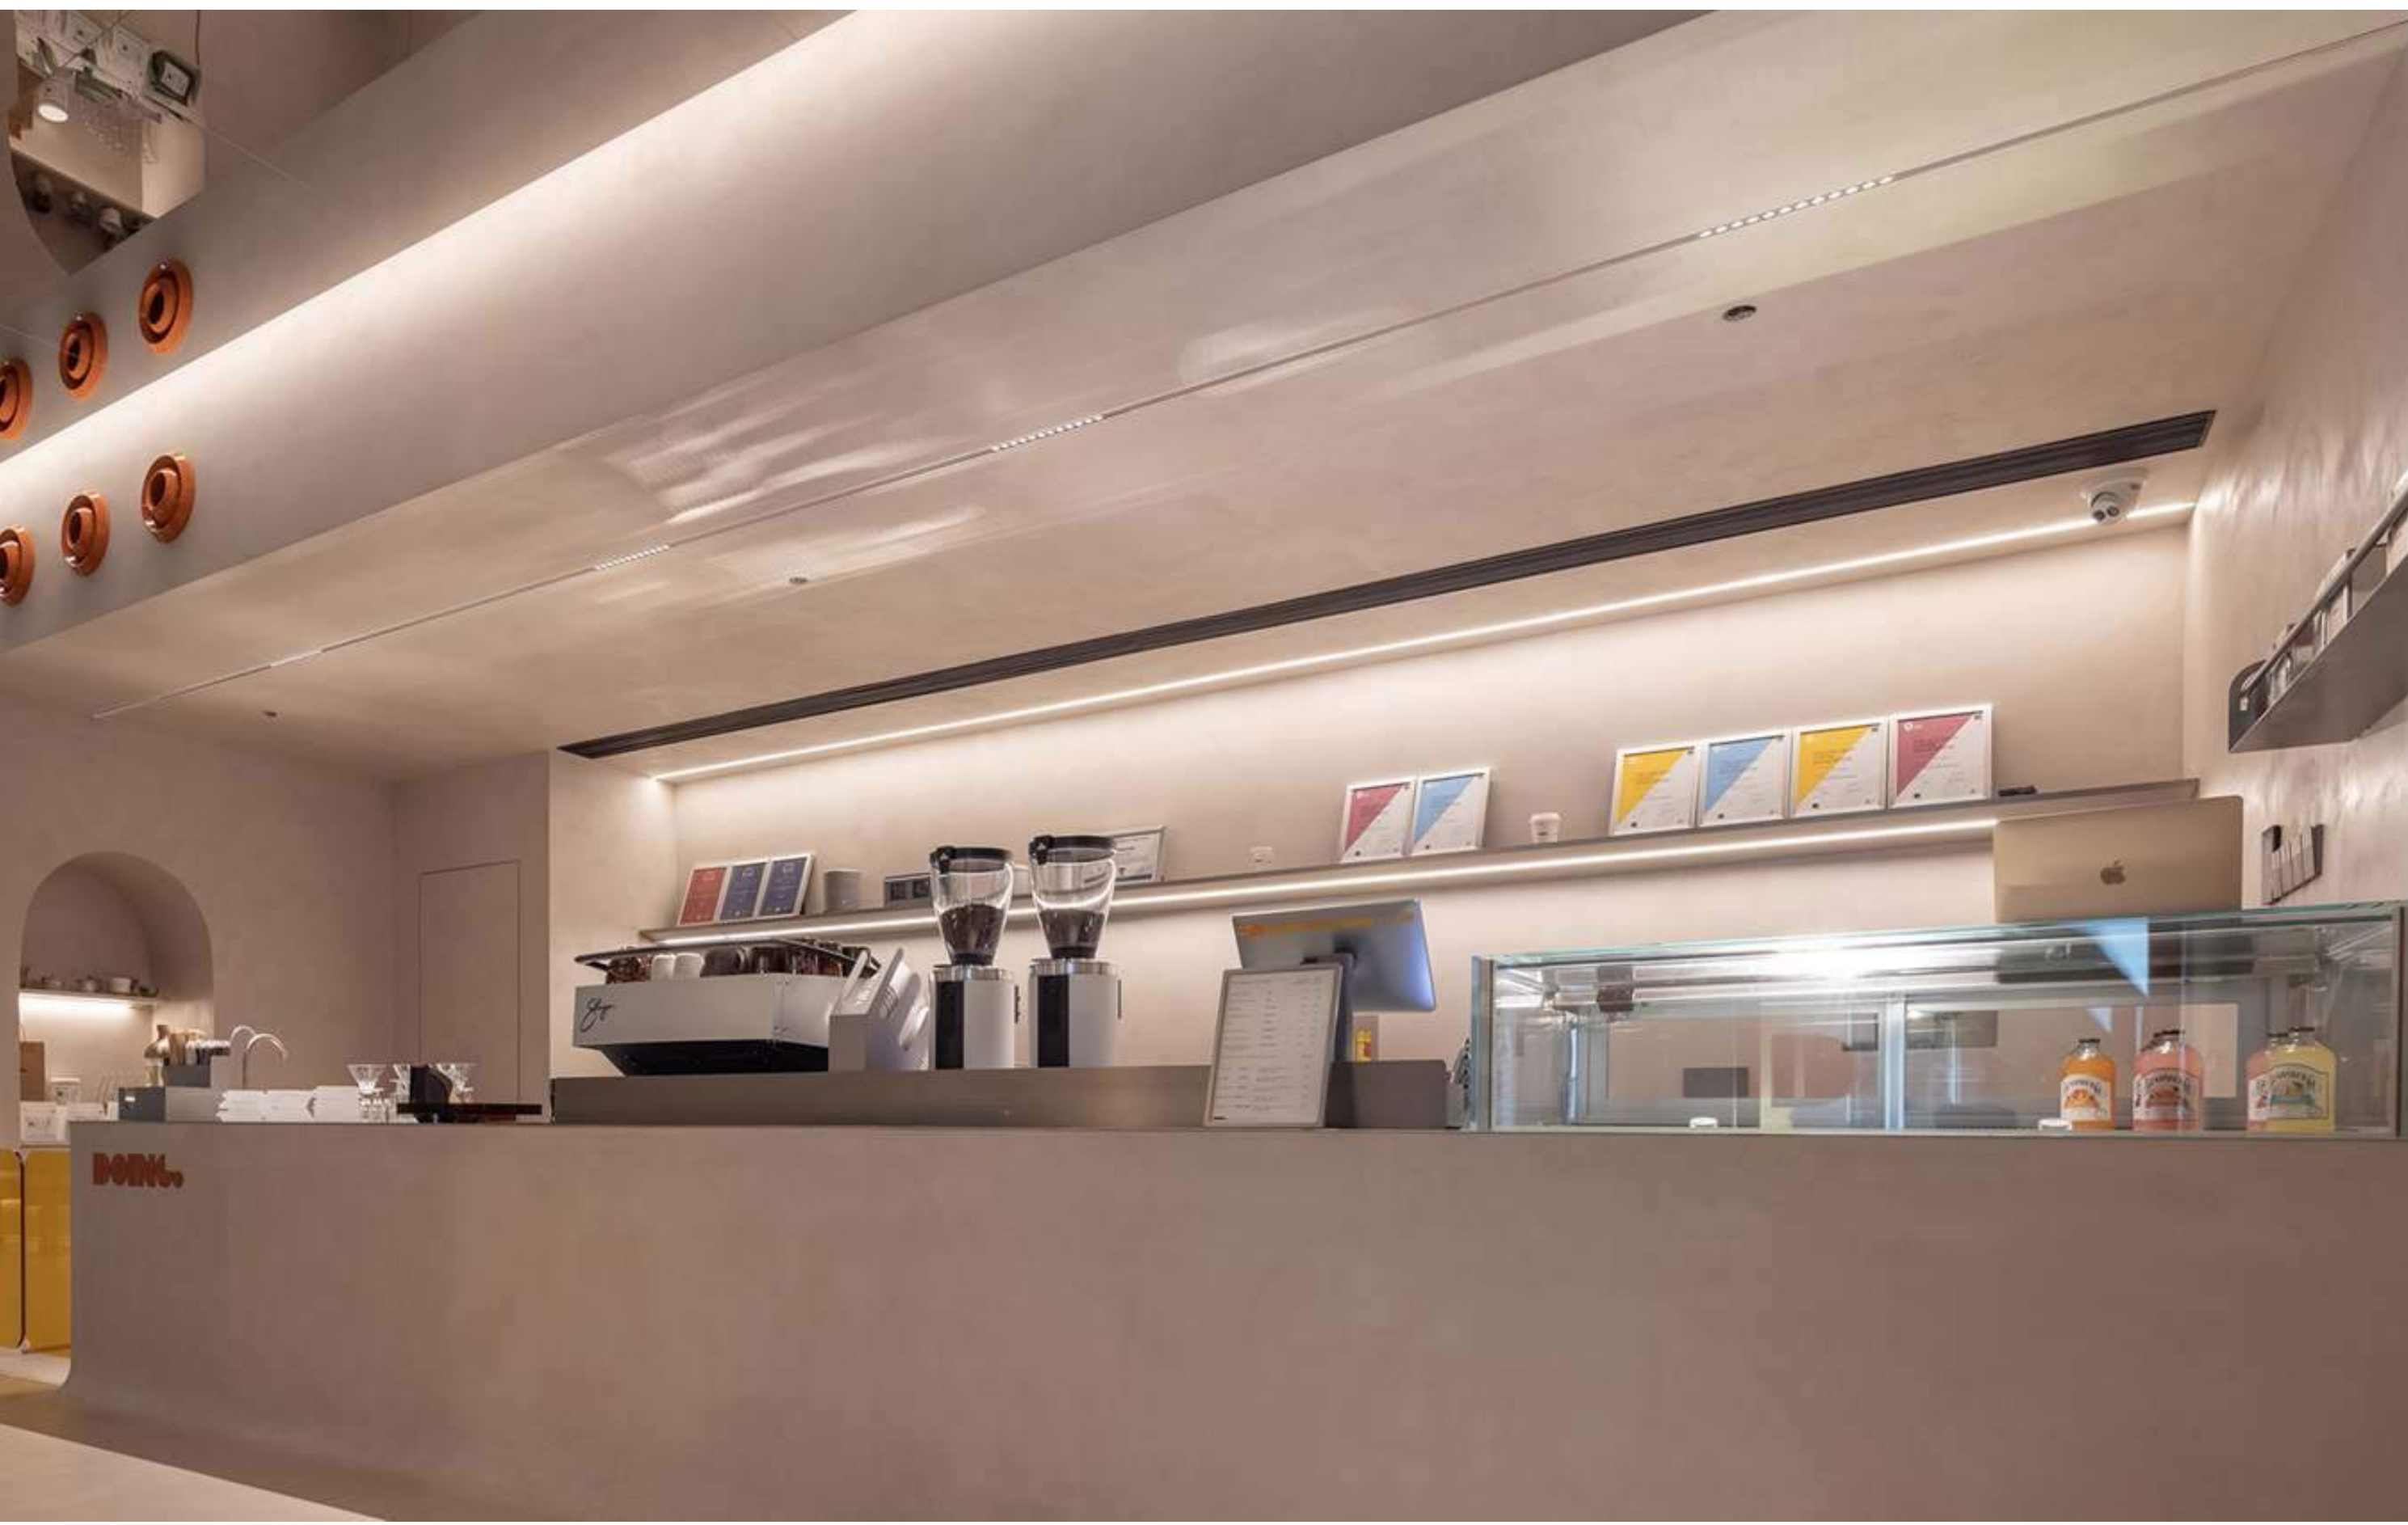

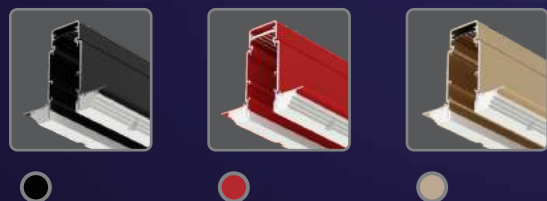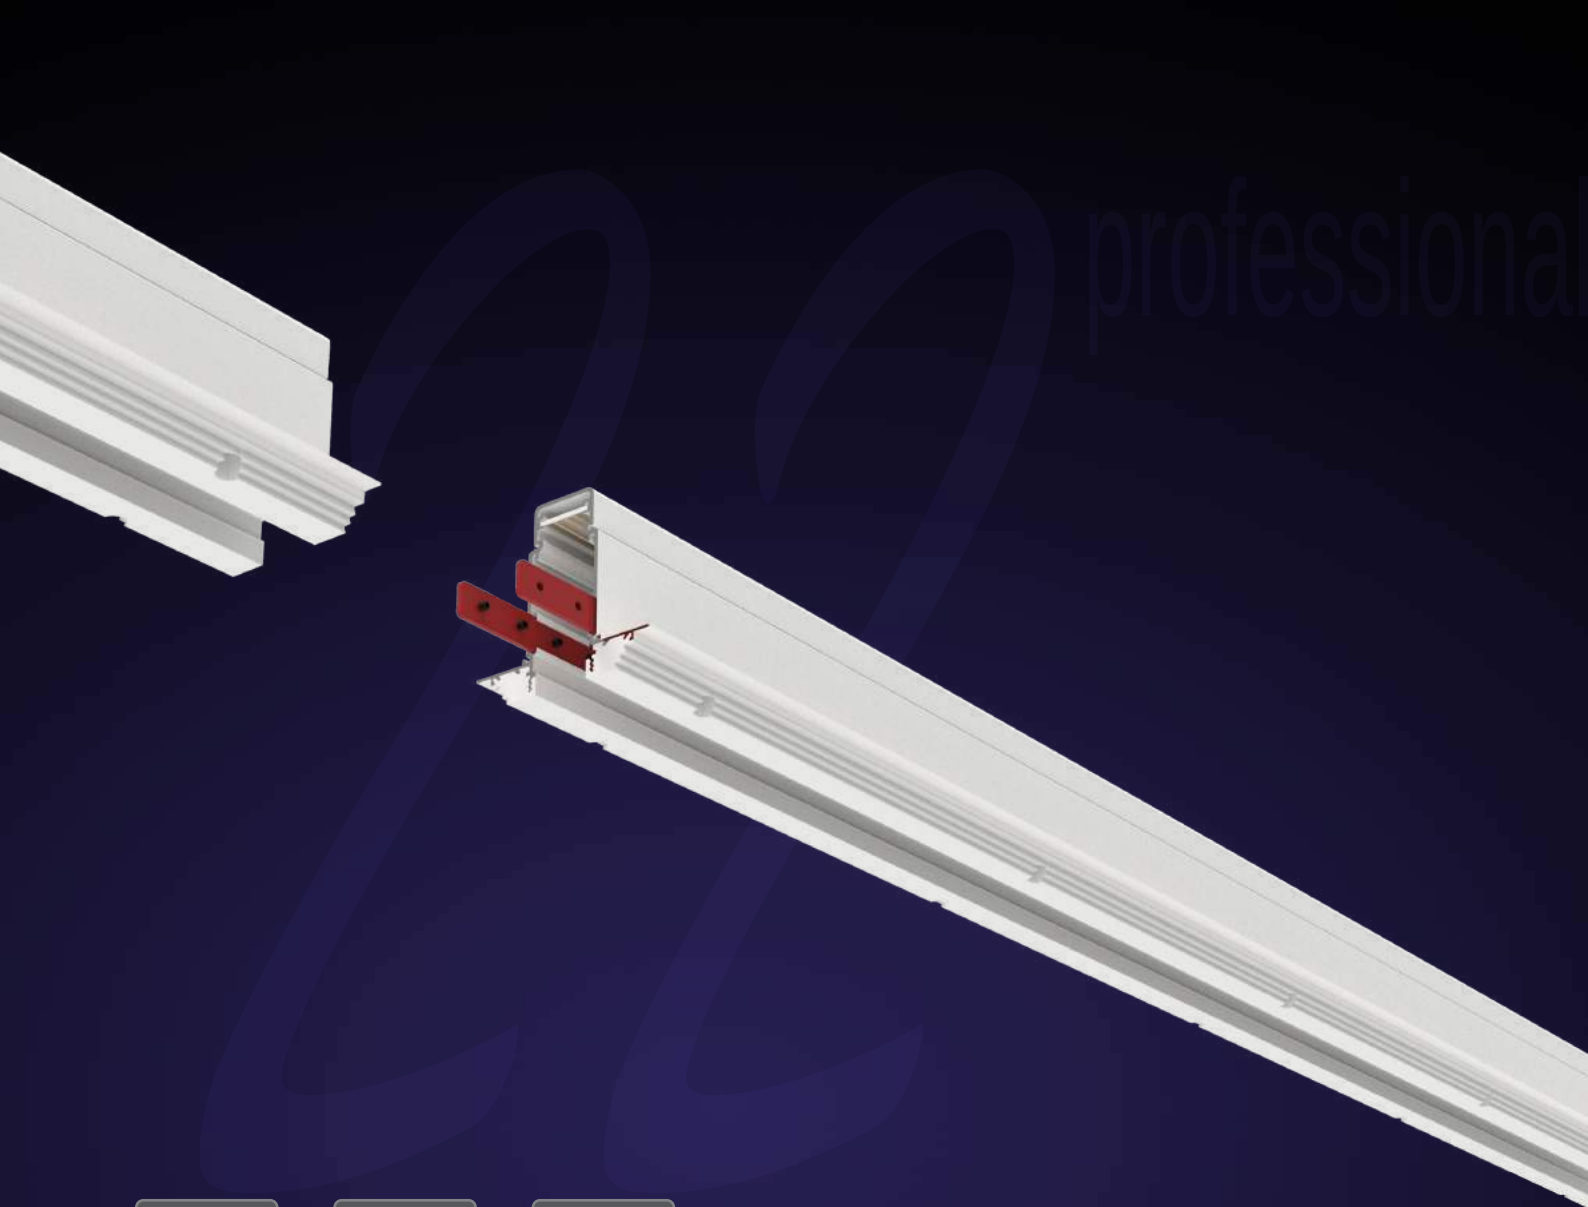

Item No.: KLM-GD8075Y/L1000  
 Installation: Recessed  
 Size: W80\*H75mm  
 L1000/1500/2000mm  
 Control mode: single-group  
 control/three-group control  
 6063 Aluminum  
 Color: B/W/R/G  
 IP20  
 Cut hole: W40\*H85mm  
 Ceiling Thickness: 9mm

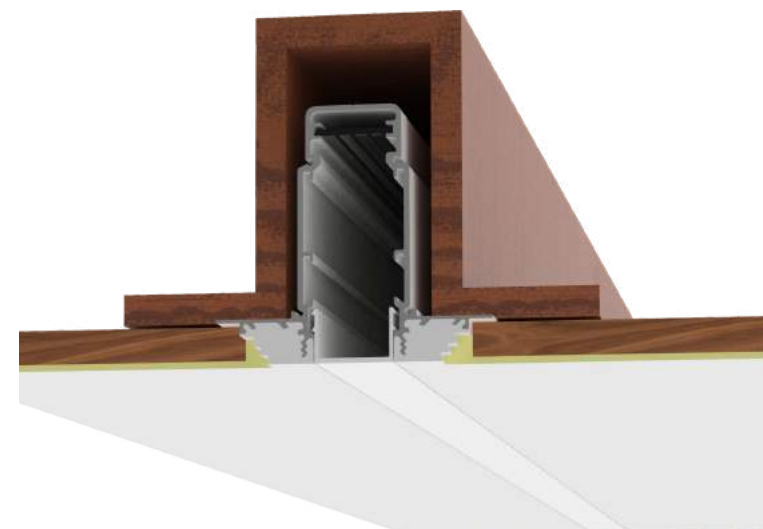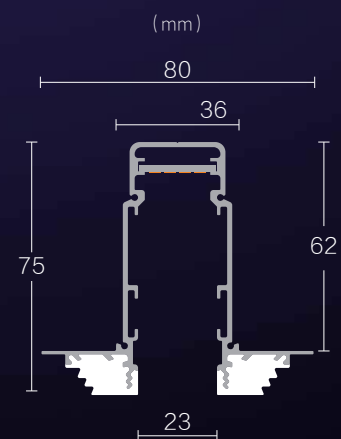

The original gypsum track perfectly solves the problem of batch ash cracking/falling off; it also achieves an endless finish surface and integrates with the ceiling.



KLM-GD8075Y/L150P  
 Cut hole:  
 L(158\*158)\*W40\*H85mm









KLM-GD8075Y/L150NCut  
 hole:  
 L(97\*97)\*W40\*H85mm



KLM-GD8075Y/L150T  
 Cut hole:  
 L(300\*140)\*W40\*H85mm



KLM-GD8075Y/L300S  
 Cut hole:  
 L(300\*300)\*W40\*H85mm



22mm professional series

Spotlight



|                  |            |                   |    |     |               |     |
|------------------|------------|-------------------|----|-----|---------------|-----|
| KLM-SD2265/3W    | ø22*L65mm  | Osram             | 3W | ≥90 | 15° /24°      | DIM |
| KLM-SD223463/5W  | ø34*L63mm  | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° | DIM |
| KLM-SD2234100/8W | ø34*L100mm | Honourtek/Luminus | 8W | ≥90 | 15° /24° /38° | DIM |

Pendant Light



|                   |            |                   |    |     |               |     |
|-------------------|------------|-------------------|----|-----|---------------|-----|
| KLM-DXD2234200/5W | ø34*L200mm | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° | DIM |
|-------------------|------------|-------------------|----|-----|---------------|-----|

180° Adjustable  
Linear Light



|                          |                 |       |     |     |     |     |
|--------------------------|-----------------|-------|-----|-----|-----|-----|
| KLM-GSD22155/L220/T12W/G | L220*W22*H155mm | Osram | 12W | ≥90 | 25° | DIM |
|--------------------------|-----------------|-------|-----|-----|-----|-----|

Linear Light



|                        |                |       |     |     |     |     |
|------------------------|----------------|-------|-----|-----|-----|-----|
| KLM-GSD2240/L220/12W/G | L220*W22*H65mm | Osram | 12W | ≥90 | 25° | DIM |
| KLM-GSD2240/L545/25W/G | L545*W22*H65mm | Osram | 25W | ≥90 | 25° | DIM |

180° Adjustable  
PC linear light



|                         |                 |       |    |     |      |     |
|-------------------------|-----------------|-------|----|-----|------|-----|
| KLM-PMD22155/L247/T8W/G | L243*W21*H155mm | Osram | 8W | ≥90 | 100° | DIM |
|-------------------------|-----------------|-------|----|-----|------|-----|

22mm professional series


PC linear light




|                        |                |       |     |     |      |     |
|------------------------|----------------|-------|-----|-----|------|-----|
| KLM-PMD2265/L247/8W/G  | L247*W22*H65mm | Osram | 8W  | ≥90 | 100° | DIM |
| KLM-PMD2265/L485/16W/G | L485*W22*H65mm | Osram | 16W | ≥90 | 100° | DIM |
| KLM-PMD2165/L965/30W/G | L965*W22*H65mm | Osram | 30W | ≥90 | 100° | DIM |



## Seamless

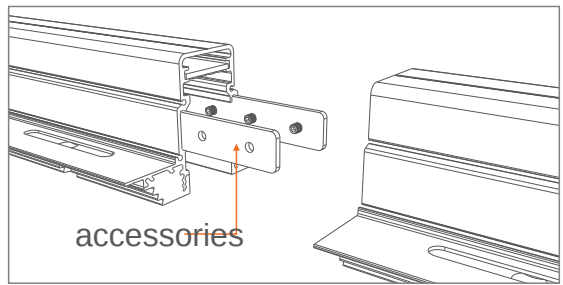


## Cut hole

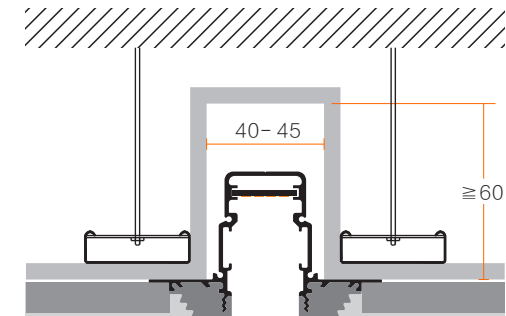


tem No.: KLM-GD8250Y/L1000

Cut hole: W40\*H60mm

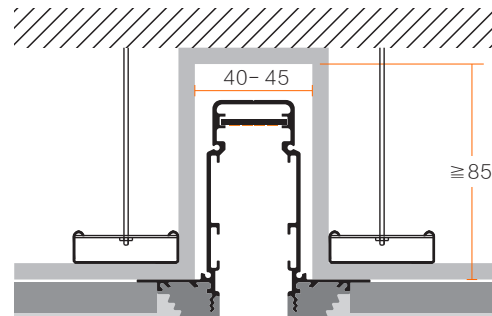


Item No.: KLM-GD8075Y/L1000开孔

Cut hole: W40\*H85mm

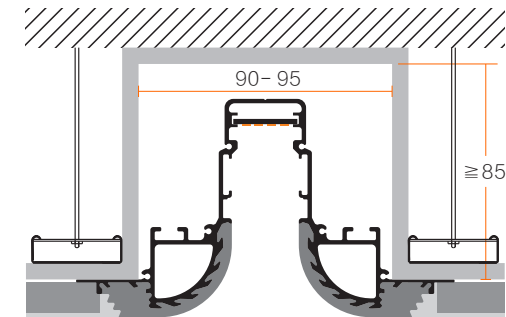

Item No.: KLM-GD13075Y/L1000/H开孔

Cut hole: W90\*H85mm

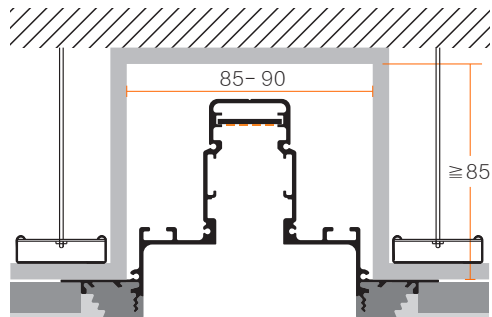


Item No.: KLM-GD13075/L1000/F开孔


Cut hole: W85\*H85mm

## Installnation

### Control all lamps together

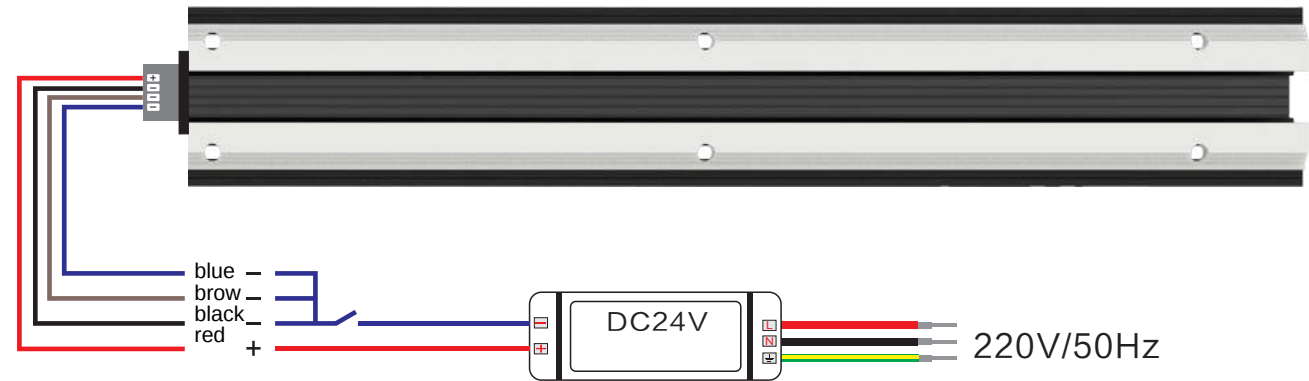

### Separated control all lamps



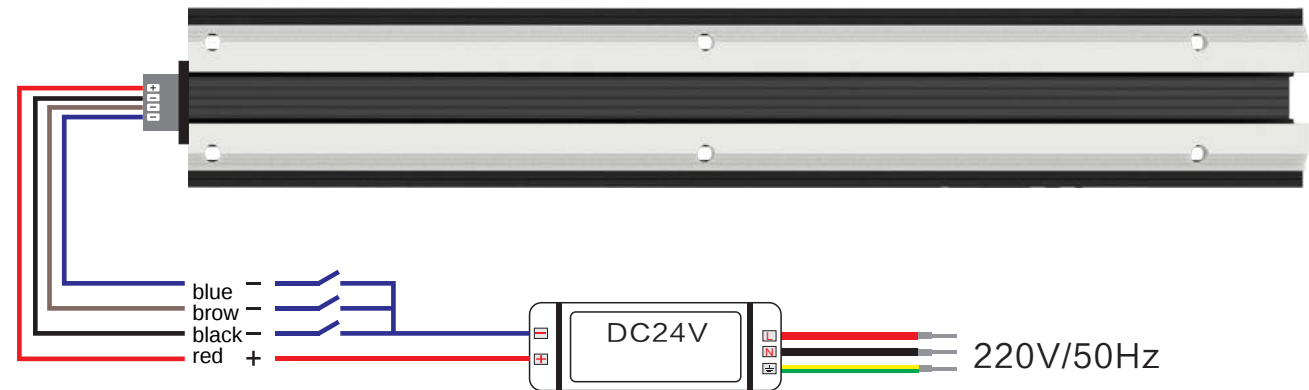


※Above connect info for NO DIM.

### Remark:


- 1. All system with DC24V , when connect with power supply , power better more than lamps watts 20%+
- 2. Magnetic track bar can not more than 5m,5M power a group of individual breakouts , suggest 3m/system

Installation

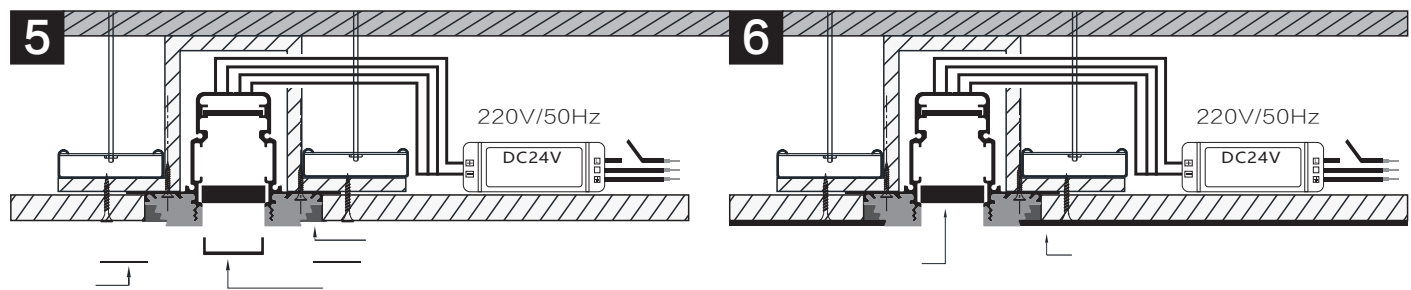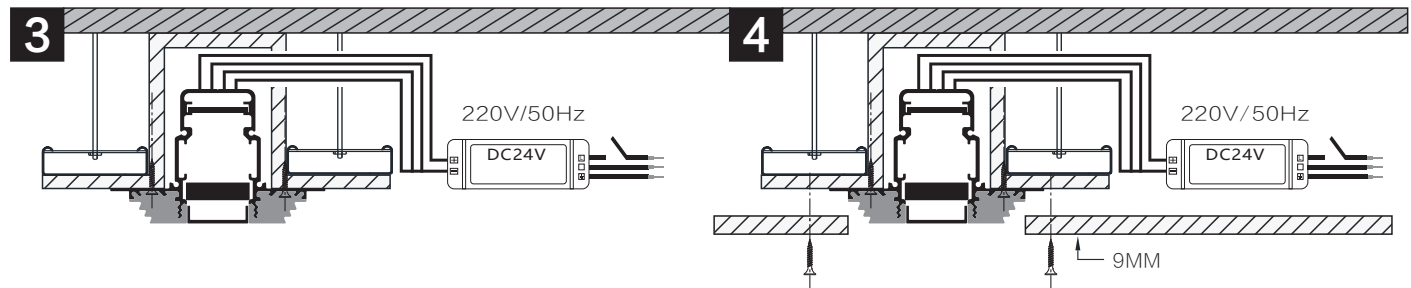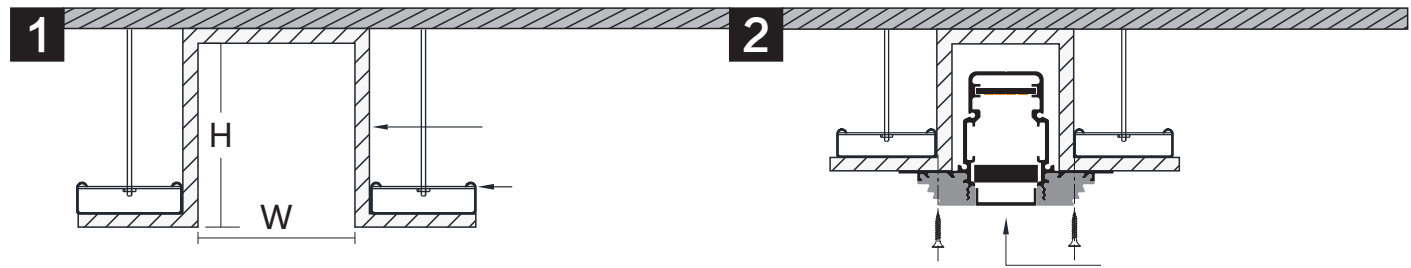





34 MM 6wire  
Gypsum magnetic  
series. . .

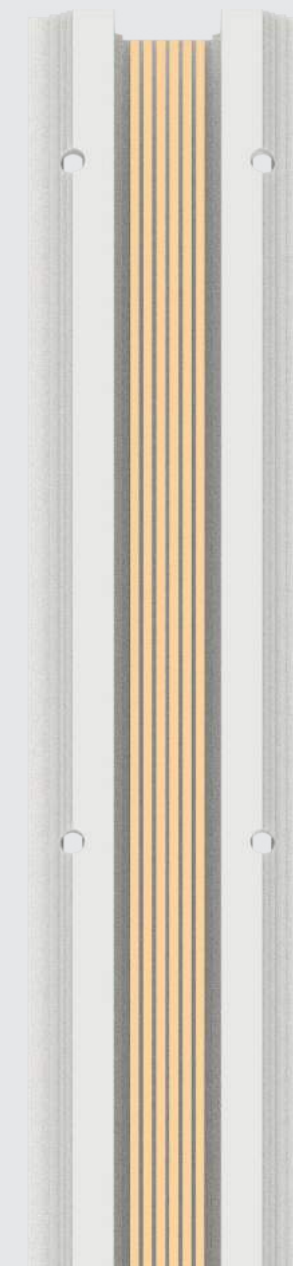



Free touch  
DC24V safe voltage

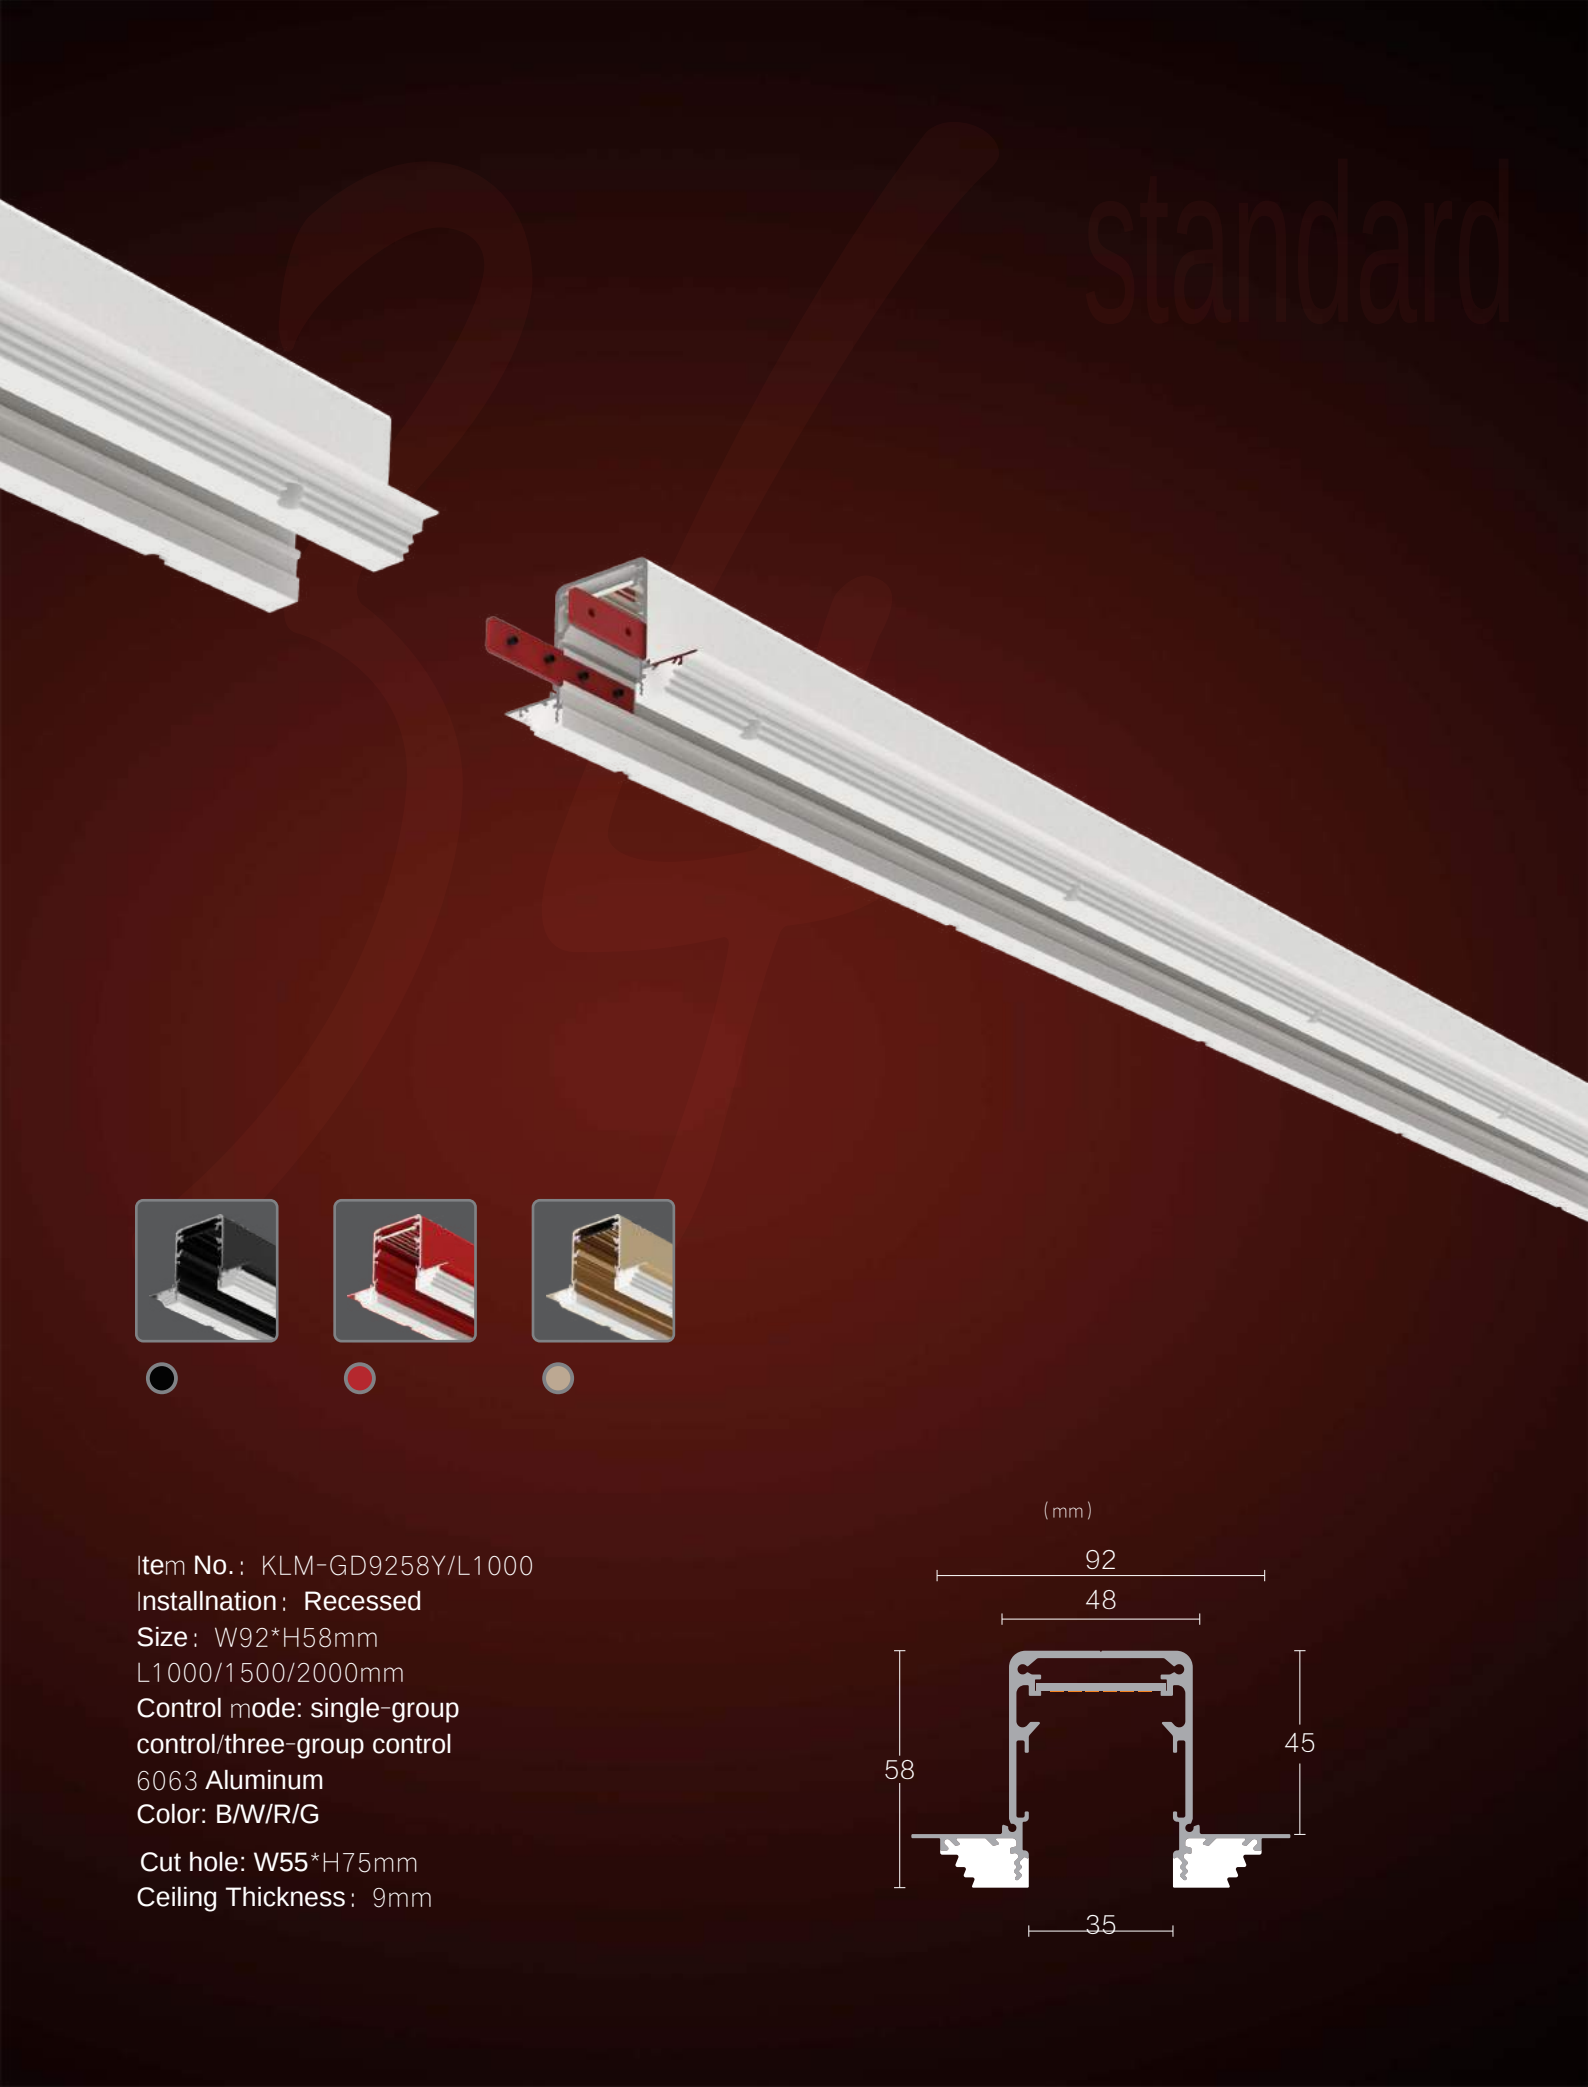

standard

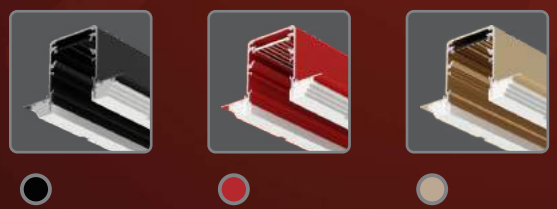

Item No.: KLM-GD9258Y/L1000  
Installation: Recessed  
Size: W92\*H58mm  
L1000/1500/2000mm  
Control mode: single-group  
control/three-group control  
6063 Aluminum  
Color: B/W/R/G  
Cut hole: W55\*H75mm  
Ceiling Thickness: 9mm

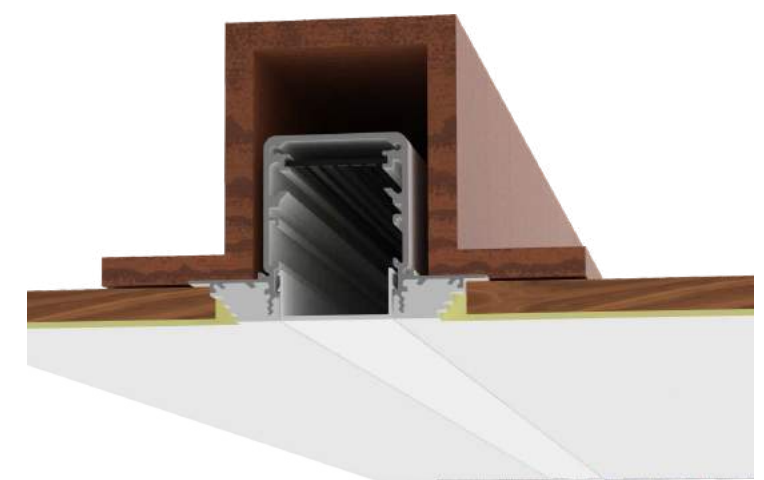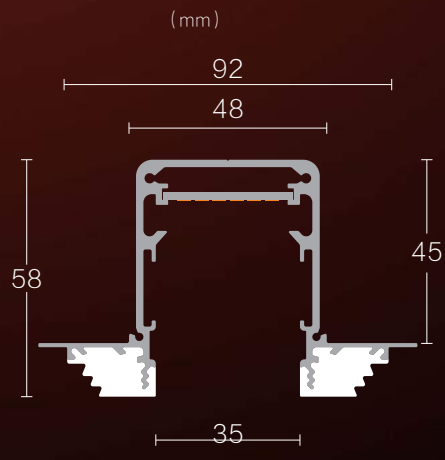

The original gypsum track perfectly solves the problem of batch ash cracking/falling off; it also achieves an endless finish surface and integrates with the ceiling.



34mm Sandard Series

Spotlight



|                 |            |                   |     |     |               |     |
|-----------------|------------|-------------------|-----|-----|---------------|-----|
| KLM-SD3463/5W   | ø34*L63mm  | Honourtek/Luminus | 5W  | ≥90 | 15° /24° /38° | DIM |
| KLM-SD34100/8W  | ø34*L100mm | Honourtek/Luminus | 8W  | ≥90 | 15° /24° /38° | DIM |
| KLM-SD34150/10W | ø34*L150mm | Honourtek/Luminus | 10W | ≥90 | 15° /24° /38° | DIM |
| KLM-SD64120/15W | ø64*L120mm | Honourtek/Luminus | 15W | ≥90 | 15° /24° /38° | DIM |
| KLM-SD64140/18W | ø64*L140mm | Honourtek/Luminus | 18W | ≥90 | 15° /24° /38° | DIM |
| KLM-SD64160/22W | ø64*L160mm | Honourtek/Luminus | 22W | ≥90 | 15° /24° /38° | DIM |

Pendant Light



|                 |            |                   |    |     |               |     |
|-----------------|------------|-------------------|----|-----|---------------|-----|
| KLM-DXD34200/5W | ø34*L200mm | Honourtek/Luminus | 5W | ≥90 | 15° /24° /38° | DIM |
|-----------------|------------|-------------------|----|-----|---------------|-----|

180° Adjustable Linear Light



|                          |                 |       |     |     |                            |     |
|--------------------------|-----------------|-------|-----|-----|----------------------------|-----|
| KLM-GSD34118/L162/T6W/J  | L162*W34*H118mm | Osram | 12W | ≥90 | 10° /24° /34° /48° /10*35° | DIM |
| KLM-GSD34118/L322/T12W/J | L322*W34*H118mm | Osram | 22W | ≥90 | 10° /24° /34° /48° /10*35° | DIM |


Linear Light



|                        |                |       |     |     |                            |     |
|------------------------|----------------|-------|-----|-----|----------------------------|-----|
| KLM-GSD3447/L162/6W/J  | L162*W34*H47mm | Osram | 12W | ≥90 | 10° /24° /34° /48° /10*35° | DIM |
| KLM-GSD3447/L322/12W/J | L322*W34*H47mm | Osram | 22W | ≥90 | 10° /24° /34° /48° /10*35° | DIM |

34mm Sandard Series

180° Adjustable PC linear light



|                          |                 |       |     |     |      |     |
|--------------------------|-----------------|-------|-----|-----|------|-----|
| KLM-PMD34118/L178/T8W/J  | L178*W34*H118mm | Osram | 8W  | ≥90 | 100° | DIM |
| KLM-PMD34118/L342/T15W/J | L342*W34*H118mm | Osram | 15W | ≥90 | 100° | DIM |

PC linear light



|                         |                 |       |     |     |      |     |
|-------------------------|-----------------|-------|-----|-----|------|-----|
| KLM-PMD3447/L342/15W/J  | L342*W34*H47mm  | Osram | 15W | ≥90 | 100° | DIM |
| KLM-PMD3447/L505/20W/J  | L505*W34*H47mm  | Osram | 20W | ≥90 | 100° | DIM |
| KLM-PMD3447/L1002/40W/J | L1002*W34*H47mm | Osram | 40W | ≥90 | 100° | DIM |

PC linear light



|                        |                |       |     |     |      |     |
|------------------------|----------------|-------|-----|-----|------|-----|
| KLM-SMD3475/L342/15W/J | L342*W34*H75mm | Osram | 15W | ≥90 | 140° | DIM |
|------------------------|----------------|-------|-----|-----|------|-----|

PC linear light



|                        |                |       |     |     |     |     |
|------------------------|----------------|-------|-----|-----|-----|-----|
| KLM-PGD3447/L342/12W/J | L342*W34*H47mm | Osram | 12W | ≥90 | 35° | DIM |
|------------------------|----------------|-------|-----|-----|-----|-----|

PC linear light



|                        |                 |       |     |     |     |     |
|------------------------|-----------------|-------|-----|-----|-----|-----|
| KLM-XQD34122/L342/12W/ | L342*W34*H122mm | Osram | 12W | ≥90 | 75° | DIM |
|------------------------|-----------------|-------|-----|-----|-----|-----|





### Gypsum track

The finish of track and ceiling can be polished together to make the finish more flat and beautiful after the completion of ceiling; The combination of white track and white lamps makes the space more elegant, concise, clean and fresh


series







Installation


Control all lamps together

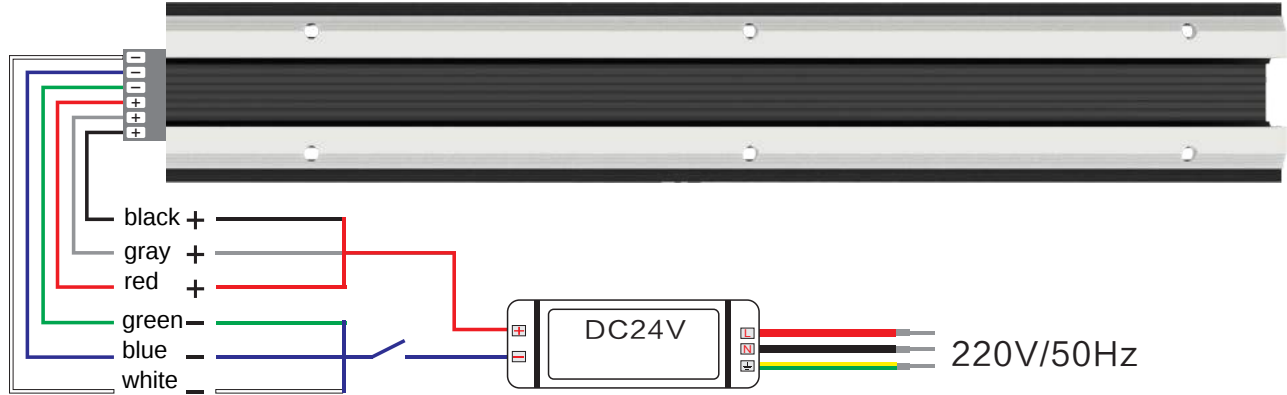

Separated control all lamps

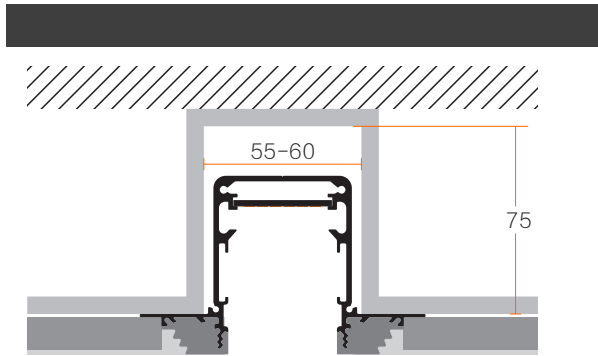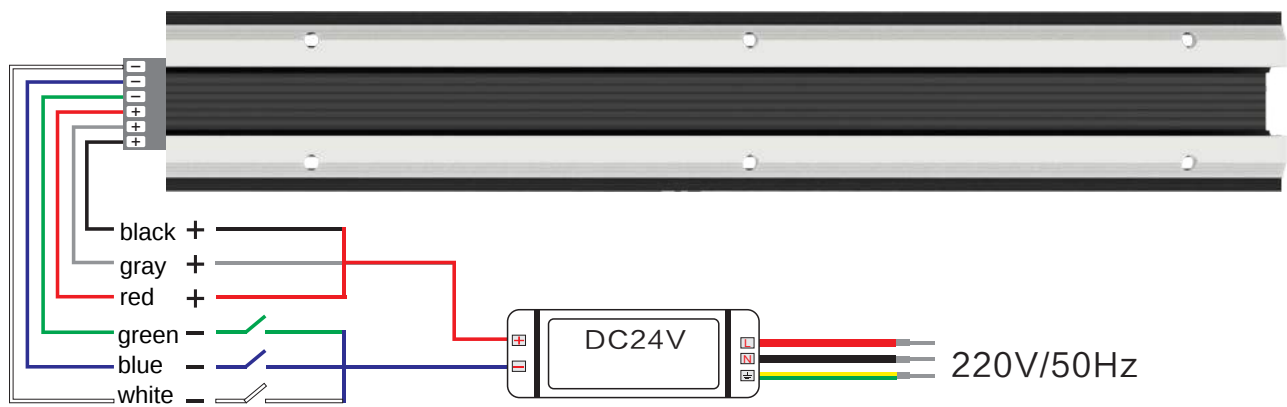

Seamless

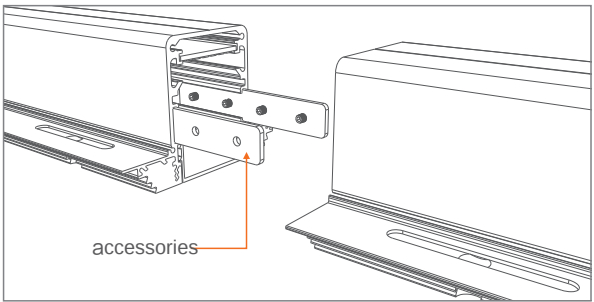

Item No.: KLM-GD9258Y/L1000开  
Cut hole: W55\*H75mm

Installation

