

Leather

Linear light series



www.klmlighting.com

22mm standard series - Leather

KLM-GD3380D



KLM-GD33100D




KLM-GD4092D



A

KLM-XXD3276D/L1136/45W



B

KLM-XXD1213D/L1000/10W



C

KLM-XXD1842D/L1000/26W



KLM-XXD2045D/L1000/30W



KLM-XXD2158D/L1000/34W



KLM-XXD3050D/L1000/38W




KLM-XXD4065D/L1000/43W





Beam angle


Suspended Up & Down




25°




25°



40°




60°



100°



Leather

colorful option

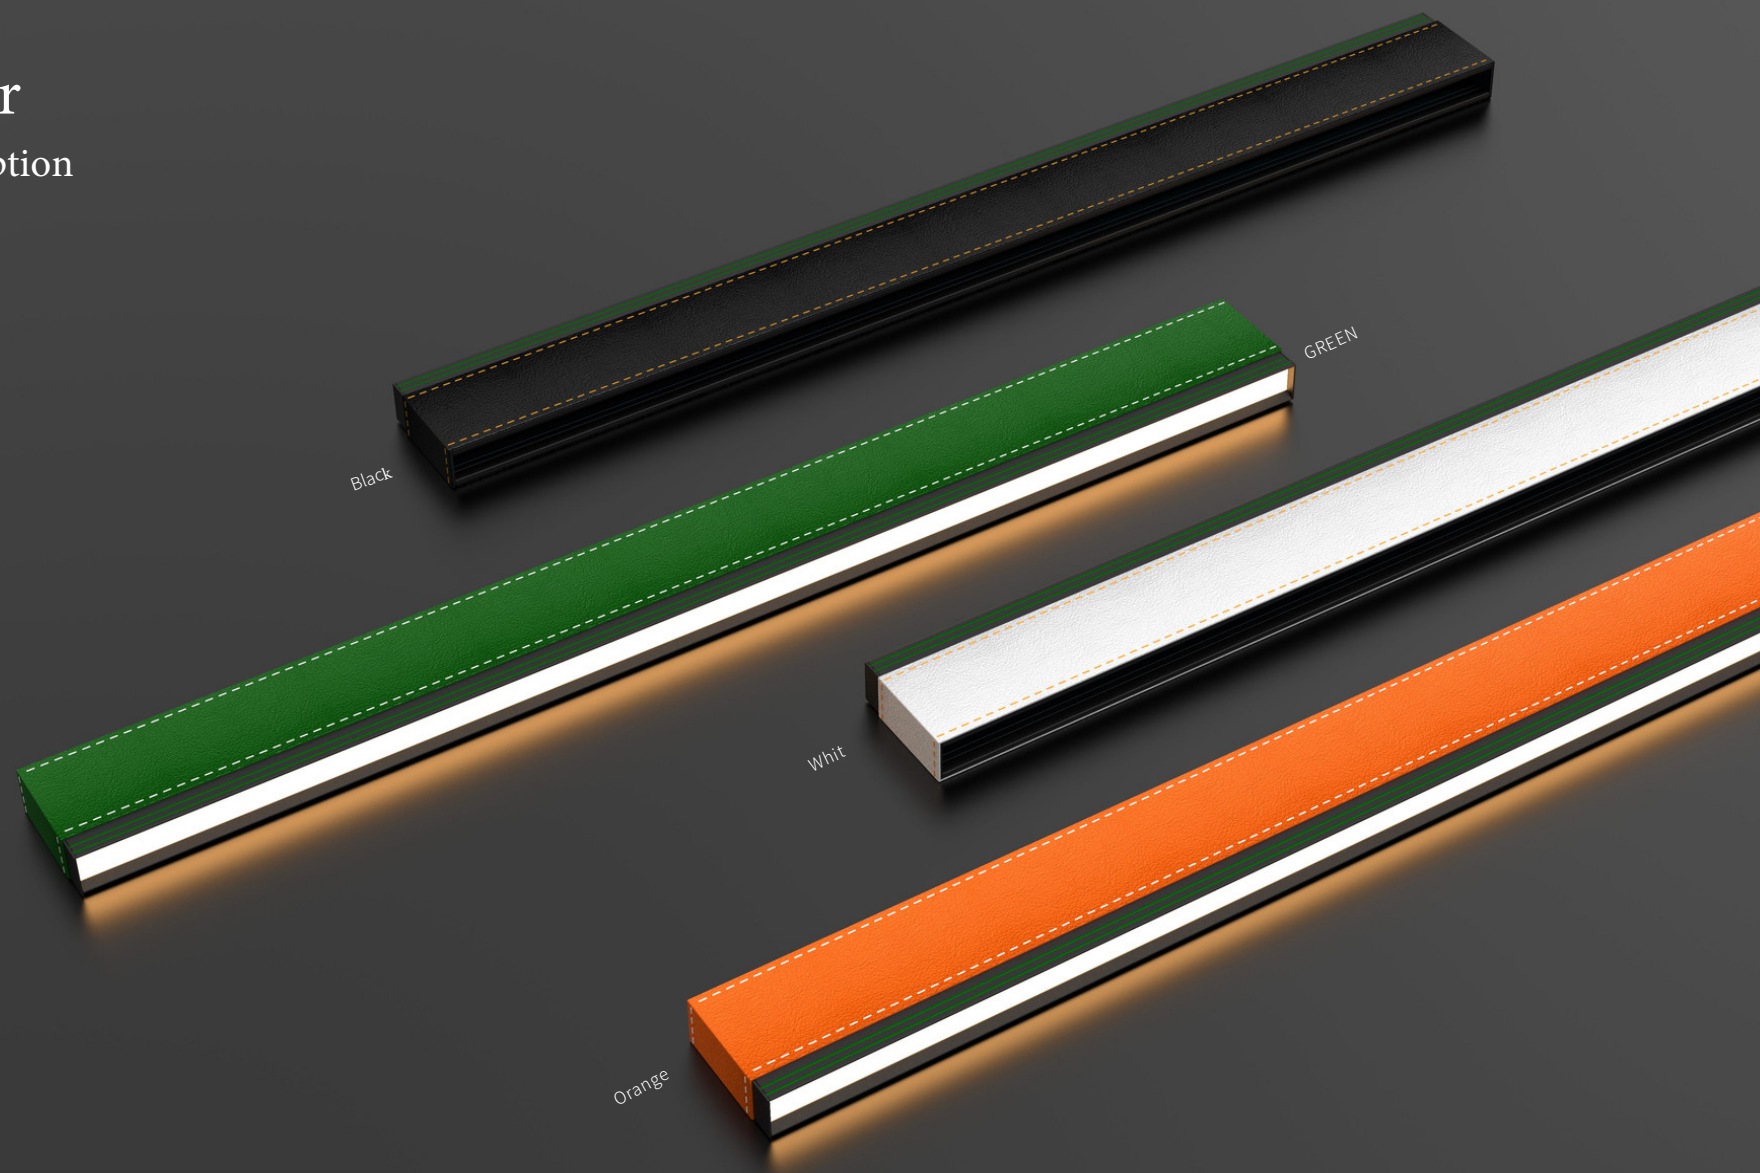


ONE TRACK

TWO OPTION SUSPENDED

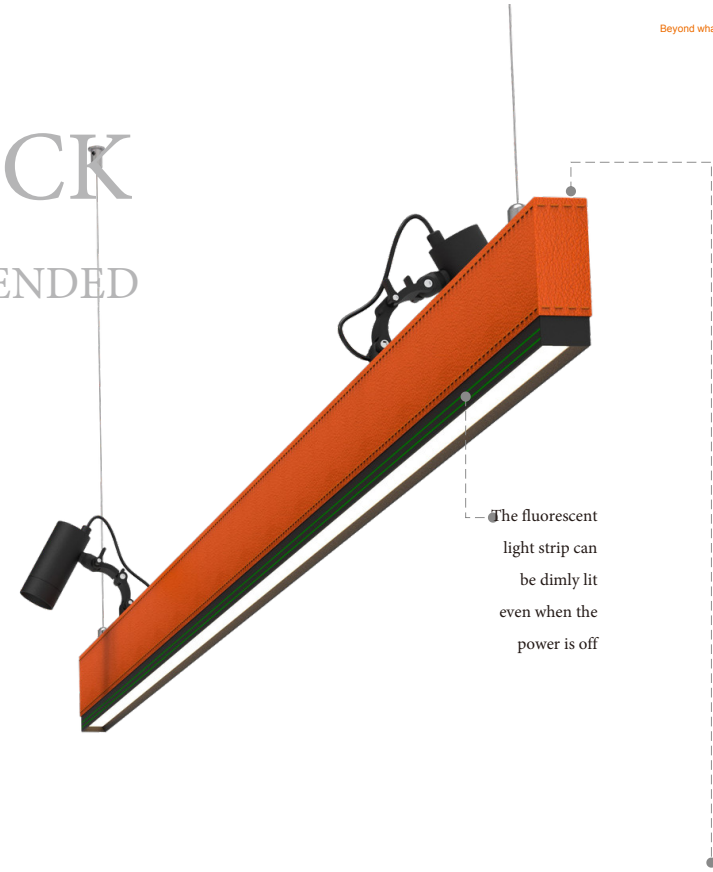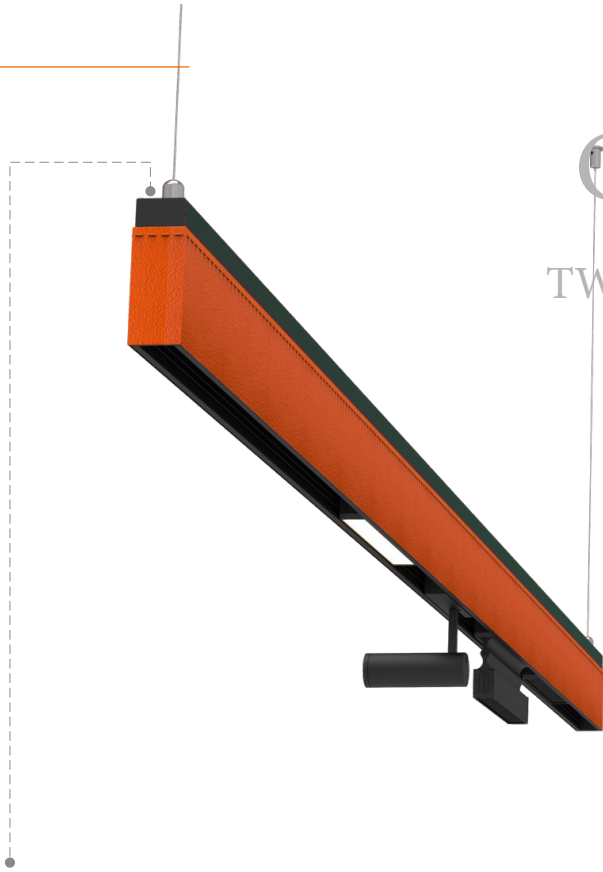


One side linear light, another side magnetic track bar

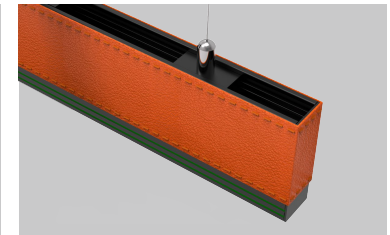


One side linear light, another side magnetic track bar



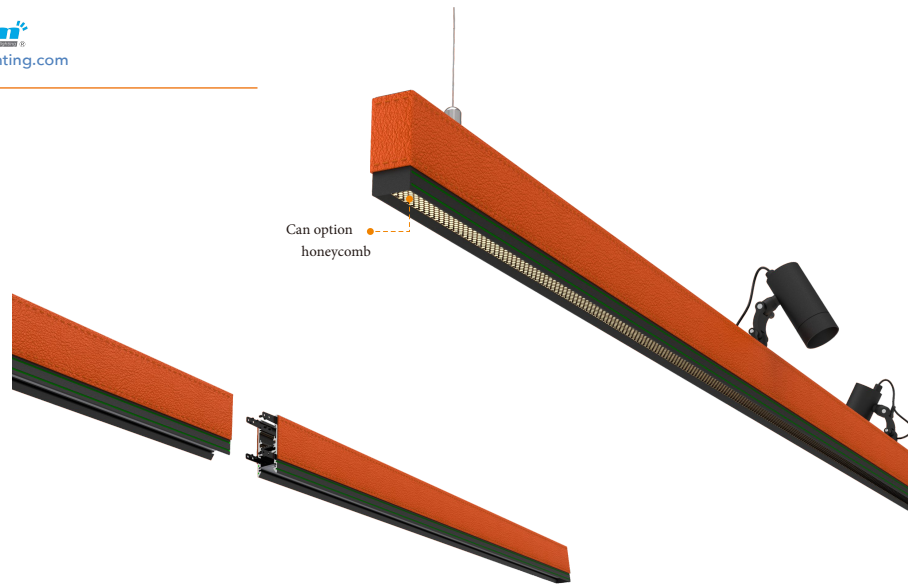


22mm standard series - leather

KLM-GD3380D/L1000/P
Suspended mounted
W33*H80mm
L1000/1500/2000mm
Multi-group control
6063 Aluminum
Body color: Sand BK/Sand WH
Leather Color: Orange/Green/White/
Black
IP20
Can be with honeycomb




32 W/M DC24V Osram
Bridgelux Ra ≥ 90 3000K
3500K
4000K 0-10V
DILI
Triac
dim
DMX512




h(m)	E0° (lx)	ø (m)
1.50	134.30	3.68
2.25	59.69	5.51
3.50	24.67	8.58
4.00	18.89	9.80




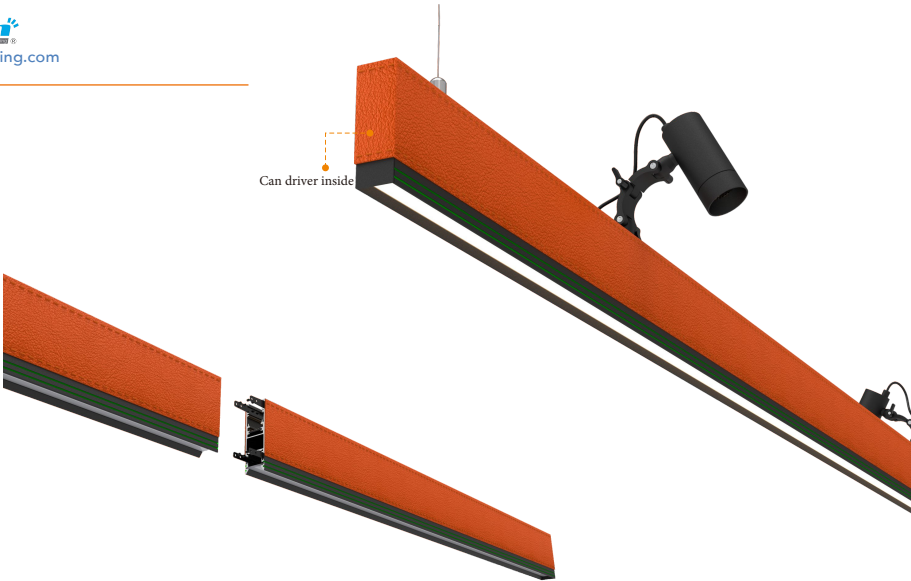



22mm standard -Leather

KLM-GD33100D/L1000/P
Suspended mounted
W33*H100mm
L1000/1500/2000mm
Multi-group control
6063 Aluminum
Body color: Sand BK/Sand WH
Leather Color: Orange/Green/White/
Black
IP20
Inside driver max100W



32 W/M					
DC24V					
Osram Bridgelux					
Ra≥90					
3000K 3500K 4000K					
0-10V DII Triac DIM DMX512					

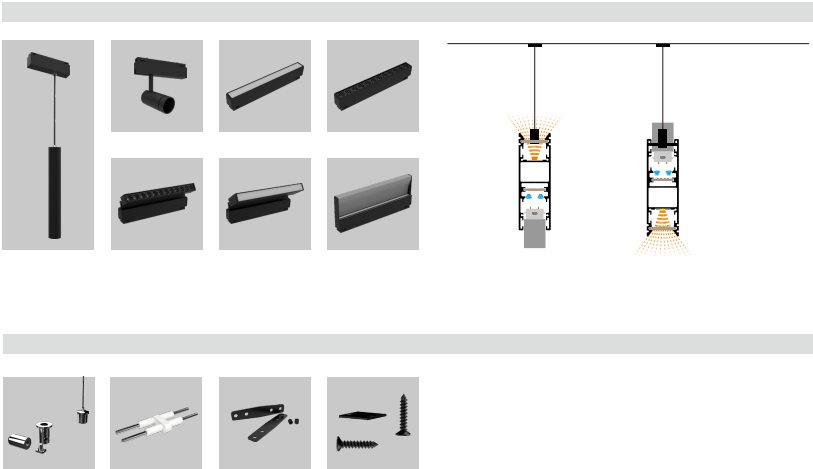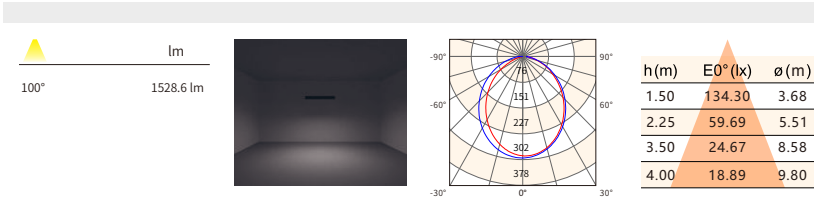

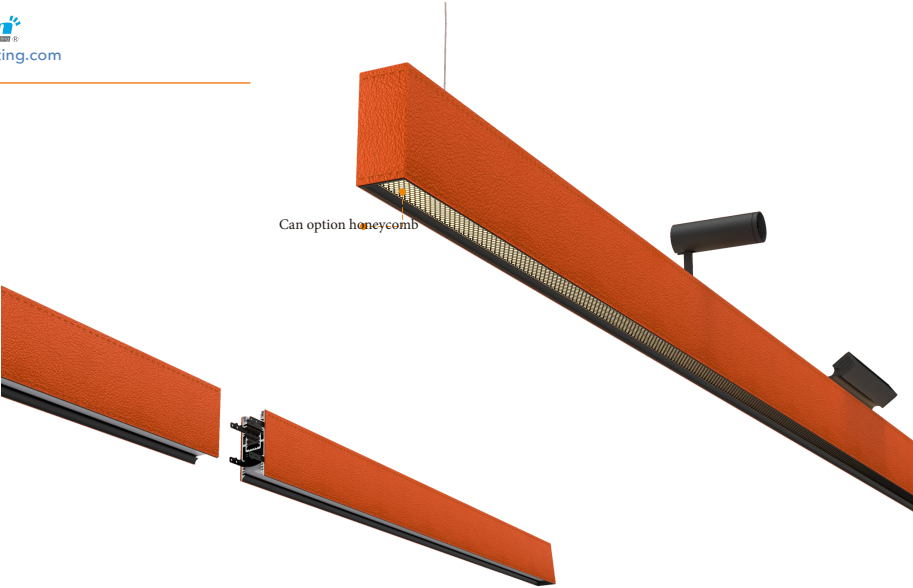

22mm standard -Leather

KLM-GD4092D/L1000/P

Suspended mounted

W40*H92mm

L1000/1500/2000mm

Multi-group control

6063 Aluminum


Body color:Sand BK/Sand WH

Leather Color: Orange/Green/White/ Black



IP20

Can add with honeycomb

Strip size: 4*10mm 10 W/M 615 LM/M DC24V Ra≥90



32 W/M	DC24V	Osram Bridgelux	Ra≥90	3000K 3500K 4000K	0-10V DILI Triac dim DMX512
--------	-------	--------------------	-------	-------------------------	---

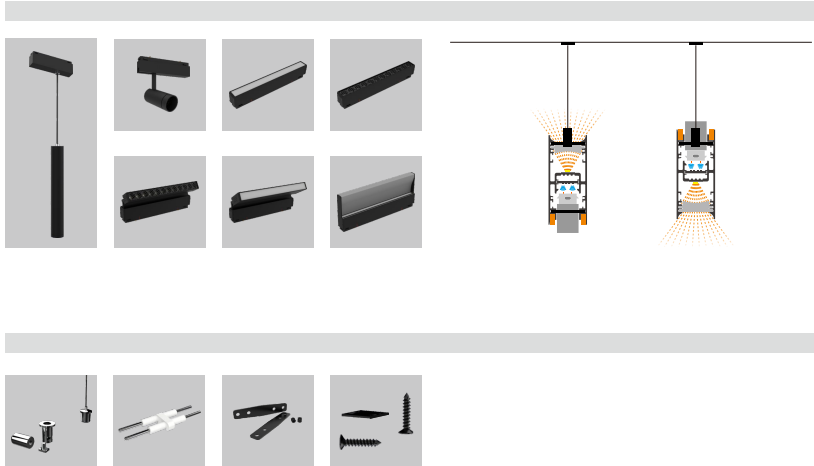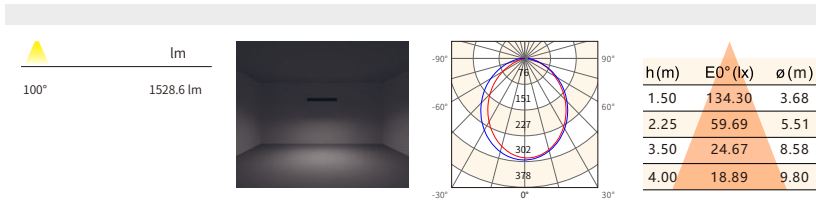

22mm standard lights

Spot light



Item no.	Item no.	LEDs	Power	CRI	Beam Angle	DIM
KLM-SD2265/3W	Ø22*L65mm	Osram	3W	≥90	15°/24°	YES
KLM-SD223463/5W	Ø34*L63mm	Honourtek/Luminus	5W	≥90	15°/24°/38°	YES
KLM-SD2234100/8W	Ø34*L100mm	Honourtek/Luminus	8W	≥90	15°/24°/38°	YES

Suspended light



Item no.	Size	LEDs	Power	CRI	Beam Angle	DIM
KLM-DXD2234200/5W	Ø34*L200mm	Honourtek/Luminus	5W	≥90	15°/24°/38°	YES

180° adjustabe
linear light



Item no.	Size	LEDs	Power	CRI	Beam Angle	DIM
KLM-GSD22105/L220/T7W/G	L220*W22*H105mm	Osram	10W	≥90	25°	YES
KLM-GSD22130/L220/T12W/G	L220*W22*H130mm	Osram	15W	≥90	25°	YES

Linear light



Item no.	Size	LEDs	Power	CRI	Beam Angle	DIM
KLM-GSD2240/L220/T7W/G	L220*W22*H40mm	Osram	7W	≥90	25°	YES
KLM-GSD2240/L545/18W/G	L545*W22*H40mm	Osram	18W	≥90	25°	YES

180° adjustable
PC linear light



Item no.	Size	LEDs	Power	CRI	Beam Angle	DIM
KLM-PMD22130/L247/T8W/G	L243*W21*H130mm	Osram	8W	≥90	100°	YES

22mm standard lights

PC Linear light



Item no.	Size	LEDs	Power	CRI	Beam Angle	DIM
KLM-PMD2240/L247/8W/G	L247*W22*H40mm	Osram	8W	≥90	100°	YES
KLM-PMD2240/L485/16W	L485*W22*H40mm	Osram	16W	≥90	100°	YES
KLM-PMD2140/L965/30W	L965*W22*H40mm	Osram	30W	≥90	100°	YES

Wall washer linear light



Item no.	Size	LEDs	Power	CRI	Beam Angle	DIM
KLM-XQD22100/L247/8W/G	L247*W22*H100mm	Osram	8W	≥90	75°	YES

Linear Up choose this one


Spotlights



Item no.	Size	LEDs	Power	CRI	Beam Angle	DIM
KLM-SD45100P/10W	Ø45*L100mm	Honourtek/Luminus	10W	≥90	15°/24°/38°	YES
KLM-SD45120P/12W	Ø45*L120mm	Honourtek/Luminus	12W	≥90	15°/24°/38°	YES
KLM-SD45140P/15W	Ø45*L140mm	Honourtek/Luminus	15W	≥90	15°/24°/38°	YES





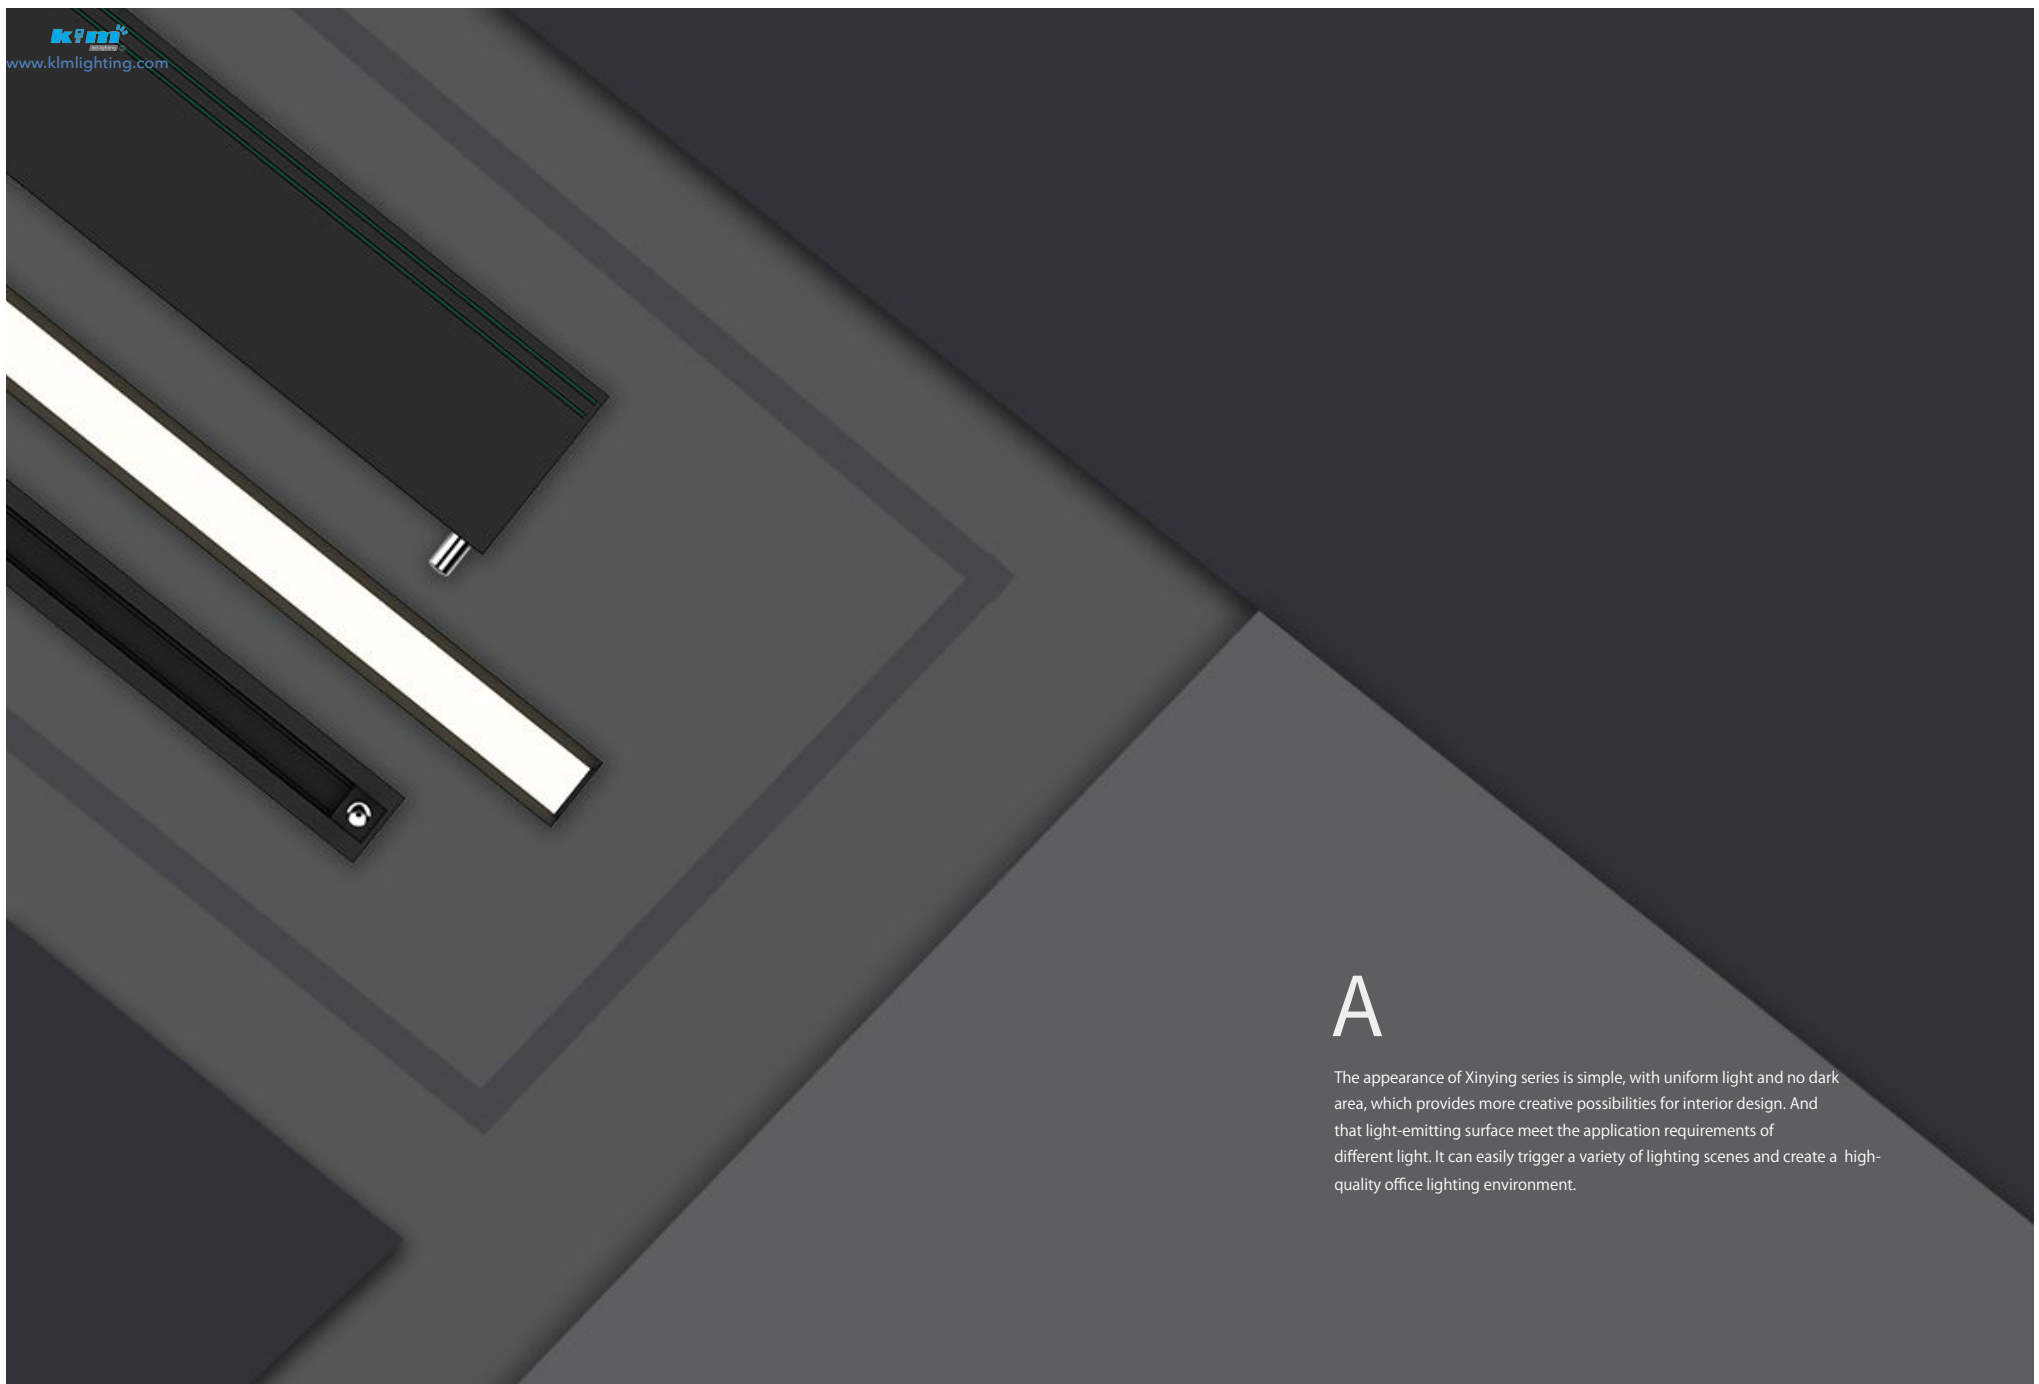

A

The appearance of Xinying series is simple, with uniform light and no dark area, which provides more creative possibilities for interior design. And that light-emitting surface meet the application requirements of different light. It can easily trigger a variety of lighting scenes and create a high-quality office lighting environment.



Suspended UP & DOWN Linear light




Flush Emitting Surface



Up&Down Separate ON/OFF



Hand Sweeper Switch

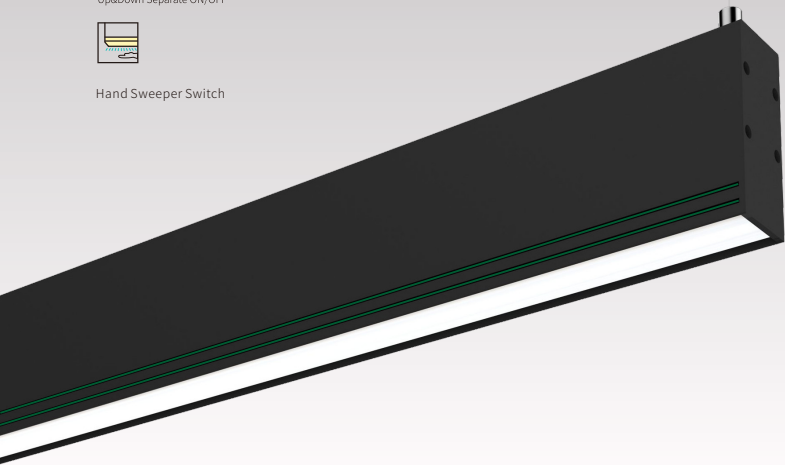

综合特点 General Features



无缝扩散罩
Seamless efficiency



无频闪
Flicker free



室内使用
Indoor



可回收物
Recyclable



CE 认证
CE Certification



IP 20
Protection level



高光效
High luminous
efficacy

KLM-XXD3276D/L1136/45W

L1136*W32*H76mm

6063 Aluminum

Body color: Sand BK/Sand WH

IP20

Osram/Bridgelux LEDs


DC24V/AC220V

35W+10W

2700K/3000K/4000K

CRI : ≥ 90

Beam angle : 40°/60°/100°/Asymmetric 25° /Double Asymmetric 25°



Beyond what you want to lead the future

UP:

功率 Power	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
		lm																		
10W	100°	236.2 lm			<table><tr><th>h(m)</th><th>E0'(lx)</th><th>e(m)</th></tr><tr><td>1.50</td><td>40.32</td><td>3.28</td></tr><tr><td>2.25</td><td>17.92</td><td>4.92</td></tr><tr><td>3.50</td><td>7.40</td><td>7.65</td></tr><tr><td>4.00</td><td>5.67</td><td>8.74</td></tr></table>	h(m)	E0'(lx)	e(m)	1.50	40.32	3.28	2.25	17.92	4.92	3.50	7.40	7.65	4.00	5.67	8.74
h(m)	E0'(lx)	e(m)																		
1.50	40.32	3.28																		
2.25	17.92	4.92																		
3.50	7.40	7.65																		
4.00	5.67	8.74																		

DOWN:

功率 Power	灯具型号 Model	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
35W	KLM-XXD3276D/L1136	40°	536.1 lm			<table><tr><th>h(m)</th><th>E0'(lx)</th><th>e(m)</th></tr><tr><td>1.50</td><td>549.76</td><td>1.91</td></tr><tr><td>2.25</td><td>644.34</td><td>2.37</td></tr><tr><td>3.50</td><td>700.98</td><td>2.93</td></tr><tr><td>4.00</td><td>877.31</td><td>3.44</td></tr></table>	h(m)	E0'(lx)	e(m)	1.50	549.76	1.91	2.25	644.34	2.37	3.50	700.98	2.93	4.00	877.31	3.44
		h(m)	E0'(lx)	e(m)																	
		1.50	549.76	1.91																	
		2.25	644.34	2.37																	
		3.50	700.98	2.93																	
4.00	877.31	3.44																			
60°	693.6 lm			<table><tr><th>h(m)</th><th>E0'(lx)</th><th>e(m)</th></tr><tr><td>1.50</td><td>900.98</td><td>1.29</td></tr><tr><td>2.25</td><td>1002.66</td><td>2.54</td></tr><tr><td>3.50</td><td>1192.59</td><td>3.01</td></tr><tr><td>4.00</td><td>1320.07</td><td>3.60</td></tr></table>	h(m)	E0'(lx)	e(m)	1.50	900.98	1.29	2.25	1002.66	2.54	3.50	1192.59	3.01	4.00	1320.07	3.60		
h(m)	E0'(lx)	e(m)																			
1.50	900.98	1.29																			
2.25	1002.66	2.54																			
3.50	1192.59	3.01																			
4.00	1320.07	3.60																			
100°	732.2 lm			<table><tr><th>h(m)</th><th>E0'(lx)</th><th>e(m)</th></tr><tr><td>1.50</td><td>40.32</td><td>3.28</td></tr><tr><td>2.25</td><td>17.92</td><td>4.92</td></tr><tr><td>3.50</td><td>7.40</td><td>7.65</td></tr><tr><td>4.00</td><td>5.67</td><td>8.74</td></tr></table>	h(m)	E0'(lx)	e(m)	1.50	40.32	3.28	2.25	17.92	4.92	3.50	7.40	7.65	4.00	5.67	8.74		
h(m)	E0'(lx)	e(m)																			
1.50	40.32	3.28																			
2.25	17.92	4.92																			
3.50	7.40	7.65																			
4.00	5.67	8.74																			
单偏25°	886.5 lm			<table><tr><th>h(m)</th><th>E0'(lx)</th><th>e(m)</th></tr><tr><td>1.50</td><td>923.04</td><td>1.39</td></tr><tr><td>2.25</td><td>1103.13</td><td>2.08</td></tr><tr><td>3.50</td><td>1573.82</td><td>3.24</td></tr><tr><td>4.00</td><td>1759.65</td><td>3.70</td></tr></table>	h(m)	E0'(lx)	e(m)	1.50	923.04	1.39	2.25	1103.13	2.08	3.50	1573.82	3.24	4.00	1759.65	3.70		
h(m)	E0'(lx)	e(m)																			
1.50	923.04	1.39																			
2.25	1103.13	2.08																			
3.50	1573.82	3.24																			
4.00	1759.65	3.70																			
双偏25°	1155.0 lm			<table><tr><th>h(m)</th><th>E0'(lx)</th><th>e(m)</th></tr><tr><td>1.50</td><td>983.04</td><td>1.39</td></tr><tr><td>2.25</td><td>1239.13</td><td>2.08</td></tr><tr><td>3.50</td><td>1687.82</td><td>3.24</td></tr><tr><td>4.00</td><td>1883.65</td><td>3.70</td></tr></table>	h(m)	E0'(lx)	e(m)	1.50	983.04	1.39	2.25	1239.13	2.08	3.50	1687.82	3.24	4.00	1883.65	3.70		
h(m)	E0'(lx)	e(m)																			
1.50	983.04	1.39																			
2.25	1239.13	2.08																			
3.50	1687.82	3.24																			
4.00	1883.65	3.70																			

特定选项 Customization Options



调光调色功能
Tunable white




0/1-10V 调光
0/1-10V Dimmable





自然光技术 Ra>90
Sunlike Technology Ra>90



A

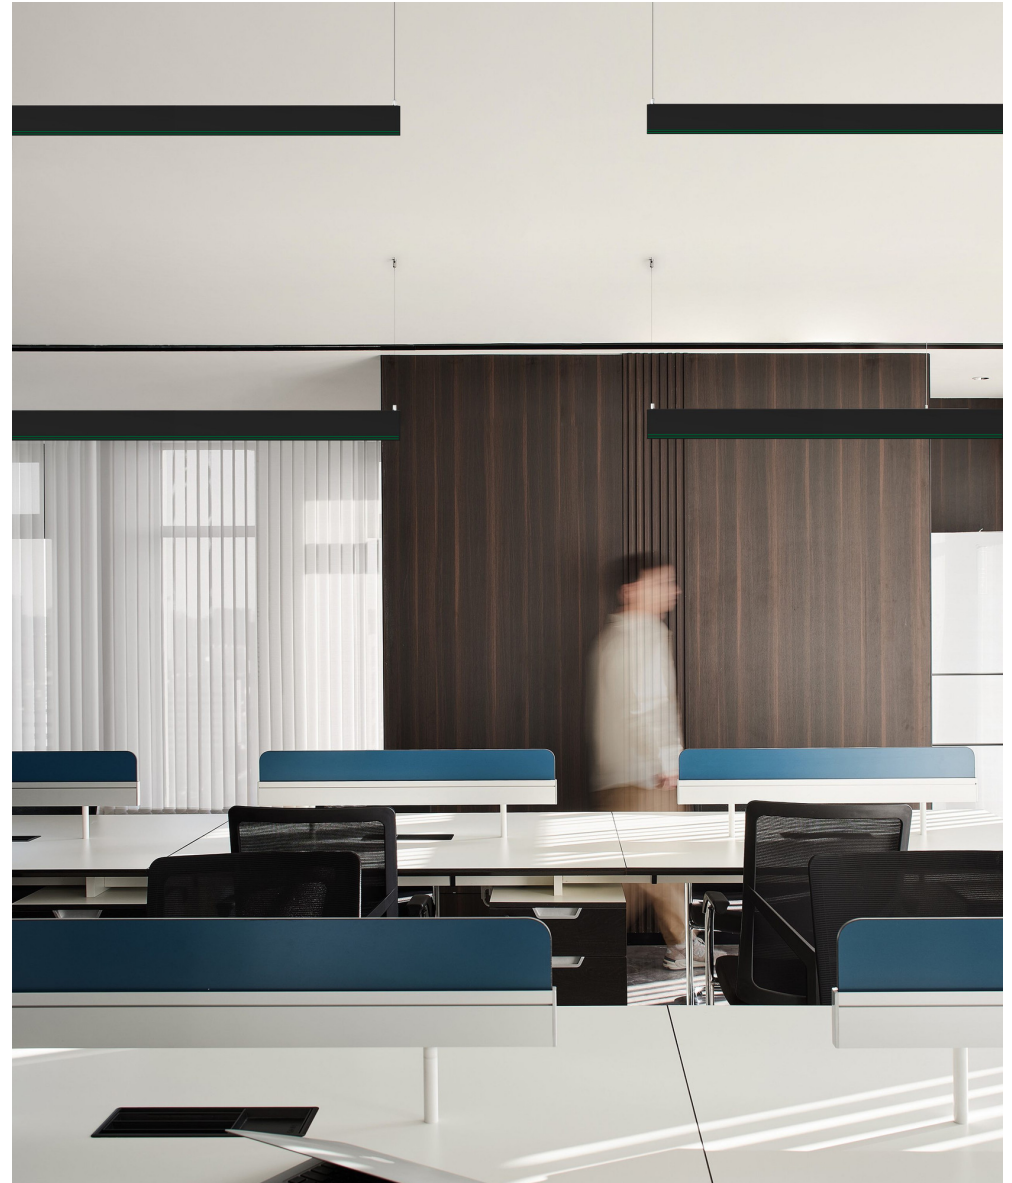


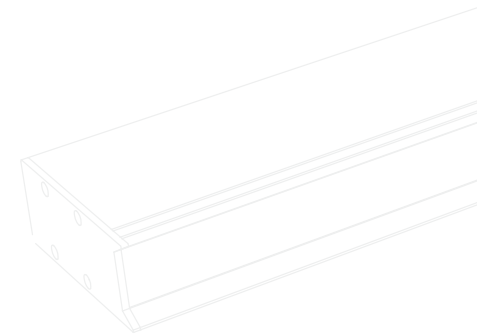


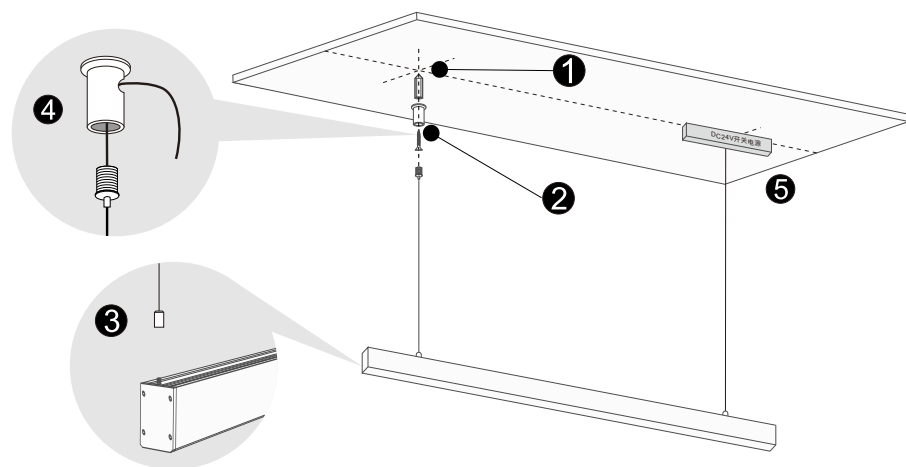


B

The White Shadow series helps designers to achieve a variety of lighting effects, thus ensuring functional realization from its rich angle options: 40 °, 60 °, polarized light 25 °, dual polarized light 25 ° combined with this lamp installation method, can achieve wall cleaning lighting, wall washing lighting, accent lighting and basic lighting in different space environments. The led light source of this series of lamps with high display index (RA92) brings the most comfortable visual experience to customers.

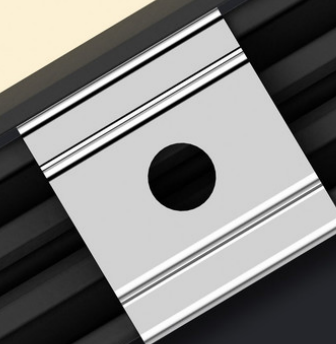

Surface |DOWN Linear light

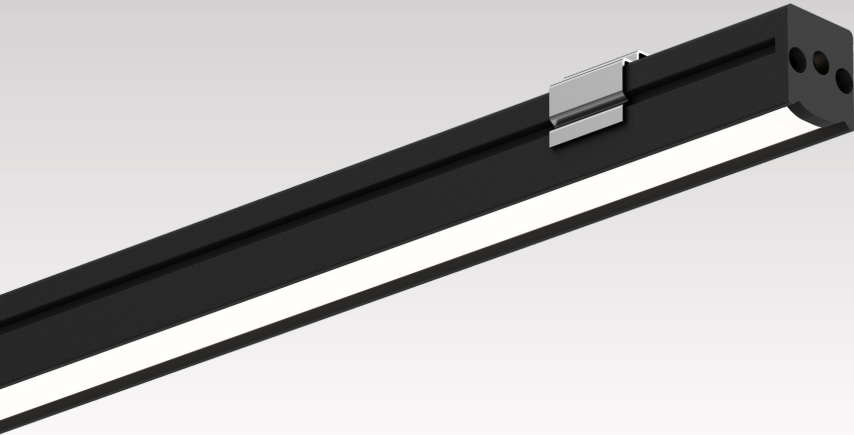

综合特点 General Features



无缝扩散罩
Seamless diffuser



无频闪
Flicker free



室内使用
Indoor



可回收物
Recyclable



CE 认证
CE Certification



IP 20
Protection level



高光效
High luminous efficacy

KLM-XXD1213D/L1000/10W
1000*W12*H13mm

6063 Aluminum

Body color:Sand BK/Sand WH

IP20

Osram/Bridgelux LEDs

DC24V


10W/M

2700K/3000K/4000K

CRI : ≥90

Beam angle: 100°/Asymmetric 25°

External drive



功率 Power	灯具型号 Model	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
10W/M	KLM-XXD1213D/L1000	100°	692.2 lm			<table><tr><th>h(m)</th><th>E0'(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>40.32</td><td>3.28</td></tr><tr><td>2.25</td><td>17.92</td><td>4.92</td></tr><tr><td>3.50</td><td>7.40</td><td>7.65</td></tr><tr><td>4.00</td><td>5.67</td><td>8.74</td></tr></table>	h(m)	E0'(lx)	ø(m)	1.50	40.32	3.28	2.25	17.92	4.92	3.50	7.40	7.65	4.00	5.67	8.74
		h(m)	E0'(lx)	ø(m)																	
1.50	40.32	3.28																			
2.25	17.92	4.92																			
3.50	7.40	7.65																			
4.00	5.67	8.74																			
		单偏25°	706.5 lm			<table><tr><th>h(m)</th><th>E0'(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>697.04</td><td>1.39</td></tr><tr><td>2.25</td><td>743.13</td><td>2.08</td></tr><tr><td>3.50</td><td>797.82</td><td>3.24</td></tr><tr><td>4.00</td><td>813.65</td><td>3.70</td></tr></table>	h(m)	E0'(lx)	ø(m)	1.50	697.04	1.39	2.25	743.13	2.08	3.50	797.82	3.24	4.00	813.65	3.70
h(m)	E0'(lx)	ø(m)																			
1.50	697.04	1.39																			
2.25	743.13	2.08																			
3.50	797.82	3.24																			
4.00	813.65	3.70																			



特定选项 Customization Options



调光调色功能
Tunable white



0/1-10V 调光
0/1-10V Dimmable



自然光技术 Ra>90
Sunlike Technology Ra>90








Beyond what you want to lead the future

B



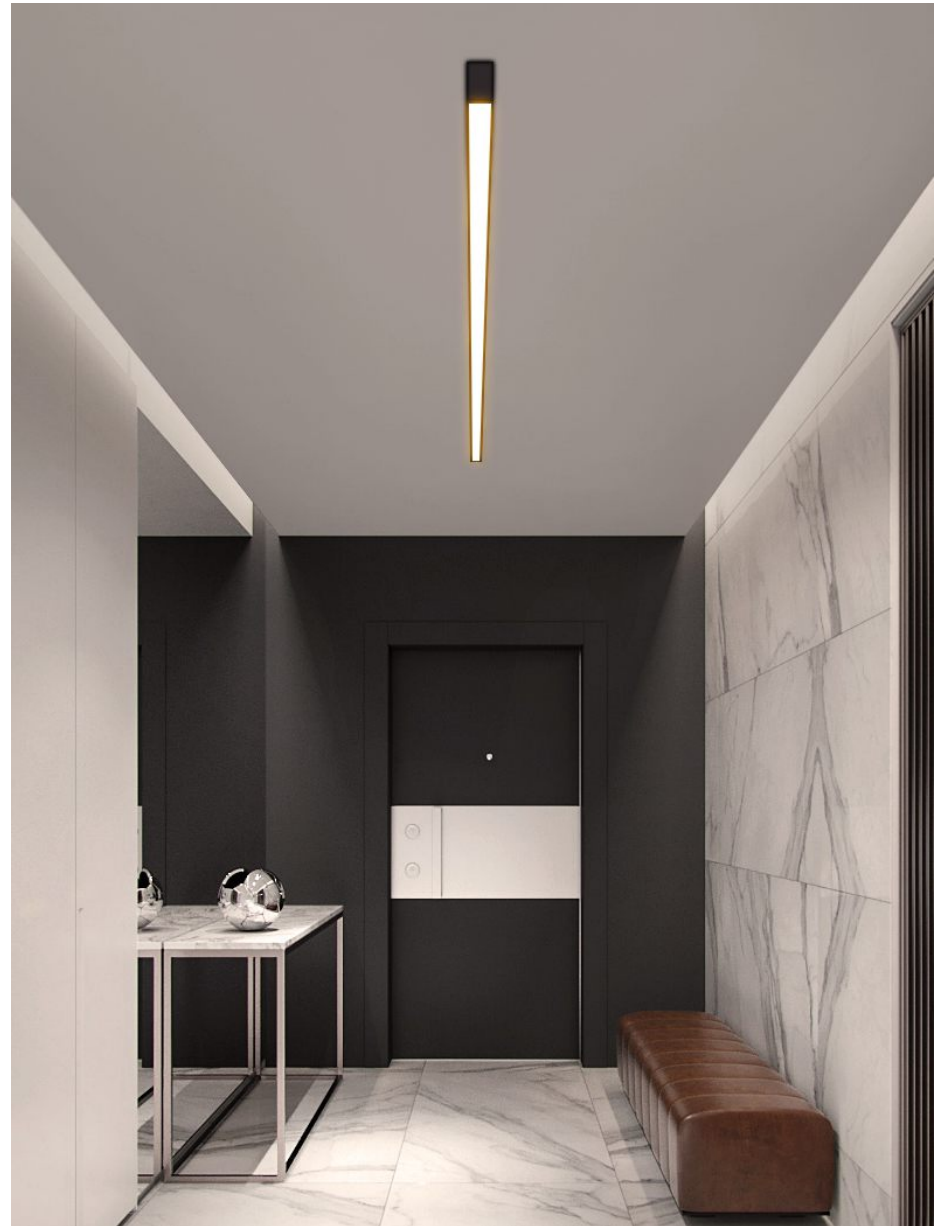

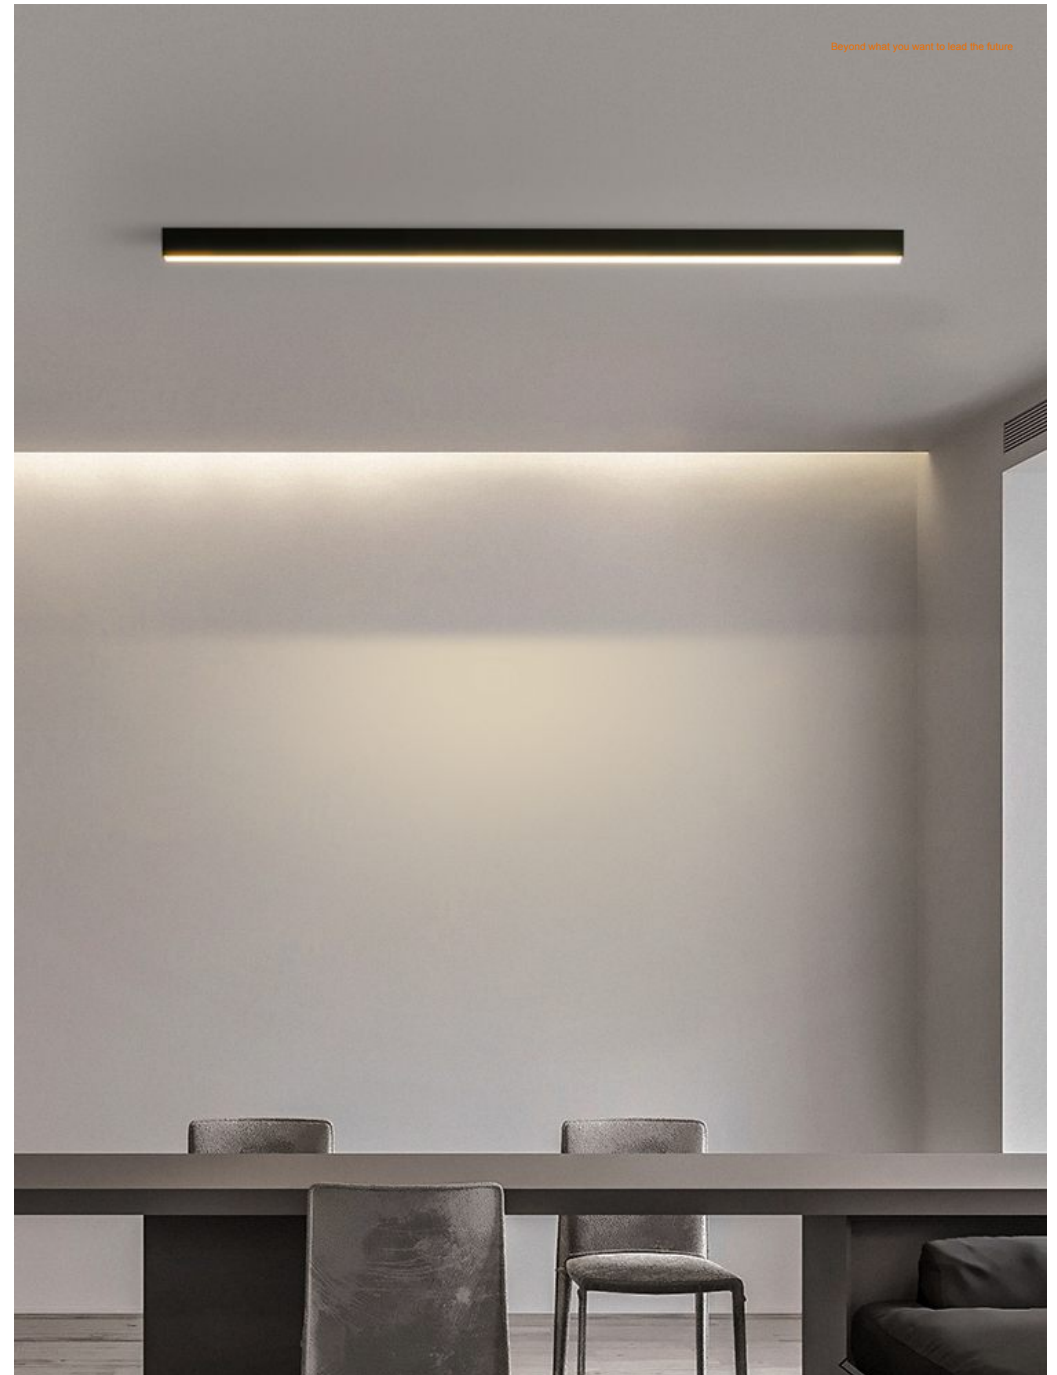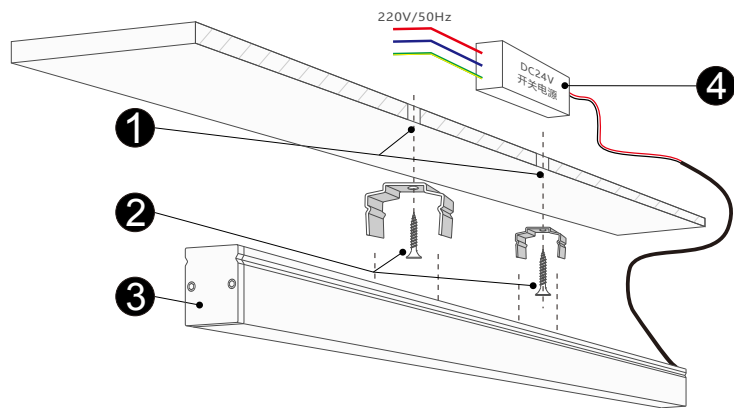

C

White Shadow Series C has, hanging installation: hanging from the ceiling with hanging wire, which is also ideal for creating accent lighting, mainly used in spacious spaces, above the dining table and so on. Visible installation: no need for slotting, visible linear lamp installed in the ceiling or wall, more suitable for low ceiling height led to the chandelier is too low. The installation method can be selected according to the height of different floors.

Adjustable|180° Linear light



Three sided Glow



Up&Down Separate ON/OFF




Hand Sweeper Switch

180° adjustable

180° adjustable

KLM-XXD1842D/L1000/26W
L1000*W18*H42mm
6063 Aluminum
Body color:Sand BK/Sand WH
IP20
Osram/Bridgelux LEDs
DC24V
16W+10W 2700K/3000K/4000K
CRI ≥90 180°
External driver



综合特点 General Features



无缝扩散罩
Seamless diffuser



无频闪
Flicker free



室内使用
Indoor



可回收物
Recyclable



CE 认证
CE Certification



IP 20
防护等级
Protection level



高光效
High luminous
efficacy

Beyond what you want to lead the future


UP:

功率 Power	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
10W	100°	236.2 lm																		
					<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>40.32</td><td>3.28</td></tr><tr><td>2.25</td><td>17.92</td><td>4.92</td></tr><tr><td>3.50</td><td>7.40</td><td>7.65</td></tr><tr><td>4.00</td><td>5.67</td><td>8.74</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	40.32	3.28	2.25	17.92	4.92	3.50	7.40	7.65	4.00	5.67	8.74
h(m)	E0°(lx)	ø(m)																		
1.50	40.32	3.28																		
2.25	17.92	4.92																		
3.50	7.40	7.65																		
4.00	5.67	8.74																		



DOWN:

功率 Power	灯具型号 Model	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
⚡	▬	▲	lm																		
16W	KLM-XXD1842D/L1000	120°	499.7 lm			<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>480.75</td><td>8.45</td></tr><tr><td>2.25</td><td>562.22</td><td>12.68</td></tr><tr><td>3.50</td><td>610.42</td><td>19.72</td></tr><tr><td>4.00</td><td>777.98</td><td>22.53</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	480.75	8.45	2.25	562.22	12.68	3.50	610.42	19.72	4.00	777.98	22.53
h(m)	E0°(lx)	ø(m)																			
1.50	480.75	8.45																			
2.25	562.22	12.68																			
3.50	610.42	19.72																			
4.00	777.98	22.53																			

Adjustable Design



Mounting Mode

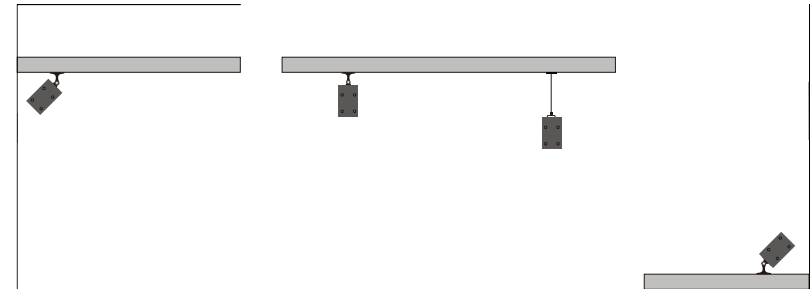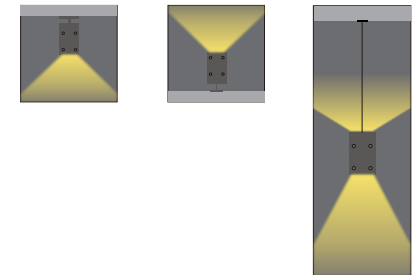

特定选项 Customization Options



调光调色功能
Tunable white



0/1-10V 调光
0/1-10V Dimmable



自然光技术 Ra>90
Sunlike Technology Ra>90

Adjustable|180° Linear light



Three sided Glow




Up&Down Separate ON/OFF




Hand Sweeper Switch

180° adjustable



KM-XD2045D/L1000/30W
L1000*W20*H45mm
6063 Aluminum
Body color:Sand BK/Sand WH
IP20
Osram/Bridgelux LEDs
DC24V
20W+10W
2700K/3000K/4000K CRI :≥90
180°
External driver



综合特点 General Features



无缝扩散罩
Seamless diffuser



无频闪
Flicker Free



室内使用
Indoor Use



可回收物
Recyclable



CE 认证
CE Certification



防护等级
Protection level



高光效
High luminous efficacy

Beyond what you want to lead the future


UP:

功率 Power	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
		lm																		
10W	100°	236.2 lm																		
					<table><tr><th>h(m)</th><th>E0'(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>40.32</td><td>3.28</td></tr><tr><td>2.25</td><td>17.92</td><td>4.92</td></tr><tr><td>3.50</td><td>7.40</td><td>7.65</td></tr><tr><td>4.00</td><td>5.67</td><td>8.74</td></tr></table>	h(m)	E0'(lx)	ø(m)	1.50	40.32	3.28	2.25	17.92	4.92	3.50	7.40	7.65	4.00	5.67	8.74
h(m)	E0'(lx)	ø(m)																		
1.50	40.32	3.28																		
2.25	17.92	4.92																		
3.50	7.40	7.65																		
4.00	5.67	8.74																		



DOWN:

功率 Power	灯具型号 Model	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
⚡	▬	▲	lm																		
20W	KLM-XXD2045D/L1000	120°	620.7 lm			<table><thead><tr><th>h(m)</th><th>E0'(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>556.75</td><td>8.45</td></tr><tr><td>2.25</td><td>625.22</td><td>12.68</td></tr><tr><td>3.50</td><td>750.42</td><td>15.72</td></tr><tr><td>4.00</td><td>897.98</td><td>18.53</td></tr></tbody></table>	h(m)	E0'(lx)	ø(m)	1.50	556.75	8.45	2.25	625.22	12.68	3.50	750.42	15.72	4.00	897.98	18.53
h(m)	E0'(lx)	ø(m)																			
1.50	556.75	8.45																			
2.25	625.22	12.68																			
3.50	750.42	15.72																			
4.00	897.98	18.53																			

Adjustable Design



Mounting Mode

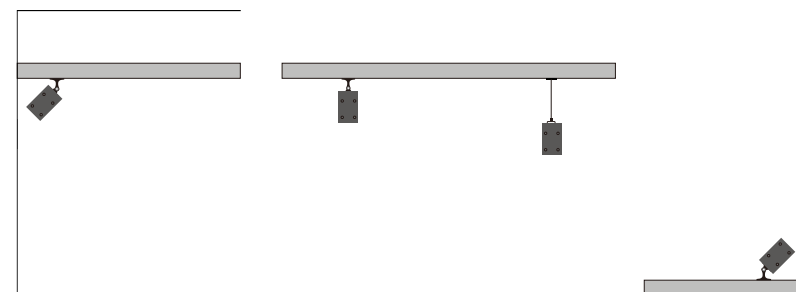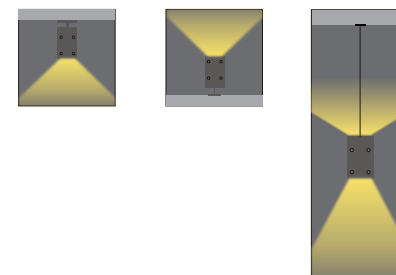

特定选项 Customization Options



调光调色功能
Tunable white



0/1-10V 调光
0/1-10V Dimmable



自然光技术 Ra>90
Sunlike Technology Ra>90

Adjustable|180° Linear light



Three sided Glow



Up&Down Separate ON/OFF



Hand Sweeper Switch

180° adjustable

180° adjustable

KLM-XXD2158D/L1000/34W

1000*W21*H58mm

6063 Aluminum

Body color:Sand BK/Sand WH

IP20

Osram/Bridgelux LEDs

DC24V


24W+10W

2700K/3000K/4000K

CRI :≥90

180°

External driver



综合特点 General Features



无缝扩散罩
Seamless diffuser



无频闪
Flicker free



室内使用
Indoor



可回收物
Recyclable



CE 认证
CE Certification



防护等级
Protection level



高光效
High luminous efficacy

Beyond what you want to lead the future


UP:

功率 Power	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
⚡ 10W	▲ 100°	lm 236.2 lm			<table><thead><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>40.32</td><td>3.28</td></tr><tr><td>2.25</td><td>17.92</td><td>4.92</td></tr><tr><td>3.50</td><td>7.40</td><td>7.65</td></tr><tr><td>4.00</td><td>5.67</td><td>8.74</td></tr></tbody></table>	h(m)	E0°(lx)	ø(m)	1.50	40.32	3.28	2.25	17.92	4.92	3.50	7.40	7.65	4.00	5.67	8.74
h(m)	E0°(lx)	ø(m)																		
1.50	40.32	3.28																		
2.25	17.92	4.92																		
3.50	7.40	7.65																		
4.00	5.67	8.74																		



DOWN:

功率 Power	灯具型号 Model	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
			lm																		
24W	KLM-XXD2158D/L1000	140°	730.7 lm			<table><thead><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>656.75</td><td>8.45</td></tr><tr><td>2.25</td><td>775.22</td><td>12.68</td></tr><tr><td>3.50</td><td>801.42</td><td>19.72</td></tr><tr><td>4.00</td><td>867.98</td><td>22.53</td></tr></tbody></table>	h(m)	E0°(lx)	ø(m)	1.50	656.75	8.45	2.25	775.22	12.68	3.50	801.42	19.72	4.00	867.98	22.53
h(m)	E0°(lx)	ø(m)																			
1.50	656.75	8.45																			
2.25	775.22	12.68																			
3.50	801.42	19.72																			
4.00	867.98	22.53																			

Adjustable Design



Mounting Mode

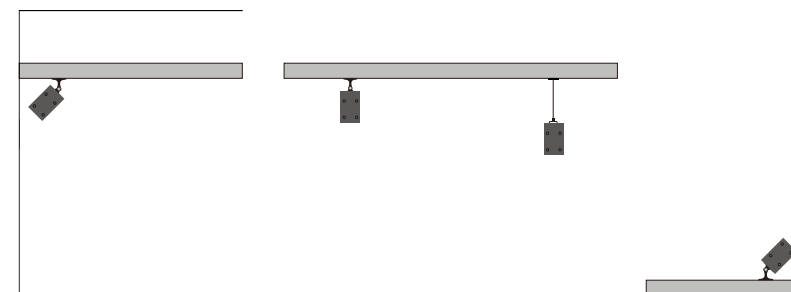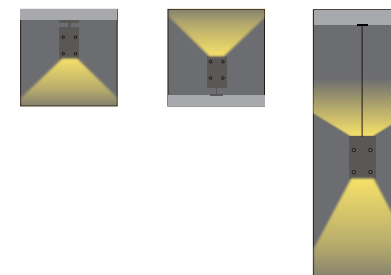

特定选项 Customization Options



调光调色功能
Tunable white



0/1-10V 调光
0/1-10V Dimmable



自然光技术 Ra>90
Sunlike Technology Ra>90

Adjustable|180° Linear light



Three sided Glow



Up&Down Separate ON/OFF



Hand Sweeper Switch

180° adjustable

180° adjustable

KLM-XXD3050D/L1000/38W

1000*W30*H50mm

6063 Aluminum

Body color: Sand BK/Sand WH

IP20

Osram/Bridgelux LEDs

DC24V

28W+10W

2700K/3000K/4000K

CRI: ≥90

180°

External driver

综合特点 General Features



无缝扩散罩
Seamless Diffuser



无频闪
Flicker Free



室内使用
Indoor Use



可回收物
Recyclable




CE 认证
CE Certification



防护等级
Protection level



高光效
High luminous
efficacy




UP:

功率 Power	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
⚡	🔦	lm																		
10W	100°	236.2 lm																		
<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>40.32</td><td>3.28</td></tr><tr><td>2.25</td><td>17.92</td><td>4.92</td></tr><tr><td>3.50</td><td>7.40</td><td>7.65</td></tr><tr><td>4.00</td><td>5.67</td><td>8.74</td></tr></table>						h(m)	E0°(lx)	ø(m)	1.50	40.32	3.28	2.25	17.92	4.92	3.50	7.40	7.65	4.00	5.67	8.74
h(m)	E0°(lx)	ø(m)																		
1.50	40.32	3.28																		
2.25	17.92	4.92																		
3.50	7.40	7.65																		
4.00	5.67	8.74																		



DOWN:

功率 Power	灯具型号 Model	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
			lm																		
28W	KLM-XXD3050D/L1000	120°	913.7lm			<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>706.75</td><td>8.45</td></tr><tr><td>2.25</td><td>810.22</td><td>12.68</td></tr><tr><td>3.50</td><td>893.42</td><td>19.72</td></tr><tr><td>4.00</td><td>1010.98</td><td>22.53</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	706.75	8.45	2.25	810.22	12.68	3.50	893.42	19.72	4.00	1010.98	22.53
h(m)	E0°(lx)	ø(m)																			
1.50	706.75	8.45																			
2.25	810.22	12.68																			
3.50	893.42	19.72																			
4.00	1010.98	22.53																			

Adjustable Design



Mounting Mode

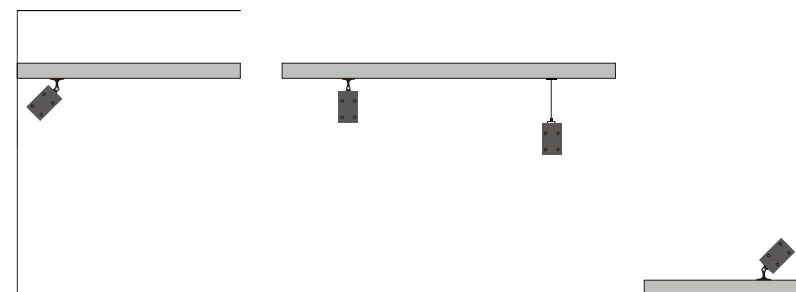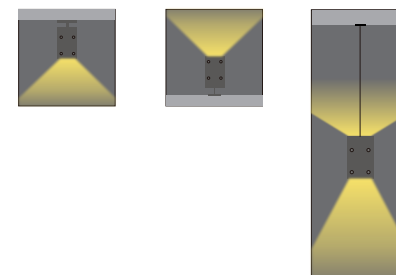

特定选项 Customization Options



调光调色功能
Tunable white



0/1-10V 调光
0/1-10V Dimmable



自然光技术 Ra>90
Sunlike Technology Ra>90

Adjustable|180° Linear light



Three sided Glow



Up&Down Separate ON/OFF




Hand Sweeper Switch

180° Adjustable

180° Adjustable

KLM-XXD4065D/L1000/43W
L1000*W40*H65mm
6063 Aluminum
Body color:Sand BK/Sand WH
IP20
Osram/Bridgelux LEDs
DC24V
33W+10W
2700K/3000K/4000K
CRI :≥90
180°
External driver



综合特点 General Features



无缝扩散罩
Seamless Diffuser



无频闪
Flicker Free



室内使用
Indoor



可回收物
Recyclable



CE 认证
CE Certification




IP 20
防护等级
Protection level




高光效
High luminous
efficacy

Beyond what you want to lead the future


UP:

功率 Power	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Lux Diagram															
		lm																		
10W	100°	236.2 lm																		
					<table><thead><tr><th>h(m)</th><th>E0'(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>40.32</td><td>3.28</td></tr><tr><td>2.25</td><td>17.92</td><td>4.92</td></tr><tr><td>3.50</td><td>7.40</td><td>7.65</td></tr><tr><td>4.00</td><td>5.67</td><td>8.74</td></tr></tbody></table>	h(m)	E0'(lx)	ø(m)	1.50	40.32	3.28	2.25	17.92	4.92	3.50	7.40	7.65	4.00	5.67	8.74
h(m)	E0'(lx)	ø(m)																		
1.50	40.32	3.28																		
2.25	17.92	4.92																		
3.50	7.40	7.65																		
4.00	5.67	8.74																		



DOWN:

功率 Power	灯具型号 Model	光束角 Beam Angle	光通量 Luminous flux	效果图 Rendering	配光曲线 Distribution	照度图 Luk Diagram															
			lm																		
33W	KLM-XXD4065D/L1000	120°	1150 lm			<table><thead><tr><th>h(m)</th><th>E0'(lx)</th><th>ø(m)</th></tr></thead><tbody><tr><td>1.50</td><td>806.75</td><td>8.45</td></tr><tr><td>2.25</td><td>891.22</td><td>12.68</td></tr><tr><td>3.50</td><td>921.42</td><td>19.72</td></tr><tr><td>4.00</td><td>1170.98</td><td>22.53</td></tr></tbody></table>	h(m)	E0'(lx)	ø(m)	1.50	806.75	8.45	2.25	891.22	12.68	3.50	921.42	19.72	4.00	1170.98	22.53
h(m)	E0'(lx)	ø(m)																			
1.50	806.75	8.45																			
2.25	891.22	12.68																			
3.50	921.42	19.72																			
4.00	1170.98	22.53																			

Adjustable Design



Mounting Mode

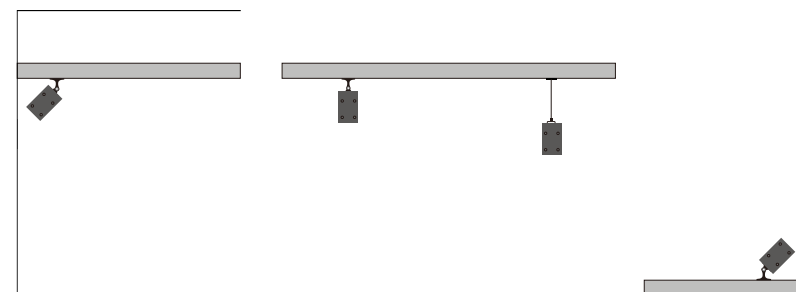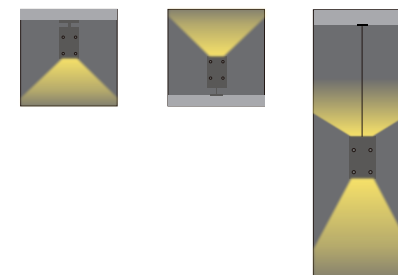

特定选项 Customization Options



调光调色功能
Tunable white



0/1-10V 调光
0/1-10V Dimmable



自然光技术 Ra>90
Sunlike Technology Ra>90



